CONCRETE CONSTRUCTION MADE EASY

2

STATE OF MISSOURI
REGISTERED
PROFESSIONAL
ENGINEER
S.M.DYER
NUMBER
E-1463

REGISTERED
STATE OF MISSOURI
S. M. DYER
NUMBER
E-149
PROFESSIONAL ENGINEER

CONCRETE CONSTRUCTION MADE EASY

CONCRETE CONSTRUCTION MADE EASY

GIVING DESIGNS, TABLES, DATA, AND OTHER INFORMATION TO AID BUILDERS TO CARRY OUT SIMPLE KINDS OF CONCRETE STRUCTURES

BY

LESLIE TURNER

B.Sc., A.M.Inst.C.E., F.G.S.

AND

ALBERT LAKEMAN

L.R.I.B.A., M.I.Struct.E.

LONDON:

CONCRETE PUBLICATIONS LIMITED

20 DARTMOUTH STREET, WESTMINSTER, S.W 1

Made and Printed in Great Britain by Butler & Tanner Ltd., Frome and London

Preface

THIS book is primarily intended for the use of engineers, architects, contractors, and builders who have concrete building work on hand for which the reinforced concrete details have not been prepared or cannot be quickly obtained. It is also hoped that it will be of assistance to students entering the industry, either on the designing or the constructional side.

With the aid of the designs given it is possible to erect a small building, tank, retaining wall, etc., the details and operations being described in as simple a manner as is possible with a somewhat complicated subject.

The designs are based on the use of a good class cement and aggregates. The factor of safety is practically that specified by the L.C.C. Regulations, although the designs do not comply with these regulations in every respect.

Owing to the diversity of planning it is obviously impossible to cover every circumstance in a limited space, so that the designs have been standardised. This process makes for simplicity rather than economy in material, although this may result in ultimate economy in the cost of works.

Before these details are studied it is recommended that Chapter XI (General Specification and Notes) be read; while before any work is undertaken this chapter must be most carefully studied and followed.

It should be understood that specialist advice must be obtained for works of any magnitude or exceptional difficulty; the present volume has been written to assist those who might otherwise carry out reinforced concrete work of the smaller kind without sufficient knowledge of the subject to ensure a sound structure. In such cases, if the designs given herein are carefully followed, coupled with good materials and workmanship, there should be no possibility of failure; thus economies are hereby made available to those who might otherwise use different materials because of their unfamiliarity with reinforced concrete.

LESLIE TURNER.
ALBERT LAKEMAN.

September, 1929.

Contents

PAGE

CHAPTER I

FOUNDATIONS 1
Foundation Pressures—Footings for Reinforced Concrete Columns and Steel Stanchions—Excavation—Reinforcement—Formwork—Quantities—Wall Footings—Footings to Bearing Walls—Raft Foundations for Small Buildings.

CHAPTER II

COLUMNS 12
Quantities—Formwork—Erection of Forms—Reinforcement—Concreting.

CHAPTER III

BEAMS 19
Single or One-Span Beams—Determination of Dimensions, etc.—Wall Bearings—Notes on Construction—Length of Bars—Formwork—Striking of Formwork—Materials—Continuous Beams: Wall and External Beams—Single-Span Beams—Continuous-Span Beams—Modification to Sections of Beams.

CHAPTER IV

LINTELS 34
Formwork—Lifting.

CHAPTER V

FLOOR AND ROOF SLABS 39
Loading and Supporting of Slabs—Formwork—Placing of Reinforcement—Concreting—Finishes to Slabs—Single-Span Slabs—Continuous-Span Slabs—Quantities—Roof Slabs.

CHAPTER VI

PANEL WALLS 51

CHAPTER VII

STAIRCASES 53
Pre-cast Steps—In Situ Stairs—Section of Steps—Baluster Fixing—Surface Finish—Constructional Details—Reinforcement—Formwork.

PAGE

CHAPTER VIII

Saw Tooth Roofs 69
Method of Manufacture—Reinforcement—Handling Trusses—Design of Trusses.

CHAPTER IX

Water Tanks 84
Tanks above Ground Level—Floor—Walls—Quantities—Tanks below Ground Level—Quantities—Modifications for Smaller Tanks.

CHAPTER X

Retaining Walls 94
Excavation—Shuttering—Reinforcement—Removal of Shuttering—Modifications for Lower Walls—Expansion Joints—Returns and Angles—Sloping Sites.

CHAPTER XI

General Specification and Notes 105

Other Books on Concrete 115

CHAPTER I

Foundations

THE foundations treated herein comprise the simpler types, viz., footings to concrete columns, steel stanchions, wall footings, and small raft foundations for buildings.

Of all the members of a structure it is for several reasons false economy to skimp the design of and quantities in foundations. First, on their rigidity depends the stability of the whole structure, and should any serious settlement take place, owing to over-rating of the capability of the ground of sustaining pressure, it is a most difficult and exceedingly costly matter to rectify, even if the building has not been pronounced dangerous and unsafe. Second, as the work in connection with foundations occurs near or just below ground level, the cost per cube foot of concrete is usually a minimum here, so that really very little total cost is saved by reduction.

Probably the most common fault in small foundation work is that of not taking them deep enough. This is a very general and often obvious defect in much house property, both old and new, where differential settlement is regarded more as a necessary and expected evil (no doubt consequent on economic pressure) rather than the fruits of negligence. Apart from the actual carrying capacity of the ground it should be remembered that the effect of weather changes, particularly frost and drought, are felt some distance down. The depth will vary with the nature of the soil and subsoil, climatic conditions, etc., but generally speaking in England in average ground the effects are in due time apparent where the depth is under 3 ft. The external or exposed footings should therefore always be taken deeper than this, unless other circumstances render it unnecessary.

A further point to be watched is to see that the load in all cases comes down right over the centre of gravity of the footing, otherwise eccentricities and probable unequal settlements will take place, tipping the footing or overstraining the columns above.

Foundation Pressures.

As the strata forming the surface of the earth vary from site to site, and pass through every gradation from hard rock to soft mud, it is obviously impossible to define precisely the limits of any particular type, such as clay. The final arbiter of the safe bearing value of any particular surface will be practical experience and judgment; nevertheless the following table will serve as an approximate guide. It may also be remembered that in some comparatively soft strata, such as sand, higher permissible pressures can be obtained by taking the footing much deeper.

Description of Ground.	Maximum allowable Bearing Pressure in Tons per sq. ft.
Silt, morass, mud, peat, alluvial deposits, made-up ground tipped not less than 10 years	0—½
Natural bed of soft clay, wet or loose sand, soft sandstone	1
Natural bed of ordinary clay or confined sand	2
Natural bed of compact gravel, stiff clays and solid chalk	4
Natural beds of hard sandstones, limestones, etc.	6—10
Natural beds of igneous rocks (granites, whinstones, etc.)	15 upwards

Footings for Reinforced Concrete Columns and Steel Stanchions.

The loads to be carried may be computed in the manner given for columns. *Tables* 1, 2 and 3 give the sizes necessary, and the design for isolated or "blob" footings to carry the maximum loads specified on ground capable of safely sustaining 1, 2 and 4 tons per sq. ft. When supporting steel stanchions, base-plates to the latter must be provided and when supporting concrete columns lap bars must be provided (see *Fig.* 1) of at least the same diameter and number as the column bars. These lap bars must extend from 1 in. above the footing base to a height 24 times their diameter up the column, well bound with links and secured by one or two links within the base itself. To secure stanchion base-plates, bolts must be cast in or other provision made. If holes are left the footing should be brought up square (as shown dotted) and not sloped. *Fig.* 1 shows a typical elevation and plan of all the footings.

It will be noticed that the size of the footing at its top (B), where

TABLE 1.

SQUARE FOOTINGS.

For safe ground pressure of 1 *Ton per sq. ft.*

Maximum Load to be Carried. tons.	Size in Plan S ft. and ins.	Thickness T ins.	Reinforcement. Number of bars each way.	Reinforcement. Diam. of bars ins.	Notes.
4	2·0 × 2·0	8	4	$\frac{5}{16}$	
6	2·6 × 2·6	9	4	$\frac{3}{8}$	
9	3·0 × 3·0	11	5	$\frac{3}{8}$	
12	3·6 × 3·6	12	6	$\frac{3}{8}$	
16	4·0 × 4·0	14	8	$\frac{3}{8}$	
20	4·6 × 4·6	15	8	$\frac{7}{16}$	
25	5·0 × 5·0	18	9	$\frac{7}{16}$	
36	6·0 × 6·0	21	9	$\frac{1}{2}$	B must not be less than S/5. Footings may be made as shown by dotted lines.
49	7·0 × 7·0	24	12	$\frac{1}{2}$	
64	8·0 × 8·0	27	10	$\frac{5}{8}$	
81	9·0 × 9·0	30	14	$\frac{5}{8}$	
100	10·0 × 10·0	32	12	$\frac{3}{4}$	

TABLE 2.

SQUARE FOOTINGS.

For safe ground pressure of 2 *Tons per sq. ft.*

Maximum Load to be Carried. tons.	Size in Plan S ft. and ins.	Thickness T ins.	Reinforcement. Number of bars each way.	Reinforcement. Diam. of bars ins.	Notes.
8	2·0 × 2·0	9	4	$\frac{5}{16}$	
12	2·6 × 2·6	12	4	$\frac{3}{8}$	
18	3·0 × 3·0	14	5	$\frac{7}{16}$	
24	3·6 × 3·6	15	5	$\frac{1}{2}$	
32	4·0 × 4·0	18	7	$\frac{1}{2}$	B must not be less than S/4. Footings may be made as shown by dotted lines.
40	4·6 × 4·6	20	8	$\frac{1}{2}$	
50	5·0 × 5·0	21	7	$\frac{5}{8}$	
72	6·0 × 6·0	26	7	$\frac{3}{4}$	
98	7·0 × 7·0	30	9	$\frac{3}{4}$	

TABLE 3.

SQUARE FOOTINGS.

For safe ground pressure of 4 Tons per sq. ft.

Maximum Load to be Carried. tons.	Size in Plan S ft. and ins.	Thickness T ins.	Reinforcement. Number of bars each way.	Reinforcement. Diam. of bars ins.	Notes.
10	1·6 × 1·6	10	4	$\frac{5}{16}$	
16	2·0 × 2·0	12	5	$\frac{3}{8}$	
24	2·6 × 2·6	15	5	$\frac{7}{16}$	
36	3·0 × 3·0	18	6	$\frac{1}{2}$	As above, i.e. B must not be less than S/4.
48	3·6 × 3·6	21	7	$\frac{1}{2}$	
64	4·0 × 4·0	24	6	$\frac{5}{8}$	
80	4·6 × 4·6	27	8	$\frac{5}{8}$	
100	5·0 × 5·0	30	7	$\frac{3}{4}$	

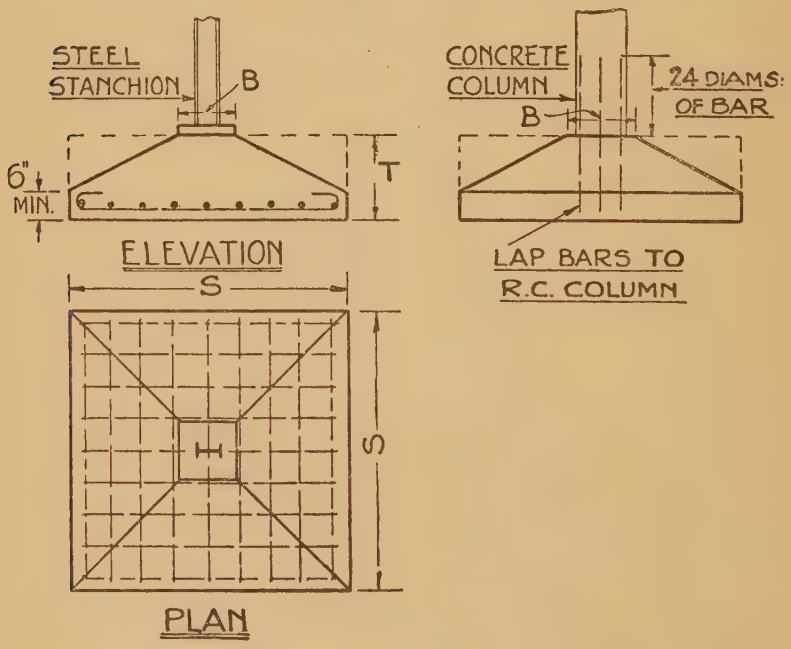

Fig. 1.

the slope from the minimum 6-in. thickness finishes, must not be less than one-quarter or one-fifth of the side of the footing according to the ground pressure selected. Footings may, of course, be brought up square to their full height (T), as indicated by the dotted lines. Thus at the cost of a small extra expenditure of concrete the difficulty of shuttering and concreting the upper slopes may be obviated.

All the footings have been designed so that the following stresses are not exceeded :

Compression in concrete = 600 lbs. per sq. in.
Tension in steel = 16,000 lbs. per sq. in.

for which 1 : 2 : 4 Portland cement concrete and mild steel are suitable.

Excavation.

The holes for isolated footings must be taken down to a level bottom and, where necessary, they must be timbered to prevent earth falling in. Also, unless the excavation is very compact and dry, or consists of rock, two or three inches of concrete should be spread over the bottom and levelled to form a firm and clean bottom from which to work.

Reinforcement.

As will be seen from *Fig.* 1, the reinforcement consists of a mesh of bars, hooked both ends, wired up at equal intervals and placed in the bottom of the footing. The cover under the bars less than $\frac{1}{2}$-in. diameter is to be $\frac{1}{2}$ in., and for $\frac{1}{2}$-in. bars and over, 1 inch. It should be noted that the number of bars given in the Tables is for one direction or layer only. The lengths of the bars are as under, where S represents the side of the footing.



DIAM: OF BAR - $\frac{3}{8}$" & UNDER, $\frac{1}{2}$" & $\frac{7}{16}$", $\frac{5}{8}$" & $\frac{3}{4}$".
TOTAL LGTH: REQD:- S+6", S+9", S+12".

The mesh can be supported on four small blocks or stools of concrete $\frac{1}{2}$ in. or 1 in. thick, or on bars of those diameters. The vertical lap bars must also be placed in position and secured by cross bracing to the shuttering before concreting is commenced.

Formwork.

If the sides are taken up vertically to the top a hollow box must be constructed, sides only, without top and bottom to be rigid when full of concrete and while being tamped.

In the case of the sloped footings the box must extend to the 6-in. height, after which trapezoidal forms must be fixed to shutter the slopes. It is essential that this be done so that the concrete can be thoroughly rammed against the underside of the forms to produce a dense concrete

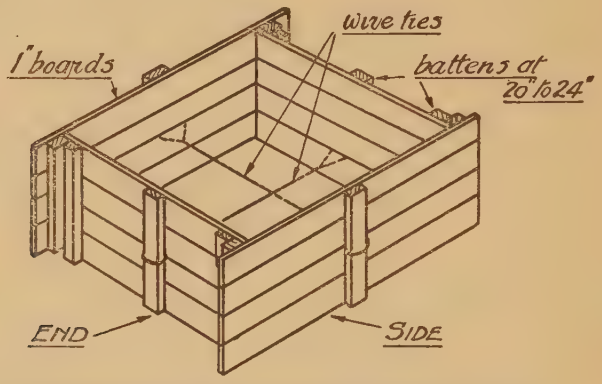

FORMWORK FOR SQUARE FOOTINGS

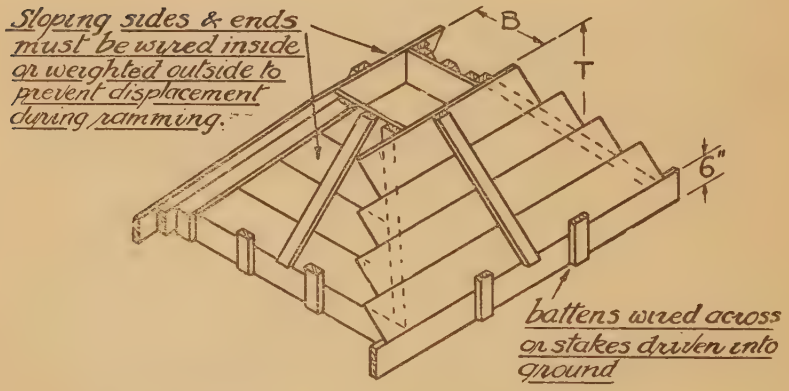
Sloping sides & ends must be wired inside or weighted outside to prevent displacement during ramming.
B
T
6"
battens wired across or stakes driven into ground

FORMWORK FOR SLOPING TOP FOOTINGS

Fig. 2.

on top ; to attempt to concrete without the sloping forms is slovenly and most inefficient.

An illustration of the two types is given in *Fig.* 2, from which the method of construction can be clearly seen.

Quantities.

The volume of concrete and the weight of steel [both layers taken; but excluding column lap bars which will depend on the design of the column (see Columns)] are given in *Table* 4. The quantities of concrete have been taken out for both the square type and the sloping type of footing; the steel, however, remains the same in both cases.

TABLE 4.

QUANTITIES IN FOOTINGS.

Footing.		Quantities.			Footing.		Quantities.		
Size in ft. and ins. S	Thickness in ins. T	Concrete in cube feet.		Steel. lbs.	Size in ft. and ins. S	Thickness in ins. T	Concrete in cube feet.		Steel. lbs.
		Square type.	Sloping type.				Square type.	Sloping type.	
1.6×1.6	10	1·87	1·45	4·2	4.6×4.6	15	25·3	16·3	43·5
						20	33·6	20·5	56·0
2.0×2.0	8	2·66	2·28	5·25		27	45·5	25·6	91·0
	9	3·0	2·44	5·25	5.0×5.0	18	37·5	22·8	53
	12	4·0	2·88	9·5		21	43·7	26·1	89
2.6×2.6	9	4·7	3·77	9·0		30	62·5	34·3	126
	12	6·25	4·50	9·0	6.0×6.0	21	63	36·5	82
	15	7·8	5·18	16·6		26	78	44·0	146
3.0×3.0	11	8·25	6·04	13·2	7.0×7.0	24	98	55	125
	14	10·50	7·12	18·0		30	123	68	215
	18	13·50	8·44	30·0	8.0×8.0	27	144	78	188
3.6×3.6	12	12·2	8·64	18·0	9.0×9.0	30	203	108	292
	15	15·4	10·1	28·5	10.0×10.0	32	267	139	396
	21	21·5	12·8	40·0					
4.0×4.0	14	18·7	12·4	27·0					
	18	24·0	15·0	44·5					
	24	32·0	18·5	62·4					

Wall Footings.

The advantages gained by using reinforced concrete footings compared with ordinary mass concrete footings for masonry or concrete walls lie in the fact that the load can be spread longitudinally as well as laterally, and this is often of great value in variable ground.

Thin concrete walls or brick panel walls in a frame building require, of course, only nominal foundations in ordinary ground. It must be remembered, however, that a reinforced concrete wall monolithic with columns at intervals, will act as a deep beam and will either hang on the columns at its ends or will pick up load from the columns (to the relief

of their footings) and transfer it to the wall footing should the latter not settle equally with the column footings. This subject is, however, too wide to be discussed further here, and in the event of such complications arising expert advice should be sought.

A suitable footing for a light concrete panel wall (i.e. one not carrying loads from floors above which are taken on the frame of beams and columns) is shown in *Fig.* 3.



Fig. 3.



Fig. 4.



Fig. 5.

A brick panel wall 9 in. thick and 15 ft. high would be suitably served by the footing shown in *Fig.* 4 if in uniform and good ground. The pressure on the foundation is under half a ton per square foot, so that it would serve for most sites. For very poor sites, however, the width, depth, and reinforcement must be increased proportionately. In the case of variable ground with soft patches, considerable additional rigidity can be gained by increasing the depth of the footing, increasing the longitudinal reinforcement, and also by placing it in the top as well as in the bottom, as shown in *Fig.* 5. With the dimensions and reinforcement there shown, the foundation would span over a hole or soft patch 10 to 15 ft. in diameter.

Footings to Bearing Walls.

Masonry or concrete bearing walls transmit any superimposed loads plus their own weight right down to their foundations. They are thus often heavily loaded and are usually increased in width as they descend. The walls of an ordinary dwelling-house fall into this category, although in most cases the load per foot run of wall does not exceed 2 tons.

The first thing to be done in selecting a design is to take out the load per foot run of wall, by noting the number of floors and roof, their total load per square foot and their widths (usually half the span of the rooms)

taking bearing on the wall. To these loads add the weight of brickwork, breastwork, etc., above the footings.

Knowing the safe ground pressure it will then be possible to refer to *Table* 5 for the design. This table shows cross-sections of the footings required, but the depths may be increased at will. The widths given are the minima, but if made wider than shown for any particular case the depth and reinforcement must be increased in ratio to the footings shown to their immediate right. The Table also indicates the quantity of concrete and the weight of steel per foot run of wall.

As an example, suppose the wall load worked out at $2\frac{1}{2}$ tons per foot run, and the ground pressure is not to exceed 1 ton per square foot. Obviously the 2-ton footing (*e*) will give too high a ground pressure and we must take the 3-ton line, which, under the "1-ton" column, gives us footing "*h*." The minimum width is 3 ft. and depth 7 in., while the reinforcement would be $\frac{1}{2}$-in. bars hooked or turned both ends at 6-in. centres, placed across the footing, with four $\frac{3}{8}$-in. crossbars running longitudinally.

In the case of dwelling-houses it should be noted that the heaviest loads in most cases come down the internal walls, in spite of the fact that the latter are often built $4\frac{1}{2}$ in. or less in thickness. The loads should be properly estimated and the footings made wider than under external walls if the loads call for this, when the risk of unequal settlement and cracking will be minimised.

Raft Foundations for Small Buildings.

Where the load per foot run of wall becomes very high, or where the capability of the ground for sustaining loads is very low, it sometimes becomes necessary to employ the whole area of the site to support the structure.

In the case of moderate-sized and small dwelling-houses and other buildings this limit is generally reached when the permissible ground pressure falls to or below $\frac{1}{4}$ ton a sq. ft. Owing to the diversity of planning it is obviously impossible to give a general design to suit all cases, and in the event of such bad ground being employed for building purposes a proper design must be prepared based on the plan of the walls and dispositions of the loads. For warehouses or tall buildings a complicated system of beams is usually necessary to strengthen the slab and to distribute the load evenly over the site.

However, where the allowable ground pressure does not fall much below $\frac{1}{2}$ ton per sq. ft. and the distances between walls are of the order of 12 to 15 ft., the site for a dwelling-house or similar small structure may be rafted by adopting under the walls the requisite footing as given

LOAD PER FOOT RUN OF WALL TONS	ALLOWABLE GROUND PRESSURE IN TONS PER SQ. FOOT		
	2	1	½
1			
	QUANTITIES PER FOOT RUN OF WALL		
	CONCRETE CU-FT 0·75 STEEL LBS 1·42	CONCRETE CU-FT 0·75 STEEL LBS 1·42	CONCRETE CU-FT 1·0 STEEL LBS 2·06
2			
	CONCRETE 0·75 STEEL 1·81	CONCRETE 1·0 STEEL 3·03	CONCRETE 2·34 STEEL 7·9
3			
	CONCRETE 0·875 STEEL 2·63	CONCRETE 1·75 STEEL 6·7	CONCRETE 3·9 STEEL 7·1
4			
	CONCRETE 1·17 STEEL 4·95	CONCRETE 3·0 STEEL 11·7	CONCRETE 6·37 STEEL 26·5

TABLE 5.

under column " ½ ton " in *Table* 5, i.e. footings *c*, *f*, *j*, and *m*; then fill in between with a 6-in. slab reinforced with ½-in. bars at 6-in. centres in both directions in the top, as shown in *Fig.* 6. These bars should be carried right under the walls and be lapped 2 ft. there; no laps must

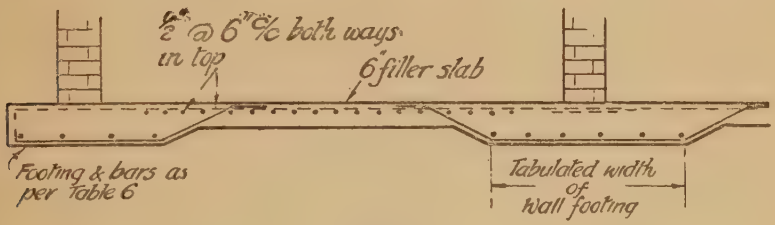

Fig. 6.

occur at the centre of the bays. The bars in the bottom of the wall footings should also be lengthened both sides to extend well into this 6-in. slab, and if the wall footing is deeper than the slab it should be sloped at 1 in 2 up to the underside of the 6-in. slab as indicated.

CHAPTER II

Columns

In designing a column the data required are, first, the maximum load it will have to carry ; and, second, its unsupported length.

Considering the load first, this must consist of all weight, both " dead " loads (i.e. the weight of the structure above together with the weight of any walls carried, and the column itself and any other permanent load), and " live " loads (i.e. the applied loads carried by floors, incidental loads, snow and wind loads on roofs, etc.).

As columns or piers support beams and lintels, one method of arriving at the load to be carried is to add together the loads from all the beams at every level or floor commencing from the top or roof. Thus the load from the roof down to the topmost floor is ascertained, and this added to the sum of the loads on that floor plus the weight of the columns themselves, gives the total load to be carried down from the topmost floor, and so on down to the foundations. This is the most precise method and requires calculations for every separate beam.

In a straightforward rectangular building with normal column arrangement, however, the simpler method described below may be adopted with this caution :—that the loads should be deliberately over-estimated by 5 per cent. or more to allow for the monolithic nature or " continuity " of concrete beams, which results in an additional loading of some columns and a relief to others, in such a manner that will not be explained here but which can be calculated and foreseen by experienced designers.

Assuming a normal arrangement of columns as shown in *Fig.* 7, the area of floor carried by column A at any floor level is $m \times n$ square feet, where m and n represent respectively in feet the centres of lines of columns in two directions at right angles. This is the area of the rectangle *opqr* which, as will be clearly seen, extends equally about column A to the centre points between the next columns in both directions. Similarly the area carried by columns $B1$ or $B2$ is $\frac{m \times n}{2}$. To $B1$ the weight of the wall n feet long must be added, and to $B2$ the weight of m feet of

wall. Although column *C* carries but half the area of floor taken by *B*1 or *B*2 plus $\frac{m+n}{2}$ feet of wall, it should not be made of less section than *B*2 owing to its corner position, which may introduce serious bending stresses.

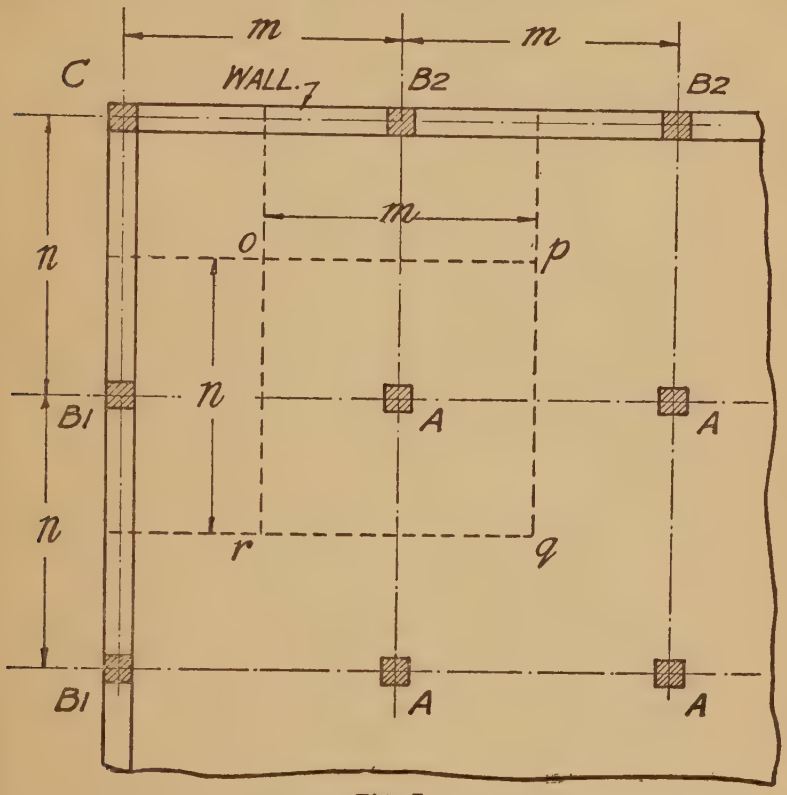

Fig. 7.

The dimension "m" may be equal to or greater than "n." Internal beams shown by dash-and-dot lines.

The weight of 1 sq. ft. of floor must now be estimated, and this is the sum of the

Deadweight of slab, including any finishes.
" " ceiling below (if any).
" " ribs of beams.*
" " column.*

* Instead of reducing these to lbs. per sq. foot, these loads may, of course, be added as a lump item after the distributed loads have been computed.

Superimposed or live load on floor.

Add 5 per cent. for contingencies.

Designating the total distributed load per square foot as *wf*, and the weight of wall between each floor as *wl* lbs. per ft. run, then the column loads may be summarised as follows :—

Col. *A*. 1·1 ($m \times n \times wf$) lbs. for each level or lift.

„ *B*1. 0·5 ($m \times n \times wf$) + $n \times wl$ lbs. for each level or lift.

„ *B*2. 0·5 ($m \times n \times wf$) + $m \times wl$ lbs. for each level or lift.

„ *C*. As for Col. *B*2.

The next factor to be ascertained is the unsupported length (*L*) of any lift, i.e. between any floors. This may be measured from the underside of beams, neglecting haunches, down to the top of the floor, i.e. the top of the beams below. It is essential that at the ends of this measured length the column be braced in both directions, or, in other words, there must be beams running into it in two directions at right angles, as shown on the plan in *Fig.* 7.

Having converted the loads to tons, we can now refer to *Table* 6.

Further notes and qualifications regarding the columns in *Table* 6 are as follows : They have been designed to carry the loads tabulated in column 1, when cast with 1 : 2 : 4 concrete (maximum concrete stress, 600 lbs. per sq. in.). Their cross sections, showing the links or binding, are indicated in col. 6.

The sections tabulated are intended for interior or inner supports only, and 1 in. cover of concrete to the main bars has been allowed. For exterior columns (exposed to weather) the cover should be increased to 1½ in. by adding 1 in. to the side of column required. For end or outside columns (such as those at the sides of a building), the allowable safe load should be taken as only one-half that tabulated in col. 1. Bending stresses due to eccentricity of load or to beams or braces monolithic with the columns have not been considered, but they should be determined and the section emended if necessary.

The links are to be placed at half the tabulated centres given in col. 4 for a distance of one-sixth the height or length *L* of the column at the upper and lower ends.

The vertical bars must only be lapped at floor or brace levels, and must be given a minimum lap of 24 diameters of the bars concerned. The lap, if longer than *L*/6, must be bound with links at half the tabulated centres. Also, below the lap or splice the lower four or eight bars should be bent inwards just to clear the upper bars at a very small angle to the vertical, i.e. the length of the bent portion should be at least 18 in. for small bars and for small deviations, and increased proportionately for larger bars.

The length L may be taken between the tops and soffits of beams or braces, neglecting the depth of haunches or brackets. It is essential that the column be adequately fixed in position and direction at the levels between which the length is taken.

$c = 600$; $m = 15$; *cover*, 1 *in.*

Max. Load in Tons.	Size of Column Ins.	Reinforcement. Vertical No. of bars and diam. in in.	Reinforcement. Horizontal Diam. and Pitch in in.	Max. Length L feet.	Typical Section.
1	2	3	4	5	6
14	8×8	4—$\frac{5}{8}$	$\frac{1}{4}$ at 4 *s*	12	
17	9×9	4—$\frac{5}{8}$	$\frac{1}{4}$ at 4 *s*	13	
21	10×10	4—$\frac{5}{8}$	$\frac{1}{4}$ at 4 *s*	15	
28	11×11	4—$\frac{3}{4}$	$\frac{1}{4}$ at 5 *s*	16	
33	12×12	4—$\frac{3}{4}$	$\frac{1}{4}$ at 5 *s*	18	
38	13×13	4—$\frac{3}{4}$	$\frac{1}{4}$ at 5 *s*	19	
47	14×14	4—$\frac{7}{8}$	$\frac{1}{4}$ at 6 *s*	20	
56	15×15	4—1	$\frac{1}{4}$ at 6 *s*	22	
64	16×16	4—1	$\frac{1}{4}$ at 6 *s*	24	
73	17×17	8—$\frac{3}{4}$	$\frac{1}{4}$ at 8 *d*	25	
81	18×18	8—$\frac{3}{4}$	$\frac{1}{4}$ at 8 *d*	27	
104	20×20	8—$\frac{7}{8}$	$\frac{1}{4}$ at 8 *d*	30	

s = *single links.* *d* = *double links.*

TABLE 6.

From this Table it will be seen that if the load on column A were 45 tons and its length 15 ft., the required section would be 14 in. × 14 in., with four $\frac{7}{8}$-in. bars and $\frac{1}{4}$-in. links at 6-in. centres. Had the length been

22 ft., the 15 in. × 15 in. section and equivalent reinforcement would have been necessary.

Quantities.

The weight of reinforcement, volume of concrete, and area of shuttering per foot of height of column are given in *Table 7*. It must be remembered that when estimating the steel due allowance must be made for the bars to pass up into the column above by at least 24 diameters,

or for $\frac{5}{8}$ in. bars, say 18 in.
$\frac{3}{4}$ „ „ „ 18 „
$\frac{7}{8}$ „ „ „ 24 „
1 „ „ „ 24 „

TABLE 7.

NET QUANTITIES PER FOOT OF HEIGHT.

Size of Column.	Reinforcement.		Concrete.	Shuttering.
ins.	Vertical or Longitudinal Bars. lbs.	Horizontal Bars or Links. lbs.	cu. ft.	sq. ft.
8 × 8	4·2	1·35	0·45	2·7
9 × 9	4·2	1·5	0·56	3·0
10 × 10	4·2	1·7	0·70	3·3
11 × 11	6·0	1·5	0·84	3·7
12 × 12	6·0	1·6	1·00	4·0
13 × 13	6·0	1·75	1·17	4·3
14 × 14	8·2	1·55	1·36	4·7
15 × 15	10·7	1·7	1·56	5·0
16 × 16	10·7	1·8	1·78	5·3
17 × 17	12·0	2·0	2·00	5·7
18 × 18	12·0	2·2	2·25	6·0
20 × 20	16·4	2·4	2·78	6·7

Formwork.

A typical mould for a column is shown in *Fig.* 8. It consists essentially of two sides, built up of $1\frac{1}{4}$-in. wrought boards on end, of width equal to that of the required column and two sides similarly built but wider by twice the thickness of the boards used. These are securely held in position by 3-in. × 4-in. yokes and $\frac{5}{8}$-in. bolts at intervals of 2 ft. near the top of the column reducing to 1 ft. near the bottom of a 12-ft. column, complete with wedges, as shown in *Fig.* 8, an illustration taken by permission from "Design and Construction of Formwork for Concrete Structures," by A. E. Wynn.

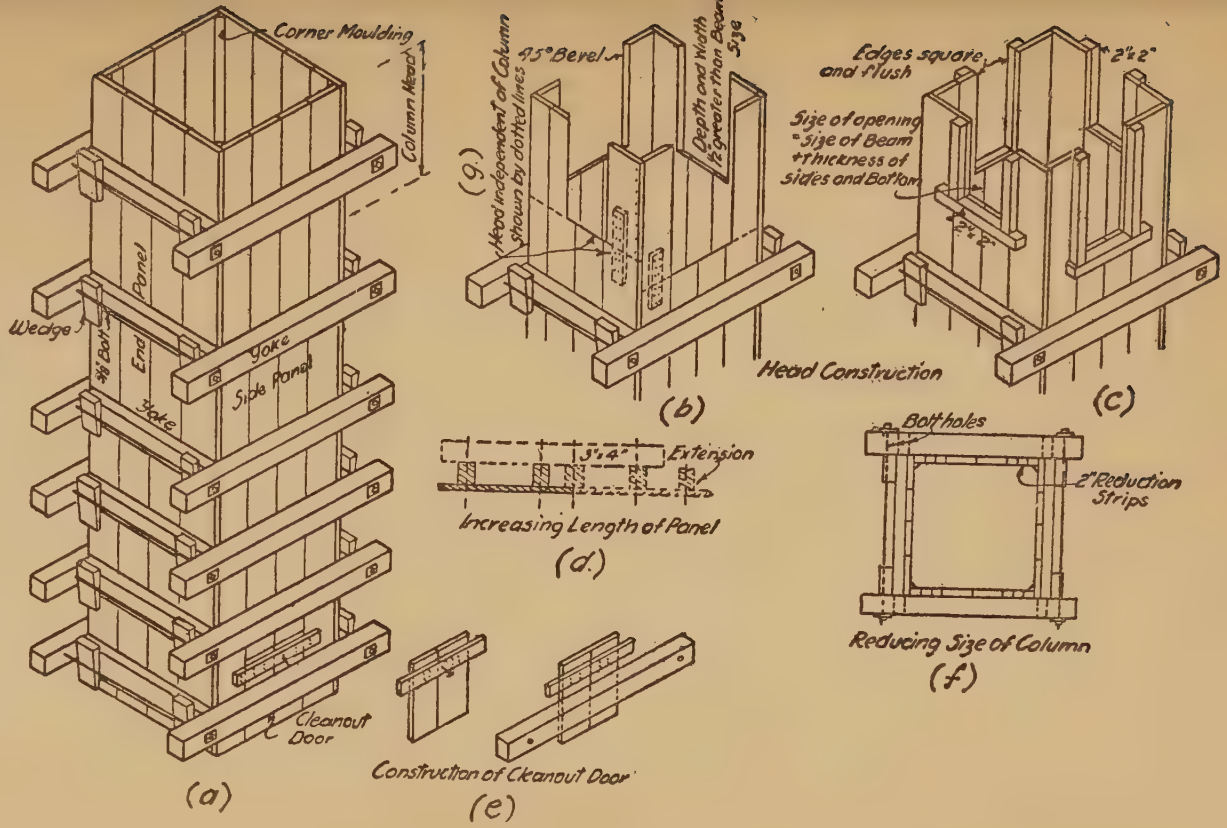
Corner Moulding
Column Mould
Panel
Wedge
End
Yoke
Side Panel
Yoke
Cleanout Door
(a)
Head independent of Column shown by dotted lines
45° Bevel
Depth and Width ½ greater than Beam Size
(g)
(b)
Edges square and flush
2"x2"
Size of opening = Size of Beam + thickness of sides and Bottom
2"x2"
Head Construction
(c)
3'-4"
Extension
Increasing Length of Panel
(d)
Bolt holes
2" Reduction Strips
Reducing Size of Column
(f)
Construction of Cleanout Door
(e)

Fig. 8.

A door must be provided at the bottom so that any shavings, dirt, etc., can be washed out before concreting. The head or top of the mould must be cut to allow for the beams running into the column at the top. Fillets 1 in. by 1 in. should be run down the corners, unless a square corner is desired, as, for instance, on an external face.

It is very desirable to use good and stout timber for column formwork because it must be rigid under very hard ramming; the slightest bulge or irregularity is very conspicuous in columns. For the same reason the forms must be firmly braced laterally to retain their plumb alignment.

Some specifications do not allow the four sides to be erected simultaneously, but require that the fourth shall be carried up in about 12-in. lengths by nailing on or adding short boards as concreting and ramming proceed in 6-in. stages. This, of course, admits of better inspection and control, but complicates the design of the shuttering.

Erection of Forms—Reinforcement—Concreting.

If not too high or too heavy, the assembled box can be erected and the reinforcement wired up into a unit and inserted through the top. It is necessary, however, to have the bottom 2 or 3 ft. of two sides removable between yokes so that the upper reinforcement can be wired to the lower at floor levels. These removable pieces can be avoided, of course, if the reinforcement is erected and wired first, and the box is lowered over it.

An alternative, and the more usual, way is to erect three sides first, then place and fix the reinforcement, and finally put up the fourth side.

Before any concrete is poured a thorough inspection should be made to see that the forms are perfectly clean and free from dirt, sawdust, etc., and to see that no shavings, small blocks of wood, etc., are lying about in such a position that they might be swept into the mould. The surface of the previously-set concrete should be coated with thick grout after washing and brushing, and then concrete poured into the mould in about 6-in. layers. Each layer must be thoroughly tamped with a long, narrow, grafting tool or spade, to work the concrete well around the bars and to produce a dense concrete throughout, a very important point in column erection.

Concreting must be stopped just below the soffits of beams or below haunches, and left to set before the top or head is concreted with the beams and slab.

Stripping may be undertaken when 6 days have elapsed after casting with ordinary Portland cement, or 3 days if rapid-hardening cement is used.

CHAPTER III

Beams

Single or One-Span Beams.

THE beams for which the designs are given are intended for use with the floor and roof slabs described in Chapter V. It must be understood that the slab actually forms an essential portion of these beams. The rib below the slab is part of the beam and generally carries the tensional reinforcement in the bottom, whereas the slab carries the compressive stresses, which are developed sometimes as far as half-way between the ribs. It is necessary therefore that the slab shall be continuous throughout the length of the beam for half the breadth of the slab (see *Table* 9), equally both sides of the beams, unless special designs are prepared involving much greater percentages and different dispositions of steel. Large openings, or openings in the slab near or against the rib, will therefore require particular consideration, too complex to be dealt with here.

Determination of Dimensions, etc.

Assuming a floor or roof to carry 112 lbs. or 56 lbs. per sq. ft., the necessary single-span beams spanning, say, from wall to wall, column to wall, or column to column, may be ascertained from the following.

First find the total load per foot run on the beam. This will consist of the live load, the dead weight of the slab, and the dead weight of the rib of the beam. Assuming that the distance between the centres of the beams selected is C (this, of course, is the span of the slab), the load in lbs. per ft. run of beam then equals :

112 (or 56 for a roof) $\times$ C (in feet) plus depth of slab in ins. $\times$ 12 $\times$ C (in feet) plus depth $\times$ breadth of rib.

Let this total load equal w, then from *Table* 8 the number of the standard beams required can be selected for any span between 4 ft. and 24 ft. By further reference to *Table* 9 and *Fig.* 9 the design and full particulars of the selected beam can be ascertained ; it should be confirmed that the depth of the slab previously chosen is at least the same

SAFE UNIFORMLY DISTRIBUTED LOAD (INCLUDING WT. OF SLAB & RIB) IN LBS: PER FOOT RUN OF SINGLE SPAN BEAMS

SPANS IN FEET BETWEEN CENTRES OF BEARINGS.

BEAM NUMBER	4	6	8	10	12	14	16	18	20	22	24	BEAM NUMBER
B1	1800	1200	900	470								B1
B2	2000	1330	1000	650	450							B2
B3	2500	1650	1250	910	630		BEAMS ARE TOO SHALLOW FOR					B3
B4	4200	2800	1600	1030	710	520	SPANS TO RIGHT OF FIRM					B4
B5	5000	3330	2160	1390	960	710	540		LINE			B5
B6		3650	2750	1800	1250	920	700	560				B6
B7		4000	3000	1970	1380	1000	760	610	490			B7
B8			3120	2500	1760	1280	980	780	630			B8
B9			3250	2600	2000	1480	1120	890	720	600		B9
B10				2700	2100	1520	1170	930	750	620	520	B10
B11				2800	2350	2000	1700	1330	1080	890	750	B11

TABLE 8.

or greater than that specified under (S), *Table* 9, the minimum slab depth for the beam selected. Finally the quantities can be prepared by reference to *Table* 10.

Example.—Suppose it is desired to support a floor to carry 112 lbs. per sq. ft. live load on beams at 5-ft. intervals. Referring to the continuous-slab tables in Chapter V it is found that a 4-in. slab is required. Next compute the total load per ft. run on the beam as follows:

	lbs.
On account of live load	112 × 5 = 560
,, ,, slab load	48 × 5 = 240
,, ,, rib of beam, say . . .	12 × 6 = 72
	Total 872

Assuming the span of the beam is to be 11 ft., by reference to *Table* 8 and reading under the 12-ft. span column (which will include 11 ft.) it is found that Standard Beam B 5 is required (this will carry up to 960 lbs. per ft. run).

By reference to *Table* 9 the following details are found for Beam No. B 5: Depth of beam, 12 in.; width, 6 in.; top steel, two $\frac{3}{8}$-in. bars; bottom steel, two $\frac{3}{4}$-in. and two $\frac{5}{8}$-in. bars. Note that the minimum slab thickness required by this beam is 4 in., which is the depth chosen above and therefore covers the case. Also the actual weight of the rib is only 48 lbs. against the assumption of 72 lbs., and is therefore on the right side. The minimum breadth of slab is 24 in., while that provided is actually 60 in. = 5 ft.

Examining these Tables more fully it will be noticed that the span of the beam (S) is measured between the centres of the bearings. The depth (D) is the overall depth in inches, that is, from the top of the slab to the underside of the rib. The breadth of the rib is (*b*) and the least width of slab is B. Any of these sizes, including the depth of the slab, may be increased as desired above the minimum values given in *Table* 9.

A typical section, elevation, and plan of the beams are given in *Fig.* 9. The top layer of bottom bars is to be cranked, as shown, at 45 degrees at both ends. The pitch of the stirrup given in *Table* 9 is the minimum pitch for the stirrups between the end of the beam and the lower point of the crank. Inwards from here the spacing may be gradually and uniformly increased to 3 in. less than the total depth of the beam at the middle of the beams. The main slab bars will pass over the top bars of the beam, which will touch them and be wired to them at their crossings.



DESCRIPTION OF BEAMS

MAX: STRESS IN CONCRETE C = 600 lbs. SQ. IN.
STEEL t = 16,000 " " "
m = 15

BEAM NUMBER	OVERALL DEPTH IN INCHES D	MINIMUM BREADTH OF RIB IN INCHES b	MINIMUM THICKNESS OF SLAB IN INCHES S	MINIMUM BREADTH OF SLAB IN INCHES B	TOP STEEL	BOTTOM STEEL		STIRRUPS DIA: OF BAR & PITCH IN INCHES	WT OF RIB PER FOOT RUN IN LBS	BEAM NUMBER
						BOTTOM LAYER	TOP LAYER			
B 1	8	5	3	18	2 - 3/8	2 - 1/2	2 - 1/2	1/4 @ 3	25	B 1
B 2	9	5	3	21	2 - 3/8	2 - 5/8	2 - 1/2	1/4 @ 3	30	B 2
B 3	10	6	3 1/2	24	2 - 3/8	2 - 5/8	2 - 5/8	1/4 @ 3	39	B 3
B 4	11	6	4	24	2 - 3/8	2 - 5/8	2 - 5/8	5/16 @ 3	42	B 4
B 5	12	6	4	24	2 - 3/8	2 - 3/4	2 - 5/8	5/16 @ 3	48	B 5
B 6	13	6	4	24	2 - 1/2	2 - 3/4	2 - 3/4	5/16 @ 3	54	B 6
B 7	14	6	4 1/2	24	2 - 1/2	2 - 3/4	2 - 3/4	5/16 @ 3	57	B 7
B 8	15	6	5	27	2 - 1/2	2 - 7/8	2 - 3/4	5/16 @ 3	60	B 8
B 9	16	7	5 1/2	30	2 - 1/2	3 - 3/4	2 - 3/4	5/16 @ 3	74	B 9
B 10	17	7	5 1/2	30	2 - 5/8	3 - 3/4	2 - 3/4	5/16 @ 3	80	B 10
B 11	18	8	6	30	2 - 5/8	3 - 7/8	2 - 7/8	5/16 @ 3	96	B 11

TABLE 9.

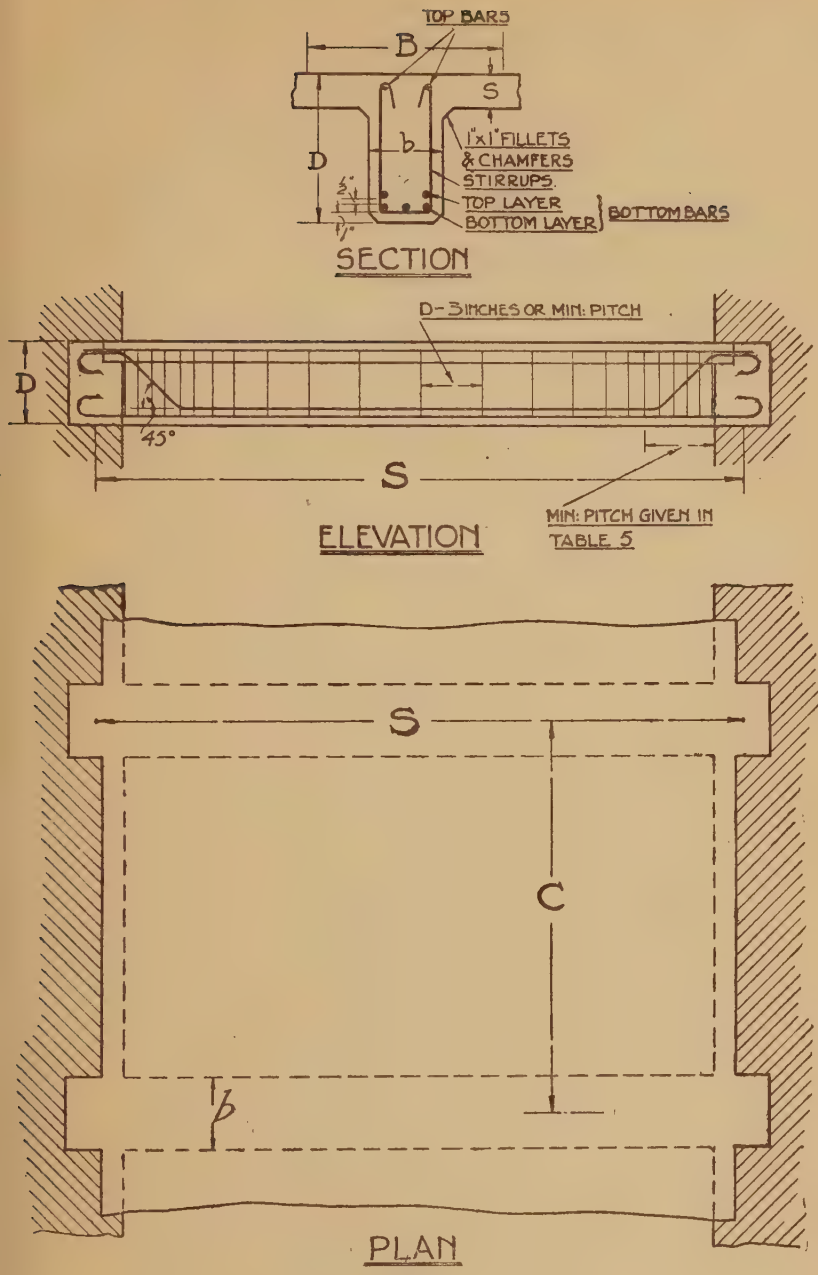
TOP BARS
B
S
D
b
1"x1" FILLETS
& CHAMFERS
STIRRUPS.
TOP LAYER
BOTTOM LAYER
BOTTOM BARS
SECTION
D-3 INCHES OR MIN: PITCH
D
45°
S
MIN: PITCH GIVEN IN
TABLE 5
ELEVATION
S
C
b
PLAN

Fig. 9.

Wall Bearings.

Suitable pads or bearings must be provided to the ends of beams resting on walls so that the allowable pressure of 5 tons per sq. ft. for brick walls in cement mortar and 3 tons per sq. ft. for brick walls in lime mortar is not exceeded. The beam should run into the wall a distance (M) as under:

At least	9	in.	for spans up to	12	ft.
,,	13½	,,	,,	18	,,
,,	18	,,	,,	24	,,

The simplest type of pad is shown in *Fig.* 10 and is cast monolithic

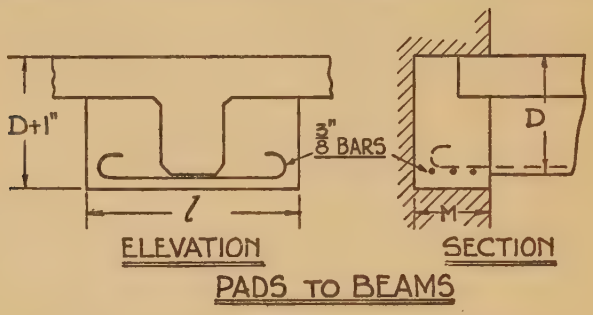

Fig. 10.

with the beam. Its depth is 1 in. greater than that of the beam, and it must be made as long as required so that the above-mentioned bearing pressures are nowhere exceeded; indeed it is good practice to err on the large side when calculating bearing areas. The length generally works out to between 1 and 3 ft. and the pads must be reinforced longitudinally by one ⅜-in. bar per 4 in. (or part of 4 in.) of width. Thus a 10-ft. span beam would have a 9-in. bearing with three ⅜-in. bars. These bars are placed below the bottom bars of the beam and wired across them, and must be hooked at their ends.

Notes on Construction.

It is important that 1-in. by 1-in. fillets be provided between the rib and the underside of the slab, and it is usually desirable to chamfer the arrises to the soffit for ease of stripping the formwork and preserving the corners.

The reinforcement may be assembled into a frame before putting it into the mould, but in any case the bars and stirrups and also slab bars must be accurately placed and securely wired before any concreting

is undertaken. The external cover of concrete to the main bars is to be 1 in. and the vertical clearance between the two lower layers ½ in. Small pre-cast blocks of cement mortar 1 in. high may be used as stools cast to obtain the outer cover of concrete. Interior spacing of bars may be secured by short pieces of 1-in. bars left in the work.

When concreting, the rib should be filled first in 6-in. layers well rammed and rodded and the slab poured immediately afterwards. If for any reason the slab cannot be put on at the same pouring, then it must follow as soon as possible and any loose material must be brushed from the top of the rib concrete and the latter washed over with neat cement grout. Also the day's work must be carefully schemed so that the whole floor is cast at one pouring, or so that the joints at the end of any shift occur at the centre of the span both for beams and slabs. In no case must joints occur near supports or concentrated loads. The joints must be vertical, and a board, cut to allow bars to pass, fixed temporarily in the moulds against which the concrete can be rammed. As before, when recommencing this joint must be cleaned and well covered with cement grout.

Length of Bars.

The total length of a beam is the span plus the width of one bearing. The following bars per beam are required:

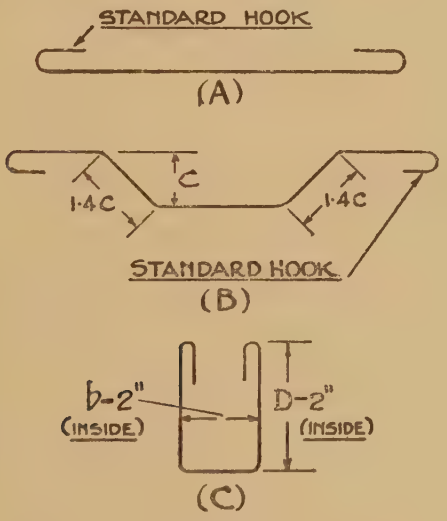

Fig. 11.

In Bottom.—Two (or three) bars (*Fig.* 11, A) the length of each, measured over the hooks, being 2 in. less than the total length of the beam. The total length of bar cannot be given as the extra length required for the standard hooks varies with the diameter of the bar employed. These standard hooks and the necessary extra lengths are tabulated in the General Specification (Chapter XI).

Also two bars (*Fig.* 11, B) : the distance (*c*) between the centre lines of the upper and lower straight portions is equal to the total depth of the beam less twice the diameter of the bar less $2\frac{1}{2}$ in. The length of the central straight portion is equal to the clear span less twice the distance (*c*) between the centre lines of the upper and lower straight portions.

The length, measured over the hooks, is equal to 2 in. less than the sum of the length of the straight central portion plus 2·8 times the distance from centre to centre of the upper and lower straight portions plus twice the width of one bearing.

In Top.—Two bars each of a length equal to the span plus 2 in.

Stirrups.—Number as required. The total length of each stirrup (*Fig.* 11, C) equals twice the total depth of the beam plus the width of the rib plus 2 in.

Formwork.

The moulds for the beams are usually made in conjunction with those for the slab. The whole must be true to line and sufficiently braced and strutted to be rigid, and free from appreciable deflection when carrying the dead load of the wet concrete which is to be placed upon it ; it must also be free from vibration when men and barrows pass over.

The soffits of the beams must be strutted by vertical supports resting on folding-wedges upon a sole-plate sufficiently large to avoid settlement during construction. When striking, these wedges are knocked out slowly so that the support is gently lowered.

The sides of the beams and the soffit of the slabs may be removed before the beam soffits, but in doing so great care must be taken that the beam soffit is not disturbed. For further essential information refer to the General Specification (Chapter XI).

A typical arrangement for beam formwork is shown in *Fig.* 12, where the wedges support 4-in. by 4-in. posts provided with a cross-head formed of the same size timber and stiffened with 1-in. by 4-in. braces. These cross-heads in turn support 2-in. planks forming the beam soffits. The beam sides are built up of 1-in. to $1\frac{1}{2}$-in. plank stiffened with battens at 24-in. centres. A 1-in. by 4-in. ledger nailed to

these battens carries 2-in. by 6-in. joists which support 1-in. boards for the slab.

Before concreting, the formwork must be thoroughly examined, particularly the props and wedges; all dirt, shavings, etc., must be cleared away, existing concrete joints cleaned, and inner surfaces of the formwork treated as described in the General Specification (Chapter X).

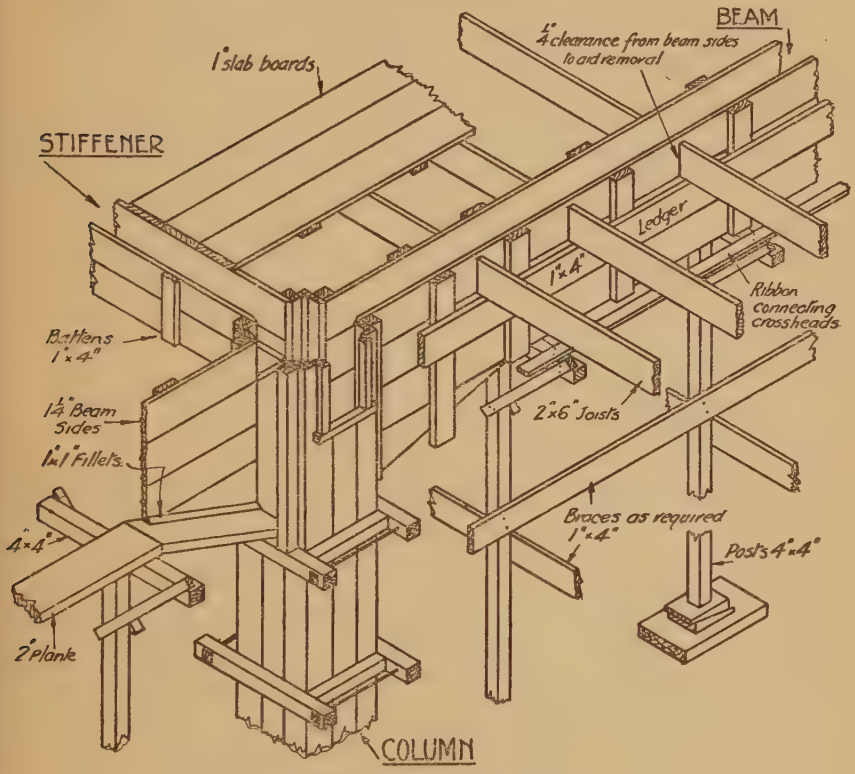

Fig. 12.—Typical Detail of Formwork.

Striking of Formwork.

As mentioned in the General Specification (Chapter XI) the period for which the formwork must remain in position undisturbed varies with the weather and the class of cement used. In any case, using ordinary Portland cement the soffits of beams should be left in position for 21 days; if it is intended to strut an upper floor, using the one below

as a support, the props must be carefully replaced under the soffit when the boards are removed and the new props to support the upper floor should occur over the replaced props below.

Materials.

It will be observed from *Table* 9 that the stresses adopted in the design are 600 lbs. per sq. in. in the concrete and 16,000 lbs. per sq. in. in the steel, both of which stresses call for first-class materials. The concrete mix is 1 part cement, 2 parts sand, and 4 parts aggregate.

TABLE 10.

Quantities per Foot Run of Beam.

Beam Number.	Concrete in rib (full depth taken) in cubic ft.	Steel. Approximate Average weight in lbs. (Stirrups included).
B 1	0·28	5·0
B 2	0·31	6·0
B 3	0·42	7·0
B 4	0·46	8·0
B 5	0·50	9·2
B 6	0·54	11·0
B 7	0·58	11·2
B 8	0·63	12·5
B 9	0·78	13·5
B 10	0·83	14·5
B 11	1·00	17·5

Notes.—The concrete to be added to complete the floor will be the volume of the slab between the ribs.

It is impossible to give definite figures for the weight of steel per foot run because this will vary with every different span of the same size beam. The figures given above are therefore average and will usually cover ordinary cases. To obtain exact figures, draw out the beam, measure off the bars and stirrups, and multiply by the weights of bar per foot run.

CONTINUOUS BEAMS.

When beams run over two or more spans and are continuous at their ends (i.e. over their support) the internal bending stresses are much modified from those obtaining in simple or one-span beams. For instance, in the latter case there is no bending moment at the ends of beams, but in continuous beams the end moment may be double that at the centre of the beam. This is why additional steel and also a haunch are usually allowed at the supports or bearings.

On the other hand, the monolithic connection between two or more

continuous beams enables the reduction of the size of a beam and the steel at its centre. The evaluation and variation of the moments are technical problems which need not be considered here. For ordinary distributed light loads as have been considered previously, viz. 112 and 56 lbs. per sq. ft., the following rules may be applied, providing adjacent beams are of approximately the same spans.

(1) The particulars of the slab remain as before.

(2) Evaluate the total load per foot run on the beam as before, but before reading off the beam required from *Table* 8 reduce this total load by one-quarter. Thus if the actual total load per foot is 2000 lbs., a simple or one-span beam spanning 12 ft. would require Section B 9. For a continuous beam, however, the equivalent load is $2000 \times \frac{3}{4} =$ 1500 lbs. per foot run. Reference to *Table* 8 shows that Section B 8 may be employed as specified in *Table* 9.

(3) The width of the rib of the beam should be made 1 in. greater to allow the haunch bars described below to pass freely between the horizontal reinforcement.

(4) A haunch or splay must be added to the beam ends that are continuous, as shown in *Fig.* 13. The length of the haunch (*h*) should equal one-quarter of the span (*s*) and is measured from the centre of the column. The extra depth (*e*) is to be one-half of the overall depth of beam (D).

(5) The ordinary reinforcement to the beam, viz. bars *a*, *b* and *c*, as found from *Table* 9, should have an overall length of 2 or 3 in. less than the span, so that they do not foul those from the adjacent beam at the supports.

It should be noted that bars *b* are cranked up at an angle of 30 degrees at the internal supports instead of 45 degrees as at the external support. The inclined length of this 30-degree crank is twice the amount of vertical crank in the bars. Bars *a* and *b* may be gently bent inwards (but not kinked) near the supports to allow bars *f* to pass them on the outside.

It is now necessary to add bars *d* and *f*, equally disposed on each side of the centre line of the support. Each set of bars *d* and *f* will equal in area the combined areas of bars *a* and *b*, thus

row *dt* and row *fb* will each = row *a* in number and diameter.

row *db* and row *ft* will each = row *b* in number and diameter.

The lengths of each row are indicated in *Fig.* 13, and it will be noticed that bars *d* have to be provided with hooks at their extremities.

(6) The centres and arrangement of the stirrups will remain as indicated in *Table* 9, but at the haunches they must be deepened so as to pass under bars *f* and over bars *d*.

(7) The support may consist of a reinforced concrete column, brick

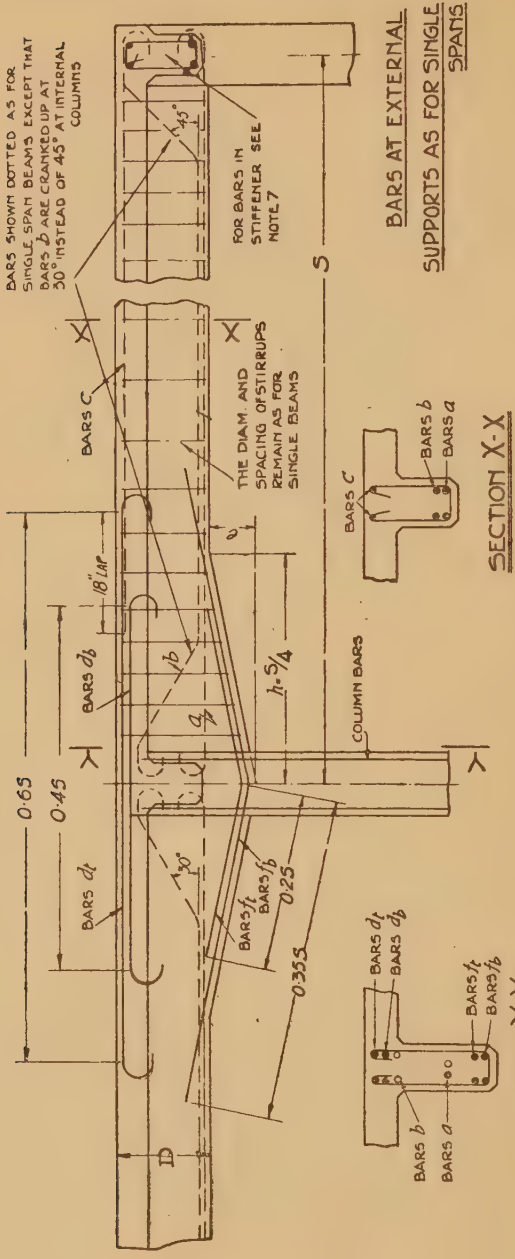

Fig. 13.—Detail of Continuous Beam at Internal Supports.

wall, etc. When columns provide the support the column bars must pass well up into the slab. Also, as the column heads will be held only in the direction of the continuous beams entering, it is very desirable to connect the heads in the other direction by a beam at right angles to the continuous beam. This beam, or stiffener, should be in depth about one-and-a-half times the length of the side of the column and 5 or 6 in. wide. For small slab spans under 6 ft., two $\frac{5}{8}$-in. bars should be placed both in the top and in the bottom of the beam or stiffener. For slab spans over 6 ft., two $\frac{3}{4}$-in. bars should be used. The top bars must run 18 in. past the centre line of the columns; they must be in one piece and hooked at both ends. The bottom bars may lap 12 or 18 in. at the column. Stirrups, $\frac{1}{4}$-in. diameter, must be provided at a maximum distance apart of half the depth of the stiffener.

(8) When adjacent spans are not of exactly the same length the dimensions should be determined for the greatest span and the same section run through all spans. This also applies to the haunches, which should be worked out for the greatest spans; the straight centre portion of the shorter beams will therefore be less than half the length of the beam.

As there are so many variable quantities it is obviously impossible to tabulate a list of quantities. The best way to determine these is to draw out the beams to scale and measure off the lengths. This may be done approximately for estimating, but for actual construction all such details should be drawn out accurately to determine precise lengths and to show the arrangement of the bars.

The formwork for continuous beams and stiffeners is illustrated in *Fig.* 12.

WALL AND EXTERNAL BEAMS.

So far in connection with beams only those with slabs on both sides of the ribs have been considered. In the case of external beams, wall beams, or beams framing an opening, the slab is absent on one side of the rib, so that a serious modification to the design must be made. By wall beams we refer to those external beams of a building which, in addition to the slab load, also carry the weight of the wall between the columns or piers. Where wall loads only are carried over small openings between floor levels, lintels as described in Chapter IV may be used.

A typical section through a wall beam or external beam is shown in *Fig.* 14. To determine the dimensions the total load must be computed and reference then made to *Tables* 8 and 9 and *Figs.* 9 and 13 as before.

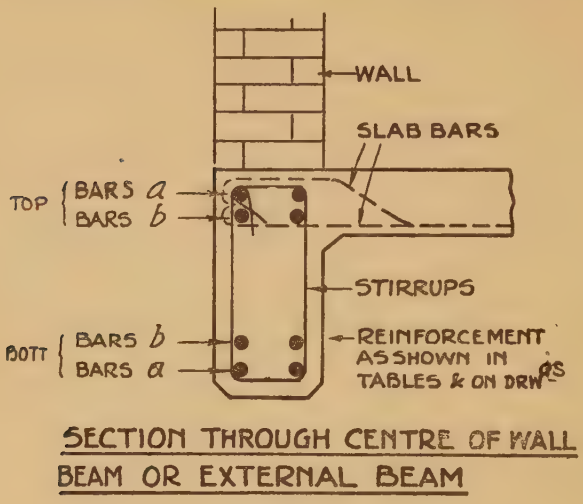

Fig. 14.

Whether a single-span or continuous-span beam, the load per foot run will consist of:

lbs.

The weight of the rib per foot run: = total depth of beam in inches multiplied by breadth of rib in inches =
The weight of the slab: = thickness of slab in inches multiplied by half its span in feet multiplied by 12 =
The weight of the live load on the slab: = 112 (or 56) multiplied by half the span of the slab in feet =
The weight of the wall above the beam: = the height of the wall in feet multiplied by its thickness in feet multiplied by 150 (for a concrete wall) or by 112 (for a brick wall) =

Total

Single-Span Beams.

Having found *w*, the load per foot run of beam, increase this load by 50 per cent. (i.e. multiply by 1½) and from *Table* 8, using this increased load and the span desired, read off the beam number required. Thus if *w* works out to 600 lbs., increasing by 50 per cent. makes 900 lbs. If the span is 18 ft., then beam No. B10 will be required. The section,

however, particularly the reinforcement, is increased from that given in *Table* 9 and is described below.

Continuous-Span Beams.

Having found w as above, before reading off the beam number from *Table* 8 increase w by 12½ per cent. (i.e. multiply by 1⅛). Thus for a continuous beam of $w = 600$ lbs. the increased figure equals 675, which over a span of 18 ft. calls for No. B8 modified as below.

Modification to Sections of Beams.

The modifications to the sections given in *Table* 9 and *Figs.* 9 and 13, to enable them to be employed with the slab running into the rib on one side only, consist in the following additions to the details described and shown in the above-mentioned Table and Figs.

(1) It is good practice to make the beam as wide as the wall it carries, so that wall beams will usually be 9 in., 11 in., etc., thick; that is, an increase from the b shown in *Table* 2.

(2) The reinforcement in the top of the beam must be increased from two ⅜-in. or two ½-in. or two ⅝-in. bars to equal those in the bottom of the beam. Thus, taking Section B8 (*Table* 8), the two ½-in. bars in the top of an internal beam will be replaced by two ⅞-in. and two ¾-in. bars in the top (the ⅞-in. bars, or bottom layer of bottom bars, becoming the upper layer of the top bars), and the section will accordingly be as *Fig.* 14.

The length of the top bars will be the same as shown in *Figs.* 9 and 13. It will be noticed that the stirrups are taken round the top bars to form a complete loop, otherwise the reinforcement remains as shown in the Tables or the drawings. Continuous beams will, of course, be provided with the haunches and reinforcement previously described, but no further modification is necessary except that the thickness of the beam (9 in. or 11 in., etc.) will be carried through the haunch.

CHAPTER IV

Lintels

THE lintels given in *Table* 11 have been designed for use in brick buildings, such as houses, hospitals, factories, etc., and for spanning over small openings in their walls.

Only the weight of the wall above the lintel has been taken into consideration, so that floor loads or concentrated loads from beams running into the wall over the lintel are not considered here. The latter conditions would require special treatment dependent on the circumstances of each individual case.

Again, the lintels in the lower stories of tall brick or stone buildings may require special investigation if the walls are heavily loaded, particularly if locally heavily loaded owing to the presence of numerous openings in the walls. Generally speaking, however, the lintels described will serve for the usual cases where the height of wall above the lintel is about equal to or more than the clear span.

The weight of wall used in the calculations is that of the equilateral triangle of side equal to clear span.

From *Table* 11 and *Fig.* 15 it will be noted that complete details for estimating and construction are given for clear spans (S) of from 3 to 9 ft. for walls $4\frac{1}{2}$ in. and 9 in. thick. Eleven-inch hollow walls may be taken as 9 in. For greater thicknesses of wall add units of $4\frac{1}{2}$ in. and 9 in. together (concrete and steel) until the lintel is as thick as the wall.

The concrete must be 1 : 2 : 4 mix, and the reinforcement mild steel bars to B.S.S. or equal. It is also assumed that the brickwork under bearings is capable of carrying safely 5 tons per sq. ft.

When cast *in situ* the soffit should not be struck until 14 days have elapsed assuming normal conditions and the use of ordinary Portland cement. They must not be loaded, of course, until 4 or 6 weeks after casting. If cast before hoisting into position a similar or longer period should elapse, and it is important to mark the top plainly with the word "TOP," to ensure that it is not hoisted or laid upside down and worthless from the point of view of strength. If rapid-hardening Portland

TABLE II.

This Table is for 1 : 2 : 4 concrete and mild steel bar to B.S.S. One inch cover of concrete to steel. Maximum compression 600 lbs. per sq. in. Maximum tension, 16,000 lbs. per sq. in.

Clear Span not exceeding	Minimum Bearing.	Overall Depth of Lintel.	Thickness of Wall carried and of lintel.	Reinforcement. No. and Diam. in inches.		Quantities per ft. run excluding top bars and binding.	
				Hooked only.	Hooked and Cranked.	Concrete cu. ft.	Steel. lbs.
feet.	in.	in.	in.				
S	*B*	*d*	*t*				
3	4½	4½	4½	2—⅜	1—⅜	0·14	1·45
			9	2—⅜	1—⅜	0·28	
4	6	4½	4½	2—⅜	1—⅜	0·14	1·4
			9	2—⅜	1—⅜	0·28	
5	6	5	4½	2—⅜	1—⅜	0·16	1·35
			9	2—⅜	1—⅜	0·32	
6	9	6	4½	2—⅜	1—⅜	0·19	1·3
			9	2—⅜	2—⅜	0·38	1·75
7	9	7	4½	2—⅜	1—⅜	0·22	1·3
			9	2—⅜	2—⅜	0·44	1·7
8	9	8	4½	2—⅜	1—⅜	0·25	1·25
			9	2—⅜	2—⅜	0·50	1·7
9	12	9	4½	2—⅜	1—⅜	0·28	1·25
			9	2—7/16	2—7/16	0·56	2·25



Fig. 15.

cement is used these periods may be reduced as follows: Striking soffit of *in situ* lintels, 4 days; loading *in situ* lintels, 7 days; stripping pre-cast lintels, 2 days; hoisting pre-cast lintels, 8 days.

It is desirable in lintels of more than 5 ft. span to place two ⅜-in. bars in the top around which the ¼-in. binding at 12-in. centres can be taken. In the best practice steel is always inserted in the top together with binding, even for the smaller spans, as this assists, amongst other things, to support the lower bars during concreting.

The cover of concrete to bars is to be 1 in. The outermost length of the bars will be the length of the clear span plus the bearing at each end less 2 in.; and they must be provided with standard hooks, 5 in. round the bend in this case. The cranked bars are to be bent down at 45 deg. from a point just over the edge of support or opening. Binding, as already mentioned, is always desirable, and must be used for spans over 6 ft.

The actual length of bottom bars required will therefore be approximately the length of the clear span plus the width of the two bearings plus 6 in. The cranked bars will require a further addition of about three-quarters of the depth of the lintel to allow for the cranked-up portion.

It may be pointed out that the depths for the various spans enumerated in the table are the minima ; but they need not be thus restricted, so that lintels of spans from 3 to 8 ft. in any particular building may all be made 9 in. deep if required. The reinforcement indicated should, however, be inserted despite increase of depth.

In the case of the $4\frac{1}{2}$-in. wide lintel, the cranked bar should be cranked an amount 3 in. less than the depth of the lintel, so that its lower portion lies above the two bottom bars, leaving more space between the rods when

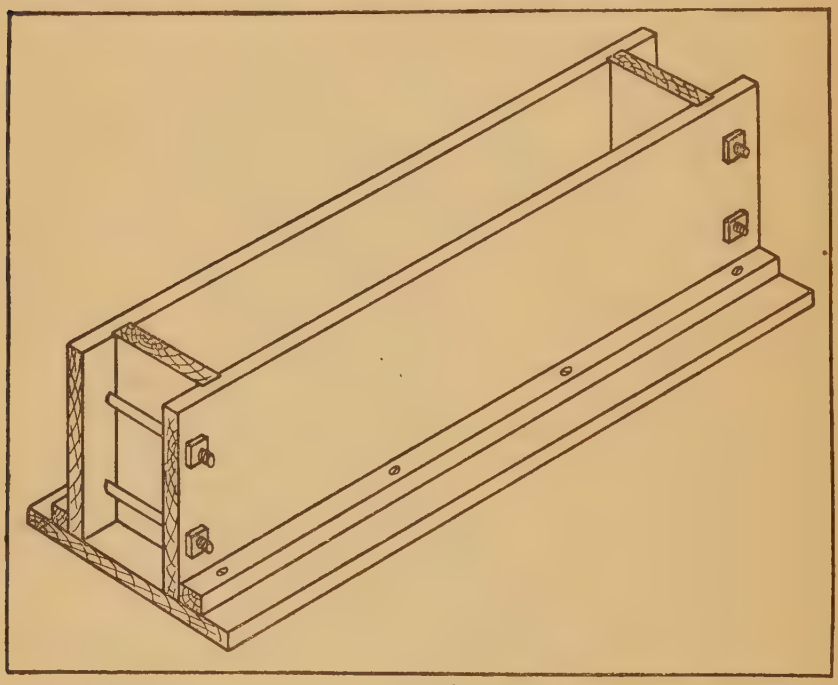

Fig. 16.

concreting. In all other cases the overall amount of cranked depth is to be 2 in. less than the total depth of the lintel.

Formwork.

Pre-cast lintels may be cast on the ground in a suitable mould, such as that shown in *Fig.* 16. The wood should not be less than $1\frac{1}{2}$ in. thick. If more than one board is necessary to make the base of the desired width they should be firmly held together by battens screwed on from the

underside; in any case it is desirable to raise the mould on battens in order to keep the base from contact with the ground. Ledges are screwed to the base, as shown, a distance apart according to the width of the lintel plus the thickness of the two sides plus about $\frac{1}{4}$ in. The extra $\frac{1}{4}$ in. is necessary to allow the sides to withdraw freely when stripping; if

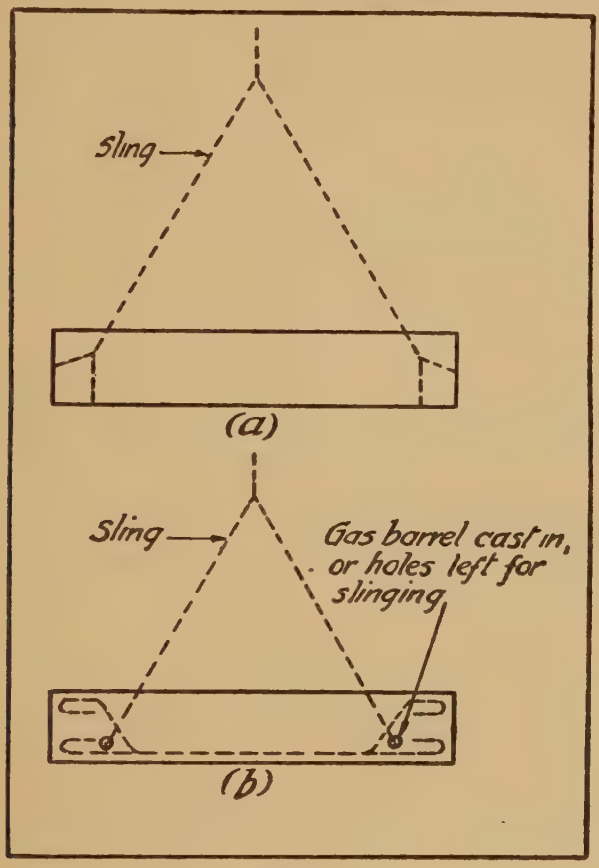

Fig. 17.

such an allowance is not made the swelling of the wood due to contact with wet concrete will result in the sides of the mould being so tightly pressed against the ledges that they will be difficult to withdraw. The ends are grooved into the sides, so that when the bolts are tightened a rigid mould is formed. In the case of lintels over 5 ft. long there is a

danger of the mould bulging in the centre ; this can be avoided by the use of cramps across the top at the centre of a long mould, or strips of wood placed across the mould and nailed to the sides would be satisfactory, the nails being partly driven only to facilitate removal.

To strip the mould, remove the bolts, ease out the sides, and take away the ends.

If a large number of lintels are required, a gang mould may be made on the same principle, with wood dividers between each lintel and long bolts threaded through the sides and dividers.

Lintels cast *in situ* follow the same lines as beams cast *in situ*, where provision is usually made for removing the sides first without in any way disturbing the soffit, which must be retained in position and firmly propped for the full maturing period.

Before concreting any lintel the steel should be accurately placed and held in position so that the concrete can be well rammed under and around the bars.

Lifting.

When lifting pre-cast lintels care must be taken that they are lifted vertically and not on their sides and that they are supported at or near each end, unless, of course, they are lifted on a cradle with a timber or stiff floor. Small holes or short lengths of gas barrel may be left in large and heavy lintels an inch above the bottom bars, but under the slope of the cranked-up bar (see *Fig.* 17). They must not be lifted at their centres, and any lifting or moving of the lintels whatsoever must be gentle and gradual, avoiding sudden hoisting and shock.

CHAPTER V

Floor and Roof Slabs

Loading and Supporting of Slabs.

THE following particulars relate to floor or roof slabs capable of carrying a superload of 1 cwt. per square foot exclusive of the dead load of the slab itself, and distributed if required over the whole area of the slab. This superload is suitable for most ordinary purposes such as for domestic buildings, offices, factories, etc., housing no heavy machinery; but it would not suffice for ballrooms, drill halls, book stores, warehouse floors carrying heavy merchandise, or for a floor subject to severe vibration or impact. Such floors as these must be designed individually for loads from twice to ten times the amount stated.

In addition to the superload it is often required that walls or partitions be built above the slab to form rooms and compartments, and care must be taken that these are supported immediately beneath the slab by walls of equal or greater thickness, by joists, beams or other adequate support. While it is possible for slabs of smaller span to carry light breeze concrete plastered partitions, it must not be forgotten that these weigh about 180 lbs. per foot run when 8 ft. high, which requires that the floor should not be fully loaded to 1 cwt. per square foot close to the wall.

It will be appreciated therefore that a 4½-in. wall, plastered both sides, which brings over 400 lbs. per foot run of wall on to the slab, cannot be built indiscriminately on slabs unless both these and their supports have been designed to take them. Where 4½-in. or thicker walls are necessary these must be built over the slab supports; or if not, special beams must be inserted underneath.

It is not good practice to support floor slabs on 4½-in. brick walls; particularly walls in lime mortar, unless they are of very small span; a 9-in. wall should be considered the minimum. Where a slab passes over a 4½-in. partition a space of ½ in. should be left between the underside of the slab and the top of the wall; this space may be plastered up after the slab has been struck. If this is not done there will be

danger of a crack forming on the upper surface of the floor following the line of the partition below.

Apart from walls, slabs may be carried on concrete beams with which they are incorporated or on rolled steel joists. The former will be dealt with later, but with regard to the latter there are two alternative methods:

(1) with the slab passing over the top flange;

(2) with the top flange of the rolled steel joists raised to within 2 in. of the upper surface of the slab.

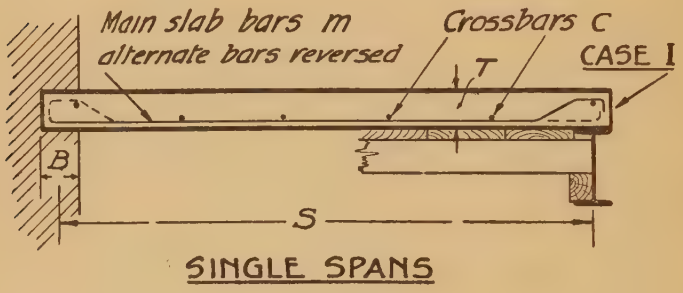

Fig. 18.

Case (1) makes the simpler job if there is no objection to the naked joist showing beneath, as illustrated on the right-hand side of *Fig.* 18. In continuous slabs the reinforcement, in this case, can pass freely over the joist.

Case (2) allows a few inches of headroom to be saved but requires haunching or the encasing of the joist in concrete. This is shown in *Fig.* 19, and if the casing is to envelop the joist completely a light mesh should be placed in the concrete around the lower flange. This method enables the cranked bars in the top of the slab to pass over the upper flange to gain the necessary continuity to transmit the tensional stresses, but necessitates the shortening of the lower bars, the ends of which must abut the web of the joist. The shuttering is more complicated and care should be exercised to see that the haunching is rammed solid, particularly under the upper flange, to transmit the compression through the web.

Formwork.

It is essential that the boarding should be rigid and amply strong to carry the wet concrete and any incidental load likely to come on or across the floor. The sheathing used is usually 1 in. or $1\frac{1}{4}$ in. carried on

4 in. by 2 in. or 6 in. by 2 in. joists at intervals up to 2 ft. or 2 ft. 6 in. according to the circumstances. In the case of a floor on concrete beams these joists may be supported at their ends by the side moulds of the beam, although additional centre supports may also be necessary according to span.

Where the floor rests on steel beams the joists may be supported on chocks and wedges resting on the lower flange, as shown in *Fig.* 18. If the beam is encased the boarding or joists will have to be supported

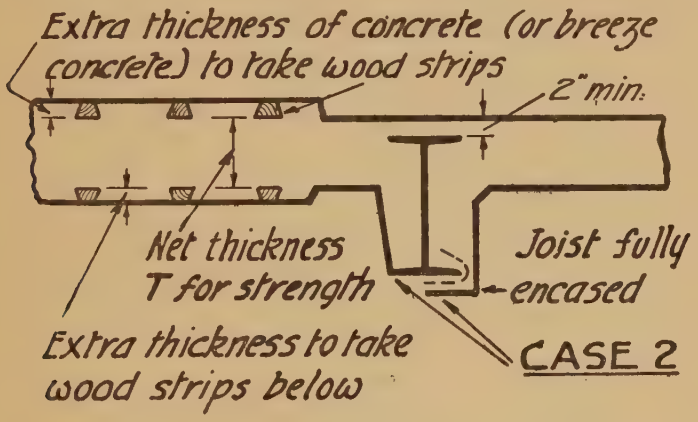
Extra thickness of concrete (or breeze concrete) to take wood strips
2" min.
Net thickness T for strength
Joist fully encased
Extra thickness to take wood strips below
CASE 2

Fig. 19.

on props, securely braced from below, unless special iron clips or bolts are devised to fit on the lower flange to hold the formwork temporarily and allow of its final removal.

Using ordinary Portland cement the boarding forming the soffit to floor slabs must not be struck until seven days have elapsed after pouring, while the floor should not be fully loaded for five or six weeks. Nor should a new concrete floor be used to support the props from a higher one unless it is mature and at the same time is structurally capable of taking the load without overstressing. If a test load is called for, this must not exceed 1½ cwts. per square foot, gradually applied and removed not earlier than eight weeks after the last portion was poured.

A plank walk raised clear of the reinforcement must be provided if the concrete is conveyed in barrows.

Placing of Reinforcement.

The centre lines of the bars should be clearly marked or chalked on the upper surface of the boarding before the reinforcement is placed.

This will save much time in the end. If the same centres continue for some distance it is worth while making a template by notching the lower edge of a board at the correct intervals, through which the bars can pass and become correctly placed automatically.

Crossbars are placed above the main bars in the bottom, and below in the top of a slab. The whole mesh must then be firmly wired at the crossings to resist displacement during concreting. Great care must be exercised that the cranked-up bars in the top of the slab do not roll over and fall into the centre or bottom. It is essential, particularly in continuous slabs, that the cover above the top bars be equal to that below the lower bars, namely $\frac{1}{2}$ in. The lower cover can be maintained conveniently by short lengths of $\frac{1}{2}$-in. bar placed immediately on the boarding and withdrawn as concreting proceeds. They must, of course, be pulled along as soon as the concrete has been tamped beneath the main bars and can support it, and not left until the concrete has commenced to set, when removal would injure the slab. The bars in the top can be supported on small concrete blocks of the required size to hold the reinforcement at its proper level. Wood blocks should not be used on account of the danger of their being accidentally concreted in. This risk is minimised by the use of concrete blocks, metal chairs or spacers.

Concreting.

Commencing at one support, a definite area of slab should be enclosed by vertical boards of the exact depth of the slab and temporarily fixed to act as runners for the screeding board and to form a rigid side against which the concrete can be rammed. It may be necessary to notch these to allow bars to pass through. The concrete must be poured to its full thickness in one operation and must be thoroughly pushed and tamped under and around the bars. The final spading should leave the upper surface a little on the high side so that the screeding board, when worked slowly forward with a to-and-fro movement, brings the surface to true level against a slight pressure of wet concrete. After that neither the concrete nor the projecting bars should on any account be disturbed.

Where it is not possible to finish the whole slab at one pouring the joint should be chosen along the centre of the slab, midway between two supports. On no account should it be made over or near the main supports of a slab. A temporary board should be fixed to finish against, and the joint washed and grouted before continuing next day.

Finishes to Slabs.

On the underside it is sometimes required that " grounds " or tapered strips of wood be concreted in to carry ceilings, etc. In these cases

additional thickness must be allowed to take the strips without encroaching on the normal cover under the bars as shown in *Fig.* 19.

The same applies to boarded finishes to the upper surface, although generally the extra thickness is executed in breeze concrete. To place wood strips in the net thicknesses of slab given later, either in the top or bottom, may reduce the strength by more than 50 per cent.

Granolithic may be laid as soon as the slab has taken its final set, providing every care is taken not to vibrate or injure the green concrete. Scoring and fluting the surface may be carefully undertaken while the surface is soft, by the free use of planks and walking boards. For the production of hard and wear-resisting surfaces there are other preparations which are applied either in liquid form, such as silicate of soda, or as a finishing coat.

Single-Span Slabs.

Single-span slabs may be defined as slabs which span between and rest on two supports only. The supports referred to are those closest together between which the main slab bars run. There will usually be end supports—such as the two end walls of a long corridor—but these are of no value in supporting the bulk of the slab. The supports may be brick walls, concrete beams, steel joists or a combination of any, as shown in *Fig.* 18. The particulars for spans up to 10 ft. are given in *Table* 12. The span "S" refers to the distance, centre to centre, of the supports; "B" gives the minimum end bearing on walls in inches; "T" gives the thickness of the slab in inches; column "m" gives the diameters and centres of main bars in inches, and column "c" the number and diameter of crossbars. The remainder of the table gives the volume in cubic feet of the concrete and the weight of reinforcement required per square yard of slab, together with particulars of the length and bending of the bars. The depth of the crank is measured outside to outside of bar, leaving $\frac{1}{2}$ in. cover of concrete top and bottom when in place.

The following example will illustrate its use: Required a slab to span between a wall and joist 4 ft. 6 in. clear, as shown in *Fig.* 18. If breadth of top flange is 4 in., span "S" becomes 4 ft. 6 in. + 2 in. + $2\frac{1}{4}$ in. = 4 ft. $10\frac{1}{4}$ in.

Referring to *Table* 12, and reading from line "5 ft. and under," we find we require a 4-in. slab with $\frac{3}{8}$-in. main bars at 8-in. centres and six $\frac{5}{16}$-in. crossbars. If there are 20 sq. yds. of slab (note that this area must include that let into the wall in the case of a chase left in wall) then 60 cu. ft. of concrete and 162 lbs. of steel are required. Each main bar will be 5 ft. $5\frac{1}{2}$ in. long, cranked 3 in. to a 6-in. slope 4 in. from one

1·2·4 CONCRETE

SINGLE SPAN SLABS

LIVE LOAD 112 lbs. PER SQ. FT.

SPAN S	END BEARING B IN.	SLAB THICKNESS T IN.	MAIN BARS m DIAM: IN.	MAIN BARS m CTRS: IN.	CROSS BARS ℄ AT NOT MORE THAN 12 IN CENTRES	QUANTITIES PER SQ. YARD OF FLOOR — CONCRETE CU: FT:	REINFORCEMENT LBS:	LGTH. OF MAIN BARS	BENT	CRANK IN.
3'-0" & UNDER	3	4	¼	7	4 - 5/16	3	5·3	S+B+3"		3
3'-6" " "	3	4	¼	6	4 - 5/16	3	5·7	"	" " "	3
4'-0" " "	4½	4	¼	5½	5 - 5/16	3	6·2	"	" " "	3
4'-6" " "	4½	4	5/16	6	5 - 5/16	3	7·3	"	" " "	3
5'-0" " "	4½	4	⅜	8	6 - 5/16	3	8·1	"	" " "	3
6'-0" " "	4½	4	⅜	6	7 - 5/16	3	9·1	"	" " "	3
7'-0" " "	6	4	⅜	5	8 - 5/16	3	11·6	"	" " "	3
8'-0" " "	6	4½	⅜	4½	9 - 5/16	3·375	12·8	"	" SLOPE 7" "	3½
9'-0" " "	6	5	½	7	11 - 5/16	3·75	13·2	"	" SLOPE 8" "	4
10'-0 " "	6	6	½	6	11 - ⅜	4·5	17·0	"	" SLOPE 10" "	5

TABLE 12.—SINGLE-SPAN SLABS.

end, and both ends bent up or down 2 in. Alternate bars will be reversed so that a straight end runs on to a support between two cranked ends, throughout the length of the slab. The crossbars should extend the length of the slab, but if it is necessary to splice them, the laps must be at least 18 in. long, well wired, and staggered on plan.

Continuous-Span Slabs.

As their name implies, continuous-span slabs carry over three or more supports, the slab being monolithic or continuous over the support. This continuity has two effects : (1) it results in an economy of material, (2) it introduces certain conditions which it is important to appreciate because they are not so common or so vital in other types of building construction.

These conditions are the reverse moments at supports, causing tensional stresses in the top surfaces of slabs for some distance on each side of a support. These stresses, being taken only by the steel, call for the accurate placing of the reinforcement bent up over the supports. A load placed on one span always affects the spans on each side through this continuity, so that a large span continuous with a much smaller one will cause effects too complicated to explain here.

In the particulars that follow, therefore, it is assumed that the spans are of approximately the same order, deviating to say not less than 75 per cent. or more than 30 per cent. from the standard adopted. This can usually be achieved by inserting more walls or beams below or by rearranging their intervals. For convenience when spacing supports the inner spans should be kept constant to some even amount of feet and inches, while the two end spans should be made less. Always avoid larger end spans.

Particulars and sizes are given in *Table* 13, while *Figs.* 20, 21 and 22 illustrate the typical arrangement of bars. It will be noticed that the thickness of slab for any particular span is the same for end as for inner spans, but that the reinforcement is usually slightly heavier in the case of end spans.

In arriving at the lengths of the main bars (m),

Se = the length of end span,
Si = „ „ „ inner „

as shown in *Fig.* 20, a section taken parallel to the main bars.

Note that the bars in the top run past the centre line of the secondary beam or joist by an amount " e " given in the Table, and that the crank turns up at a length " d " on the other side : this point should be marked on the boarding to facilitate placing. At their straight ends they must run 6 in. past the centre line of the support. The cross-

1·2·4 CONCRETE

CONTINUOUS SPAN SLABS

LIVE LOAD 112 lbs. PER SQ. FT.

SPAN S	SLAB THICKNESS T IN.	END SPANS — MAIN BARS m — DIAM: IN.	CTRS. IN.	WT: PER SQ. YARD	d	e IN.	LENGTHS	INNER SPANS — MAIN BARS m — DIAM: IN.	CTRS. IN.	WT: PER SQ. YARD	d	e IN.	LENGTH
3'-0" & UNDER	4	¼	9	5·1	Se/5	12	Se + & 10" / Sa + 1'-7"	¼	9	5·7	Si/5	12	Si + 1'-9"
3'-6" " "	4	¼	9	5·1	"	12	" + 10" / " + 1'-7"	¼	9	5·6	"	12	" + 1'-9"
4'-0" " "	4	¼	9	5·1	"	12	" + 10" / " + 1'-7"	¼	9	5·4	"	12	" + 1'-9"
4'-6" " "	4	¼	6½	6·1	"	15	" + 10" / " + 1'-10"	¼	7½	6·0	"	15	" + 2'-1"
5'-0" " "	4	¼	5½	6·7	"	15	" + 10" / " + 1'-10"	¼	6½	6·5	"	15	" + 2'-0"
6'-0" " "	4	5/16	6	8·3	"	18	" + 10" / " + 2'-1"	5/16	7	8·2	"	18	" + 2'-3"
7'-0" " "	4	⅜	6	10·7	"	21	" + 10" / " + 2'-4"	⅜	7	10·4	"	21	" + 2'-6"
8'-0" " "	4	7/16	6½	12·7	"	24	" + 10" / " + 2'-7"	7/16	8	11·8	"	24	" + 2'-9"
9'-0" " "	4½	7/16	6	13·7	"	27	" + 10" / " + 2'-10"	7/16	7	12·7	"	27	" + 3'-0"
10'-0" " "	5	½	6½	16·0	"	30	" + 3'-1"	½	7½	15·1	"	30	" + 3'-3"

END BEARING B. QUANTITIES OF CONCRETE, CRANK & SLOPE MEASUREMENT OF BAR SAME AS EQUIVALENT SLAB THICKNESS IN TABLE B

CROSSBARS C. ONE LESS THAN FOR EQUIVALENT SPANS IN TABLE B — OR 5/16" BARS AT NOT LESS THAN 12" C/C

TABLE 13.—CONTINUOUS-SPAN SLABS.

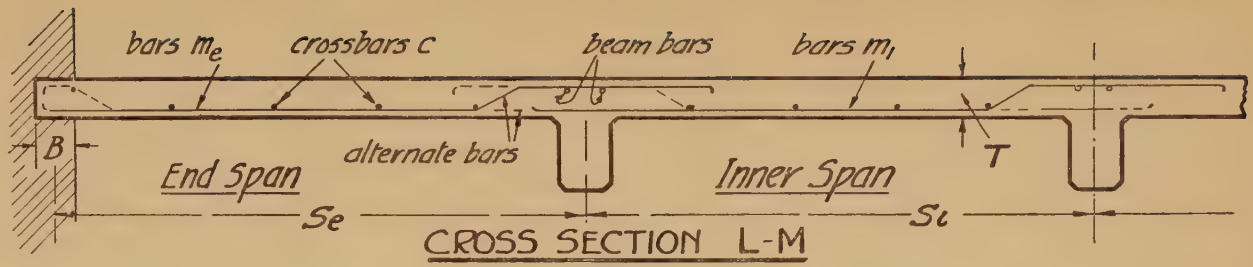
bars m_e
crossbars c
beam bars
bars m_i
B
alternate bars
T
End Span
Inner Span
Se
Si
CROSS SECTION L-M

Fig. 20.

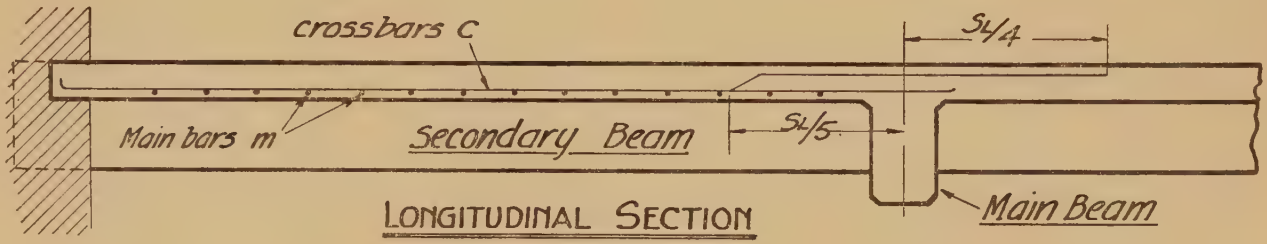
crossbars c
Si/4
Main bars m
Secondary Beam
Si/5
Main Beam
LONGITUDINAL SECTION

Fig. 21.

bars, where they run over main beams, joists, or walls are also dealt with similarly, as indicated in *Fig.* 21. Crossbars, however, lie on top of main bars in the bottom of slabs, but below main bars in the top of slabs.

Two types of bar are required as main reinforcement to end spans, the one alternating with the other. The cranked end resting on the

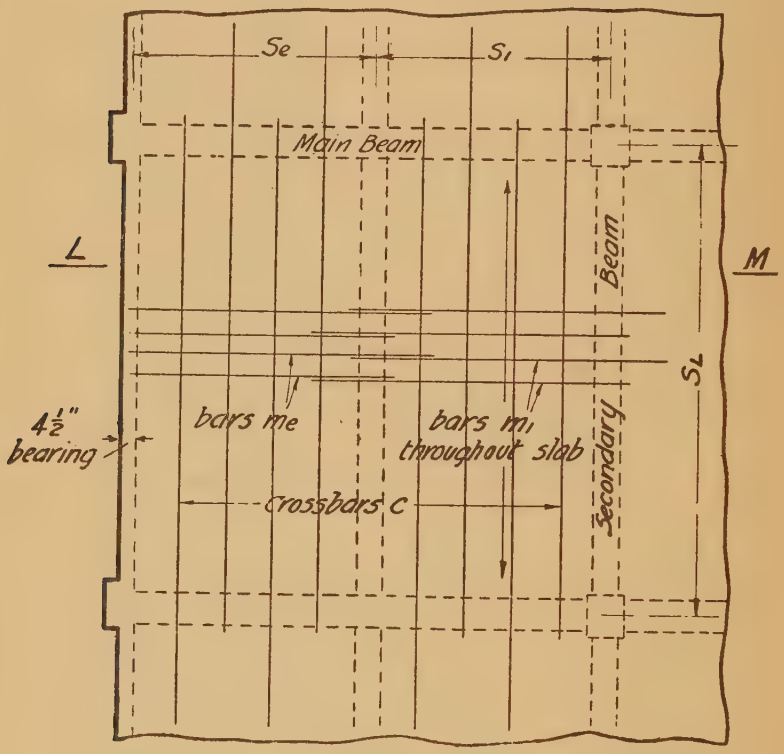

Fig. 22.—Plan.

end support is bent as for single-span bars given in *Table* 12. Bars for inner spans are of one type but the cranked ends project alternately in opposite directions as indicated on the plan *Fig.* 22.

The bending and lengths are figured for slabs on concrete beams or passing wholly over the top flange of rolled steel joists. If the flange of the latter is raised to within 2 in. of the upper surface of the slab then the cranked-up bars will pass over freely; but their straight ends must

be shortened so as to abut the web of the joist, which must be haunched or encased with concrete.

The weights of reinforcement given include for crossbars and laps and must be considered a minimum. For convenience the size of bars may be increased or their centres reduced, to maintain the same thickness of slab throughout a floor.

Example.—A floor slab is required to carry a maximum live load of 1 cwt. per square foot over concrete beams spaced at 5-ft. centres (*Si*) with an end bay span of 4 ft. 6 in. (*Se*) (equivalent clear end span 4 ft. $3\frac{1}{2}$ in.).

From *Table* 13 the thickness of slab "T" is found to be 4 in. for inner and end spans. Also the reinforcement is similar, namely, $\frac{1}{4}$-in. diameter bars at $6\frac{1}{2}$-in. centres. Had the end bay been 5-ft. span then the end span reinforcement would have been $\frac{1}{4}$-in. bars at $5\frac{1}{2}$-in. centres. The length of the main bars would be 5 ft. 4 in. and 6 ft. 4 in. (an equal number of each to be supplied) for the end span and 7 ft. for the inner bays. Five $\frac{5}{16}$-in. crossbars are required in the end bays and four in the inner—note in the case of concrete beams the top bars of the beam take the place of a crossbar. With rolled steel joists extra crossbars would be required in these positions. The crossbars should be bent and placed as shown in *Figs.* 21 and 22.

Quantities.

For estimating purposes the quantities from *Tables* 12 and 13 will be found to be:

Concrete	3 cu. ft. per square yard of floor.
Reinforcement (end spans) .	6·1 lbs. ,, ,, ,, ,, ,,
,, (inner spans) .	6·5 lbs. ,, ,, ,, ,, ,,

Roof Slabs.

Roof slabs that are not intended to carry any live load except that due to snow, etc., or an occasional person crossing them (such as the flat roof to a building having no easy access to the roof) may be constructed to carry an incidental load of 56 lbs. per sq. ft. instead of 112 lbs. per sq. ft.

It is not desirable to reduce their thickness to a minimum as hair-cracking may result which will give trouble by allowing rain-water to percolate through, especially after a spell of dry weather. To make perfectly sure of a weathertight roof a continuous covering, such as asphalt, should be provided. A small fall should, of course, be arranged and an adequate drain-off.

As regards dimensions for the slab to carry 56 lbs. per sq. ft., *Tables* 12 and 13 can be employed as before; but the steel, and thereby the weight of steel, may be reduced as follows for any particular span: The centres of the main bars "m" may be increased by 50 per cent. up to a maximum of 9 in. Thus the centres of all main bars in *Table* 12 may be 9 in. except for the 4-ft. and 8-ft. spans, which will be 8 in. and 7 in. respectively. In *Table* 13 all main bar centres may be 9 in. except that for the 5-ft. end span, which will be 8 in.

CHAPTER VI

Panel Walls

WHILE, generally speaking, brick or concrete block walls are cheaper than *in situ* reinforced concrete walls, the latter have the advantage of being lighter and stronger and of stiffening a building very considerably.

A panel wall is built monolithic with the columns and beams between which it occurs, as shown in *Fig.* 23. The reinforcement consists of two meshes formed of horizontal and vertical bars which project into the panels on each side and above, and are lapped on to the bars projecting from below.

Openings of any size or shape may be left. In the case of a window or rectangular opening the bars forming the mesh would be cut and given a turn or hook at the side of the opening. In addition, two $\frac{1}{2}$-in. bars must be run as trimmers both vertically and horizontally around the opening, allowing $\frac{1}{2}$ in. to 1 in. cover.

The meshes are placed $\frac{1}{2}$ in. from the faces of the wall, and are to be so arranged that the bars are staggered in section, so that in elevation the double mesh appears to be one-quarter the size of the single mesh.

The thinnest internal wall should not be less than 3 in. thick if under 10 ft. long or high. The thinnest external wall usually adopted is 4 in., but large panels should be made thicker; also thicker walls should be adopted if a weatherproof job is required.

Table 14 shows the thickness of wall and the reinforcement required, and gives the quantities per square yard of wall for average purposes and sizes. For special purposes, such as for retaining the ground in a cellar, or for stacking coal against, etc., special designs would have to be prepared to suit the circumstances.

The minimum lap to be given to the bars is as follows: $\frac{1}{4}$-in. bars, 15-in. lap; $\frac{5}{16}$-in. bars, 18-in. lap. This lap is shown as "*l*" in *Fig.* 23.

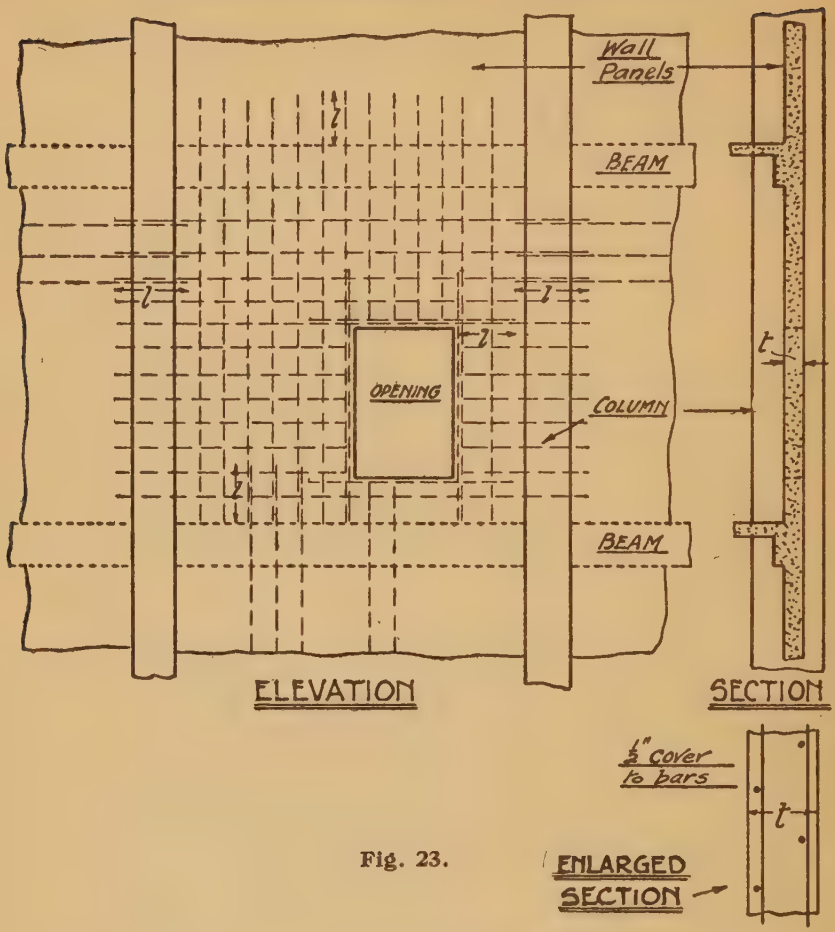

Fig. 23.

TABLE 14.

Thickness of Wall, ins.	Reinforcement for each side.	Quantities of Concrete per sq. yd. (in cu. ft.).	Wt. of reinforcement allowing 10 per cent. per lap per sq. yd. (in lbs.).
3	$\frac{3}{4}$ in. at 15 in. c/c. both ways	2·25	5·3
4	$\frac{1}{4}$ in. at 12 in. c/c. both ways	3·00	6·6
5	$\frac{5}{16}$ in. at 15 in. c/c. both ways	3·75	8·4
6	$\frac{5}{16}$ in. at 12 in. c/c. both ways	4·50	10·5

CHAPTER VII

Staircases

THERE is some difficulty in describing the construction of a concrete staircase with definite and working details that will be applicable to general cases, because the plan of a building will influence to a considerable extent not only the rise, "going," and arrangement of the steps, but also the type of construction which will be most suitable. The space available for the stairs may necessitate the use of winders in some cases, with others a quarter-space or half-space landing may be arranged, while the question of support on one or both sides of the flights will influence the decision to use any one of the alternative methods that are possible.

A staircase can be considered as an intimate part of a building and one which is necessarily determined by the use, type, and arrangement of the building itself, and no very definite recommendation can be made without a knowledge of the general design and use of the structure, as the staircase must fit in with the plan and section as laid down on the drawings.

Pre-cast Steps.

Reinforced concrete is an excellent material for the construction of staircases of all kinds, as the material is very adaptable and can be applied to many cases where the provision of support for other materials of construction would present considerable difficulty and expense. The material may be pre-cast as single steps which are built in as the work proceeds, or it may be *in situ* concrete formed in the usual manner with shuttering.

The use of pre-cast steps does not call for special comment, as the units are easily made in a suitable mould, and fixed by building in one or both ends as with stone steps. It is advisable to introduce a small amount of reinforcement in each unit to facilitate handling without breakage, and in the case of steps fixed at one end only some reinforce-

ment in the upper surface is necessary on account of the cantilever action that has to be provided for.

In Situ Stairs.

The best concrete staircase is the *in situ* reinforced concrete type when straight flights can be constructed with a support at each side or each end, and when simple form work is possible and no winders or other special shapes are required. Generally speaking, the staircases can be defined as coming under one of the following descriptions :

(*a*) Supported on both sides of the flight.
(*b*) Supported on one side only.
(*c*) Supported at both ends of the flight.
(*d*) Independent flights.

To some extent it is possible to get a partial combination of these types, for example when the flight is supported on one side and at each end.

Under the first-mentioned type, when the stairs are supported on both sides, is the simple staircase flight constructed between two walls or partitions of sufficient strength to carry safely the whole weight of the stairs and the load which will be placed upon them. In this instance it is only necessary to design the stairs as a reinforced concrete slab having a span equal to the width of the flight, and an example of this kind is described in detail later. Type (*b*) is probably the most common case met with in practice. It means that one side of the flight will come against the wall of the staircase well, and the end of the steps can be built or carried into the wall to give a bearing of, say, $4\frac{1}{2}$ in., but the outer edge of the flight will be free and unsupported so far as walls or partitions are concerned. The flight can then be designed as a slab cantilever, with reinforcement in the upper surface ; but this will not be generally economical, and it is preferable to provide a reinforced concrete string at the outer edge, which supports the actual steps and which in turn is supported at the top and bottom of the flight according to the circumstances. This method is economical and generally satisfactory, as the concrete string acts as a simple reinforced beam which covers the ends of the steps and provides fixing for the balusters. The reinforcement in the steps is carried into the string, and the whole is concreted in one operation to give a monolithic structure.

The third type mentioned (*c*) is that when the flight is supported at both ends only, and this method is by no means uncommon in practice. When thin partitions only are provided to enclose the staircase, and the ends of the steps cannot be directly supported or built in, it is necessary to give a bearing at each end of the flight by means of beams at the

landings or floor levels, and conduct the weight of the stairs directly to such bearings. In some instances the actual flight is designed as a beam with reinforcement in the soffit to take the tension, the concrete steps providing the resistance to compression; but this method is not generally economical, and the provision of reinforced concrete strings on each side of the flight to act as supporting beams is preferable. If it is necessary to expose the ends of the steps, as in the type known in wooden stairs as the "cut string" type, then the reinforcement in the soffit only is necessary, because the use of the beam at the end of the steps results in what is known as the "close" string type, and while the latter is generally suitable and acceptable, there are cases when the effect required necessitates the former method.

Section of Steps.

The actual step may be moulded to any reasonable shape, but generally the ordinary vertical riser face will be adopted for the small building,

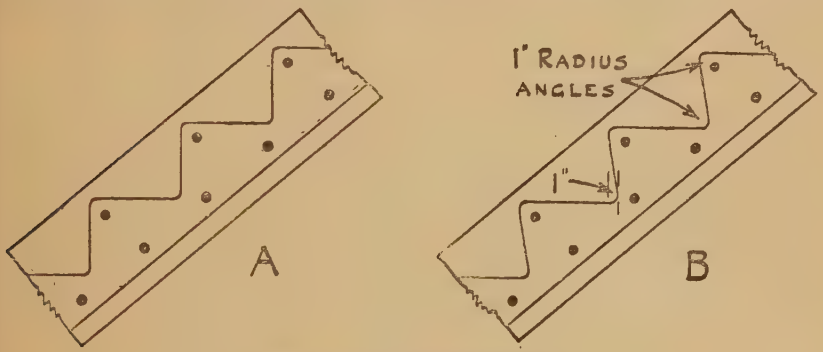

Fig. 24.—In Situ Steps.

and the junction with the tread will be slightly rounded off to prevent a sharp angle, which would be liable to chip off under rough usage. This type of step is shown at A in *Fig.* 24. The use of the ordinary nosing adopted for wooden stairs is not satisfactory, as it is liable to be broken away, and also necessitates additional work in execution, which is seldom justified.

If it is desired to increase the width of the tread over that provided by the actual "going," this may be done by using the section given at B in *Fig.* 24, when it will be seen that the riser face is formed with a slope of 1 in. outward at the top, thus giving a larger tread, and at the same time avoiding a thin projection or overhang which would be

subject to damage. The angles at the junction of tread and riser should be slightly rounded, as this will increase the resistance to wear and render the steps easy as regards cleaning down.

In the case of pre-cast steps, as shown in *Fig.* 25, these are made with a special " back " joint, which provides for a good bearing for each step on the one below. It will be noticed that the tread of the lower step extends under the riser of the step above, for a distance of about 1½ inches, and the joint is then made at right angles to the slope of the soffit. This method gives a bearing for the vertical thrust and also for the inclined pressure due to the tendency of the steps to slide down the angle of the staircase. Three rods are usually provided in pre-cast steps



Fig. 25.—Pre-cast Steps.

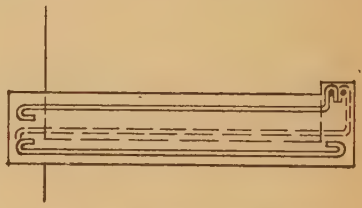

Fig. 26.—Cantilever Steps.

to facilitate handling and resist tension when fixed, and these three rods should be tied together with links as indicated on the section.

Fig. 26 gives the details of a cantilever step when one end only is carried by a wall and the outer end is carried into a concrete string connecting all the steps in the flight. In this case the main reinforcement will be provided in the upper surface of the step.

Baluster Fixing.

Some difficulty may be experienced in providing a simple and inexpensive method of fixing the balusters and handrail in the case of concrete staircases, but the difficulty can be overcome by a little careful consideration of the possibilities. In the case of a flight of steps carried between two walls or partitions for the full length no baluster will be required and the handrail can be fixed in a simple manner by the use of wall brackets attached to the wall or partition on one or both sides of the flight as required. These brackets are obtainable in many different shapes and sizes, and are fixed in the ordinary manner to suitable plugs.

Wood balusters present more difficulty, as they cannot be satisfactorily attached directly to the concrete, and it is necessary to provide an intermediate member between the balusters and the concrete string.

This can be done by the provision of a continuous wood capping, as shown in *Fig.* 27, which can be moulded, chamfered, or plain as desired, and may be any reasonable size to suit the string, and with a minimum thickness of 2 in.

The fixing of this capping is achieved by the use of bolts $\frac{1}{2}$ in. or less in diameter placed in the shuttering and concreted in when the staircase is under formation ; these bolts are left standing up above the level of the concrete the correct distance to suit the thickness of the capping. When fixing the latter a sinking is made for the bolt-head and the hole is subsequently filled in with a small piece of wood to give a neat finish. The balusters are fixed to the capping in the ordinary way by housing in the ends, and this can be done as simply as in the case of a wooden staircase.

In many instances iron balusters are used in conjunction with concrete stairs. These are usually of simple plain square section, and their



Fig. 27.—Method of fixing Wood Balusters.



Fig. 28.—Method of fixing Iron Balusters.

fixing does not present any difficulty (*Fig.* 28). The spacing of the balusters is first decided, and small wood plugs are cast in the upper part of the concrete string to suit each baluster. After the concrete has sufficiently hardened the wood plugs are withdrawn, leaving a hole in the concrete for the bottom of each baluster. When the whole of the balusters are placed in position, the handrail attached, and the whole lined up, the balusters can be grouted in with cement and stone dust or other material which will give the same appearance as the main body of concrete. It was common practice to fix iron balusters into stone steps by running in with lead, but this will be unsightly and unnecessary in these days of strong and reliable cement, which will provide all the fixing necessary, particularly if the ends of the balusters are slightly dovetail in shape or roughened to give maximum adherence.

Surface Finish.

Several different methods of finishing the surface of a concrete staircase are possible, and, generally speaking, almost any desired effect

can be obtained. The finish of the soffit and strings will come under the ordinary heading of surface finishes, and needs no special comment here.

In the case of the treads, however, the question of a surface which will be non-slippery and at the same time wear-resisting has to be considered, and as the staircase cannot conveniently be finished in the one operation of placing the concrete the surface finish is usually applied as a distinct layer on the concrete.

In concreting the flight it is, of course, necessary to start at the bottom and work upward, whereas in the case of any applied plastic coat, which must harden before pressure is allowed, it is necessary to work from the top downward to avoid damage by the workman applying the material. There are, of course, some exceptions to this rule, but these need not be dealt with in these notes.

The most general finish for the tread and risers is that obtained by the use of granolithic or similar material, applied by the plasterer or floor finisher, as a layer having a thickness of 1 to 2 inches according to requirements. When the tread surface is being laid it is advisable to form some sinkings or grooves near the front of step to give a good grip to the feet, and, in order to improve the wearing qualities, carborundum powder is sprinkled on each tread and ironed into the surface of the green concrete. In high-class work the surface of the concrete is covered with various materials, such as cast stone, marble, patent compositions, or rubber.

Constructional Details.

Some details of the common types of concrete staircases suitable for small buildings are here given as a guide to the contractor who may be desirous of using reinforced concrete. The drawings and particulars provided can be applied for the typical cases given or adapted when applicable to somewhat similar cases.

The plans and sections illustrated in *Figs.* 29 and 30 show the general arrangement for a staircase 3 ft. wide to travel a height of 9 ft. in two plain flights with a half-space landing mid-way between the two floors. The supports are provided by a bearing on the wall enclosing the staircase, by the raking beams or strings, and by cross-beams at the landing and upper floor level. In designing the reinforced concrete work the steps are considered as slabs or beams having a span equal to the width of the flight, and the reinforcement is placed in the lower surface, with ends carried on to the wall bearing into the string and finished with hooks.

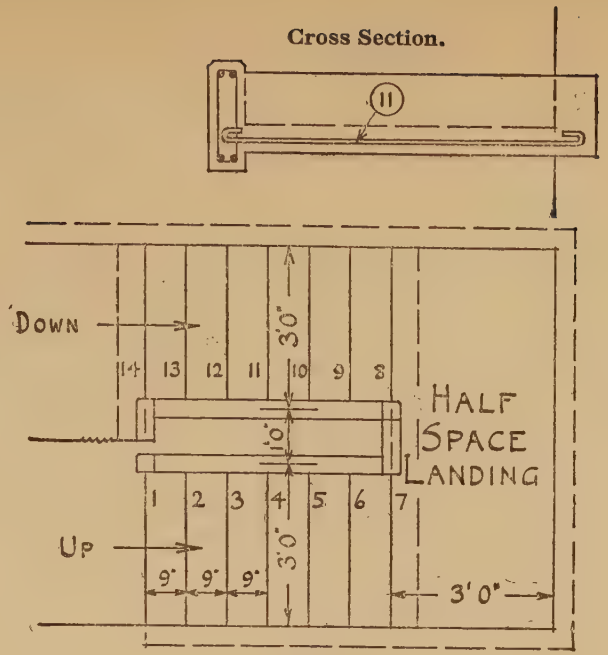

Plan.
Fig. 29.

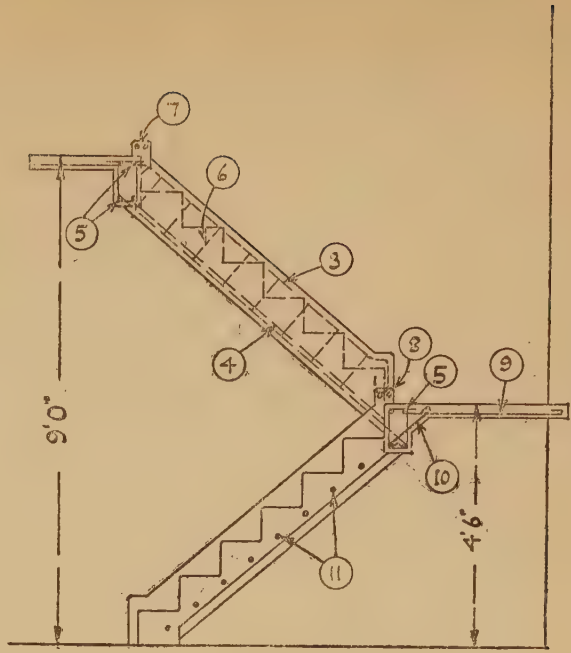

Section.
Fig. 30.

TYPE I.

SCHEDULE OF RODS FOR TYPE 1

BAR No	DIAM	LENGTH	SHAPE	No OFF	TOTAL LENGTH	TOTAL WEIGHT
1	3/8"	6'9¾"		2	13'7½"	LBS 5·4
2	3/8"	6'9"		2	13'6"	5·4
3	3/8"	7'1¼"		2	14'2½"	5·6
4	3/8"	8'2"		2	16'4"	6·5
5	½"	8'5"		8	33'8"	23·5
6	No 8 S.W.G.	3'2"	STIRRUPS FOR Nos 1, 2, 3, 4, & 5.	37	117'2"	7·5
7	3/8"	5'1½"		2	10'3"	4·1
8	3/8"	1'10½"		2	3'9"	1·5
9	3/8"	3'11½"		8	31'8"	12·6
10	3/8"	1'7"		8	12'8"	5·0
11	3/8"	4'2½"		16	67'4"	25·3

Fig. 31.

Reinforcement.

A schedule of the reinforcement required is given in *Fig.* 31, which gives the size and shape of each rod together with the total length of all

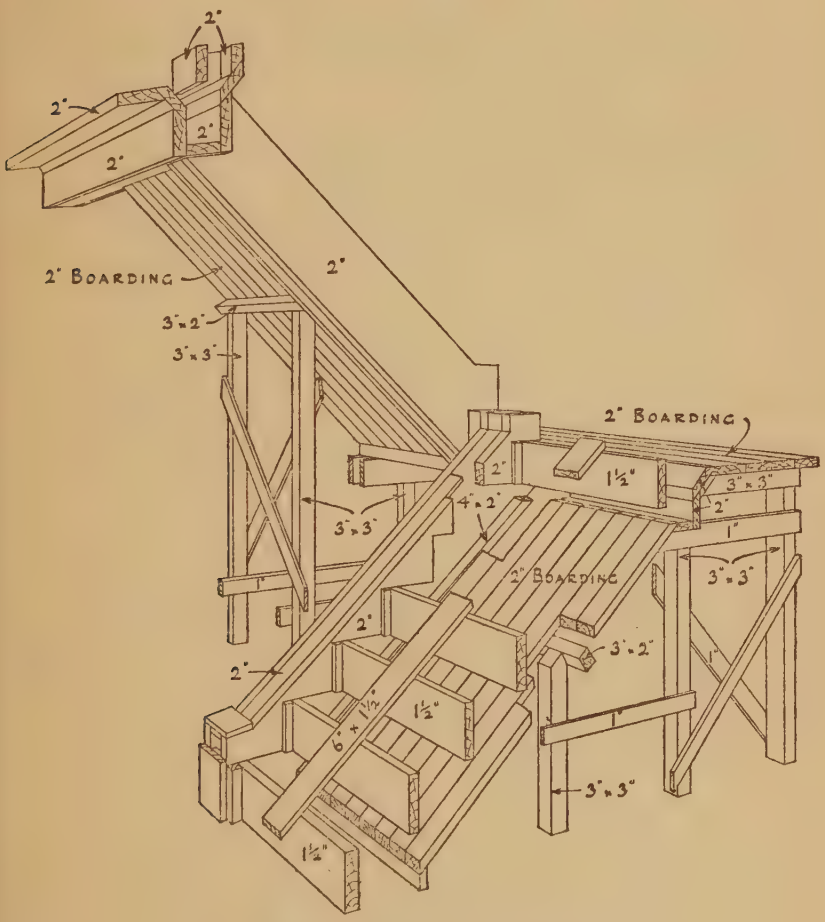

Fig. 32.—Formwork, Type I.

the rods and the weight of steel involved. The various rods should be cut to length and bent to the specified shape. The different members can then be built up as a series of cages or units as illustrated in *Fig.* 33, and when wired together the units can be placed in the forms and fixed

in position ready for concreting. Assembly in this manner will ensure accuracy, and at the same time it is an economical method which permits the maximum supervision and inspection of the reinforcement.

Formwork.

The formwork for a staircase of this kind is a fairly simple arrangement, and a general indication of a suitable construction is given in

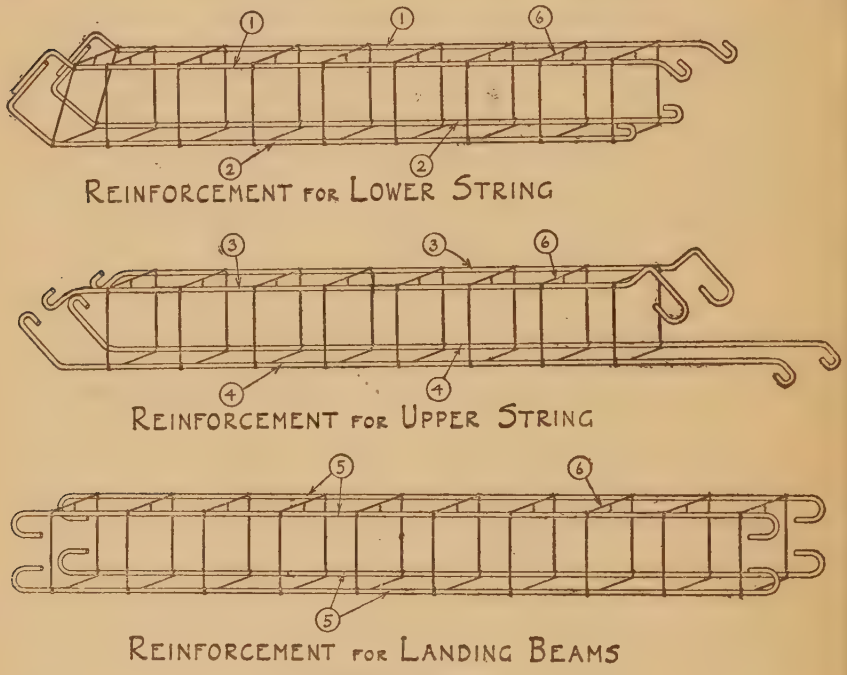

Fig. 33.—Type 1.

Fig. 32. Each particular instance will require to be dealt with according to circumstances, and the diagram should be taken as a rough guide only; while it may appear complicated in the illustration it will in reality prove a simple structure that can be erected by any good carpenter.

The outer face of the string is confined by a plain 2-in. board built up with longitudinal members and cross battens where the total depth makes this necessary, and the inner face of the same member is held by a plain board notched out on the lower edge for the actual steps. The soffit of the flight is supported by 2-in. boarding supported as required

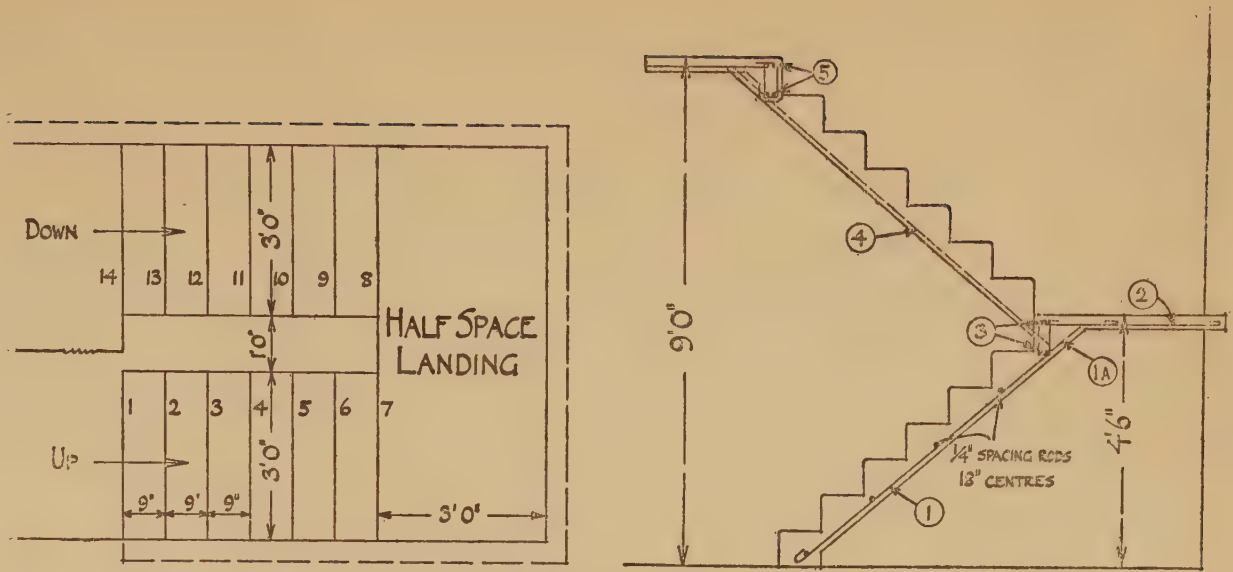

Plan. **Fig. 34.—Type 2.** Section.

by bearers and struts, and the treads are held up by vertical boards only placed at each riser face. These boards are held at each end and are also tied together at one or more points in the width by longitudinal battens nailed on to the upper edges as indicated.

Bar No.	Diam	Length	Shape	No. Off	Total Length	Total Weight
						LBS
1	3/8"	6'2¼"	4" 2" To fit ½" rod 2" 5' 10½"	3	18'6¾"	7·4
1A	3/8"	8'0"	6'6" 8½" 2" 4" 4" 1" 12"	3	24'0"	9·6
2	3/8"	3'6"	2" To fit ½" rod 2" 1" 3'0"	9	31'6"	12·6
3 & 5	½"	8'3"	3" 2½" 3" 2½" 7'6"	4 4	66'0"	43·6
4	3/8"	7'3"	2" 2" To fit ½" rod 6'10"	3	21'9"	8·7
4A	3/8"	8'11"	8½" 7'6½" 4" 1" 3" To fit ½" rod 3"	3	26'9"	10·7

Fig. 35.—Schedule of Reinforcement, Type 2.

The landings and beams are dealt with by formwork erected on similar lines to that employed for floors.

It will be seen that the concrete in the actual steps is not confined by horizontal boards on the top of the tread, and for this reason care must be exercised in mixing and placing the material. If the mix is made too wet there will be a tendency for the upper concrete to push

out the lower concrete by causing it to flow over the top edge of the riser boards. It is necessary to use the minimum amount of water in the mix and place the material carefully in position in small quantities and without forcing the speed of the work.

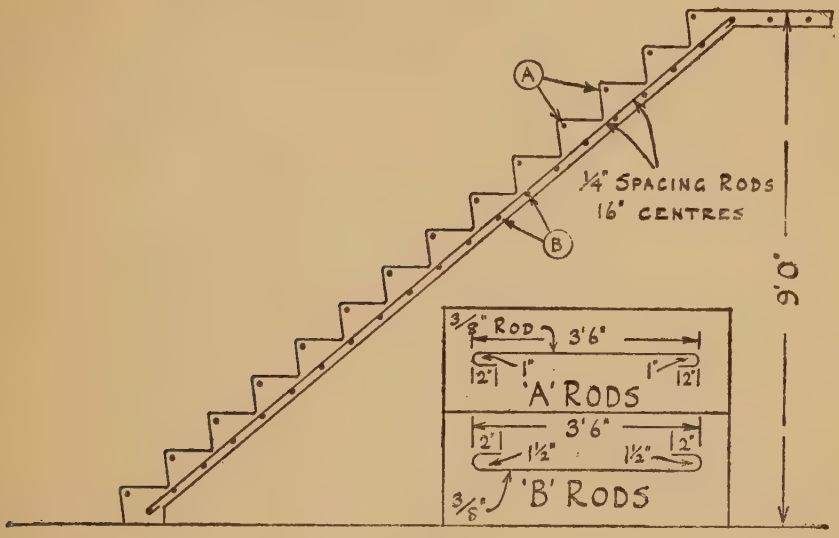

Section.

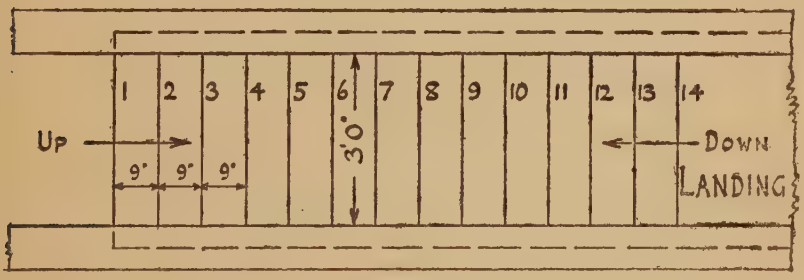

Plan.

Fig. 36.—Type 3.

If horizontal boards are employed to the tops of the treads great difficulty will be experienced in execution, as each tread board must be fixed individually as the concreting of each step is completed ; in addition, the actual method of fixing will involve considerable additional labour

to the formwork to secure efficient support. A little experience in the placing of the concrete will soon indicate the correct method of handling the material, and no trouble will then be met with in this respect.

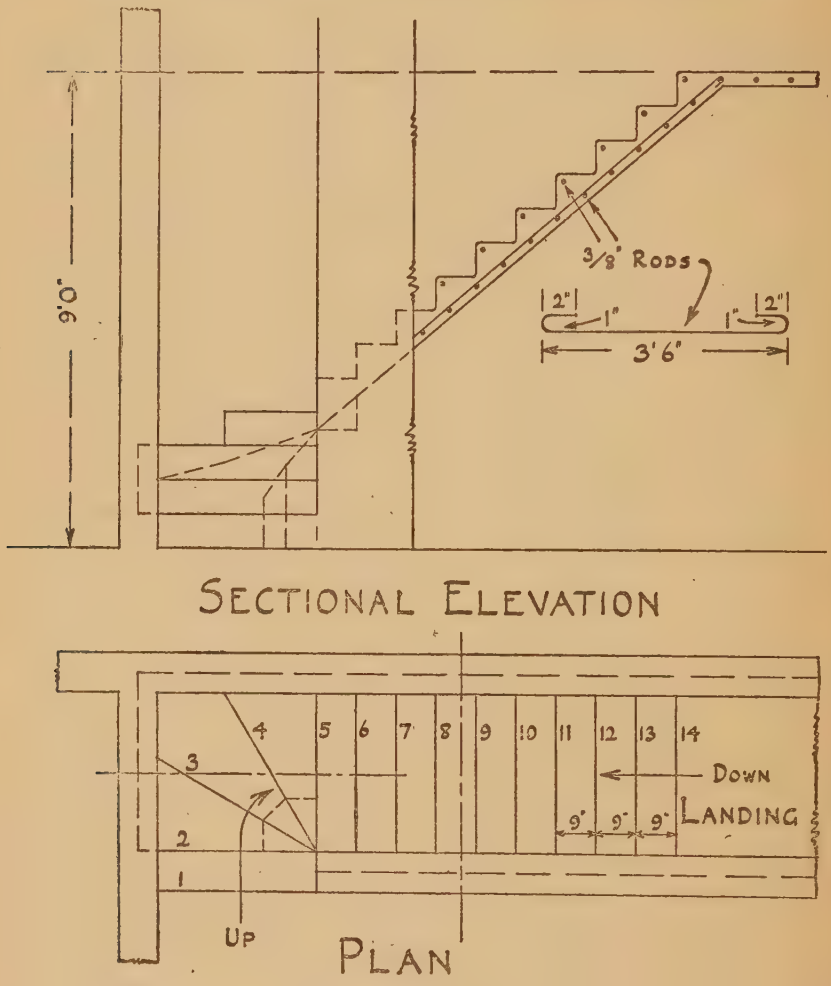

Fig. 37.—Type 4.

The method of bending and wiring the reinforcement is shown in *Fig.* 33.

Details of a staircase when support is provided at the top and bottom of each flight only, without the use of raking beams or strings, are given in *Figs.* 34 and 35, the latter being a schedule of the reinforcement required. This is an extremely simple type of stairs. The formwork required is of a plain character, as the treads finish against a plain board, and with

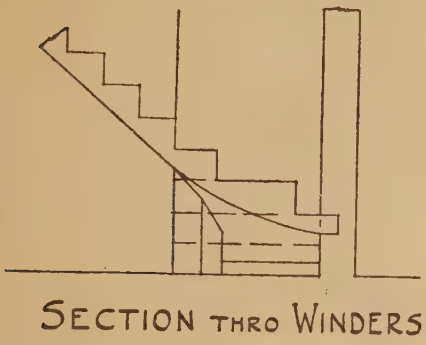

ROD	Nº OFF	LENGTH
A	2	2' 9"
B	2	2' 5"
C	2	2' 11"
D	1	3' 4"
E	1	3' 7"
F	1	3' 1"

2" 1" 3/8" ROD 2" 1"

REINFORCEMENT OF WINDERS

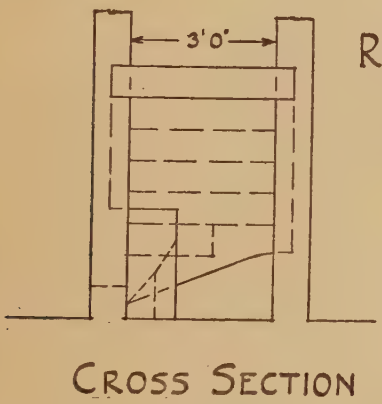



CROSS SECTION

Fig. 38.—Type 4.

plain boarding for the soffit and vertical boards for the riser faces the requirements are met.

A third type is illustrated in *Fig.* 36, consisting of one straight flight rising 9 ft. and built between two supporting walls. The plan and section given, together with the details of the reinforcement, are so simple that no further explanation or notice are necessary.

A type frequently met with in cottage work is that illustrated in

Figs. 37 and 38, consisting of a straight flight with winders at the bottom. The arrangement of the shuttering and the method of carrying the winders will depend on the circumstances of the case, but a simple method is that of providing a small block of concrete at the narrow end of the winder treads with radiating rods in each tread from this support to the bearing at the wide end of the step. In some instances a dwarf wall is built at the end of the straight portion of the flight, and the space under the winders can then be filled in with dry hardcore on which the concrete is laid with the use of vertical riser boards only.

Many other examples of reinforced concrete staircase work could be given, but these notes should be sufficient to enable the reader to execute the class of staircase required for small buildings in a satisfactory manner and understand the general principles that govern the design in this material.

CHAPTER VIII

Saw Tooth Roofs

THE object of these notes is to put before the reader the methods to be followed in the construction of roofs, where reinforced concrete is employed as the material for the trusses, in a manner which should enable the work to be executed at a reasonable cost without risk of failure. While large-span trusses of special form constructed with reinforced concrete are employed in large buildings, the adoption of this material will generally be found on a large scale in the saw-tooth type, or, as it is commonly known, the " north-light " roof, and the reason for this is not difficult to find. The north-light truss is practically universal for all modern factory buildings, particularly in the single-story type ; this class of structure is invariably designed to give a large number of equal bays with a uniform span, and thus repetition work is an important factor in the selection of the material to be employed.

Reinforced concrete is particularly suitable and economical in those buildings where repetition work is possible on a large scale as the form-work can be repeatedly used without alteration, and the use of up-to-date appliances for bending reinforcement, mixing and hoisting, and handling generally will be justified. Thus the labour costs will be reduced to a minimum.

It is, of course, quite feasible to employ reinforced concrete trusses for comparatively small buildings or for roofs having different spans, but generally speaking the maximum advantages of this material will be apparent in the scheme which provides for considerable repetition. One of the disadvantages of concrete trusses is the increased dead weight of the roof, but this is not serious as the additional strength required can be economically provided owing to the nature of the material used. Generally speaking, concrete trusses are used as pre-cast members, as the cost of manufacture is reduced by executing the concreting at the ground level and hoisting the complete member after it has sufficiently seasoned. In the case of the formwork this is quite a simple matter if

the complete truss is cast horizontally in the mould on a level platform, as all strutting and propping are eliminated. The actual placing of the concrete and reinforcement is also much easier if the work is done at the ground-level. In fact the casting of a roof truss at ground level is a job which can be undertaken by any contractor, whereas the construction of a reinforced concrete roof truss in position calls for considerable skill and experience in that class of work.

Method of Manufacture.

Assuming that the usual practice of pre-casting is adopted the methods to be followed are described in the subsequent notes.

A large level platform is formed by any convenient means, and this will generally be found possible by putting down some planking held together by battens or bearers on the underside and arranged to give a truly level surface on which to place the formwork for the first truss. The formwork is extremely simple, consisting of boards on edge which are cut and placed to give the outline of the truss and each member comprising the complete unit, as indicated in *Fig.* 39. The formwork is built up with a number of triangular units, each of which corresponds to the space enclosed by three adjacent members. These triangular units can be braced, strutted, or stiffened in any way required within the triangle without obstructing the placing of the reinforcement or concrete. The form is made slightly deeper than the thickness of the truss, say, 1 inch, in order to give a hold on the truss below when casting the second and subsequent trusses. The first truss is made the correct thickness by placing 1-in. boarding at the bottom of the form, and the boarding cut for this purpose can be prepared in the first instance and used as a template for the making of the forms. All boarding and formwork used should be wrot and treated with mould oil to prevent the concrete adhering to the timber. The sections of the mould are usually kept in position by small notched distance pieces, clamps, or straps attached to the top edges of the formwork after the reinforcement is placed and before concreting is commenced.

The necessary holes through the principal rafters for the attachment of purlins, etc., and through the tie beams for fixing shafting, bearings, or similar items, are provided by the insertion of pieces of gas barrel of the required internal diameter, cut to the exact distance between the opposite sides of the form ; these are held in position during concreting by a short length of rod or bolt passed through holes cut in the formwork (*Fig.* 39A). When the gas barrel is accurately cut and bolts are used, these act as ties during concreting and the formwork will be rigidly held without the necessity of the notched distance-pieces previously mentioned. The

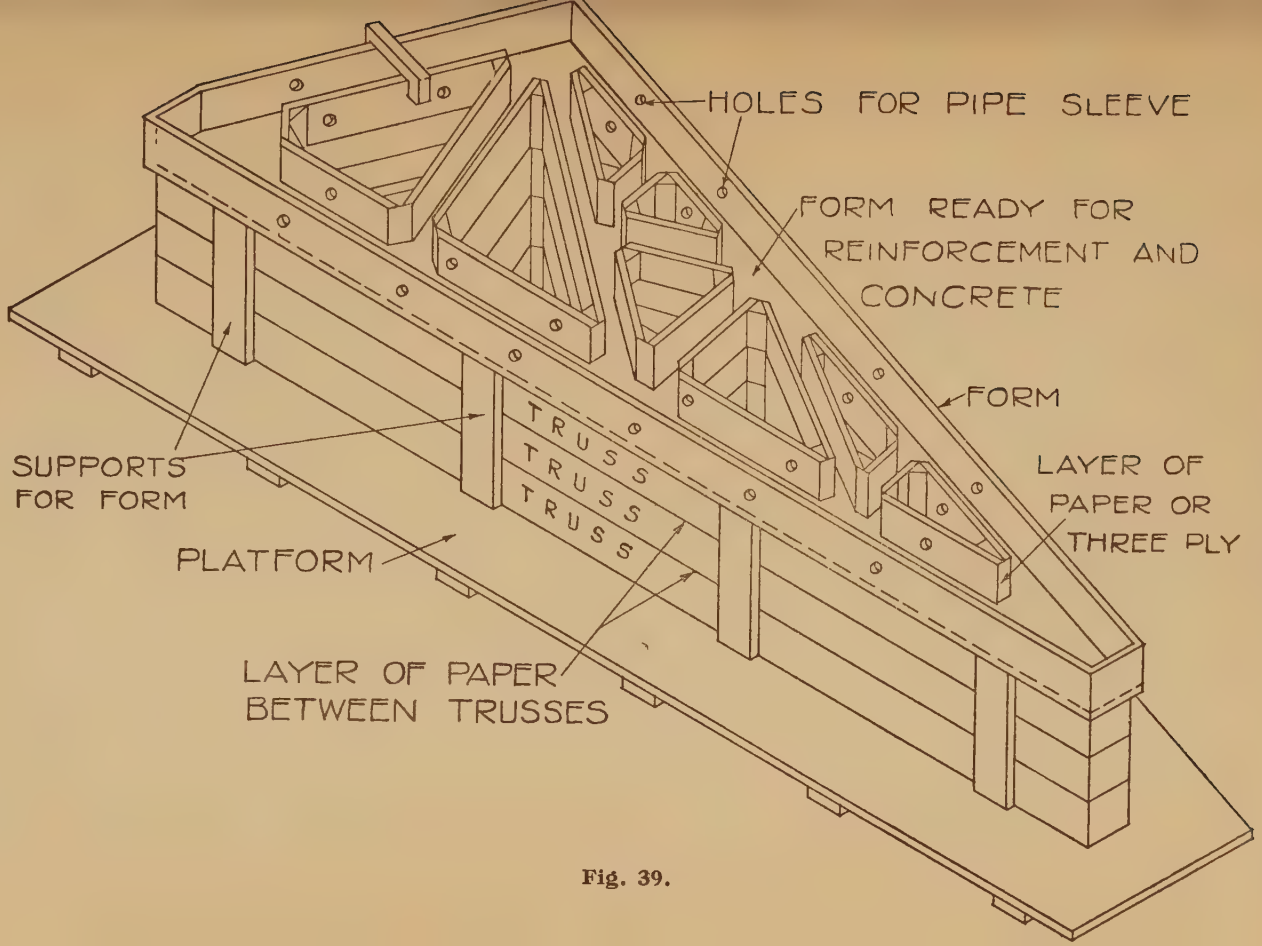
HOLES FOR PIPE SLEEVE
FORM READY FOR REINFORCEMENT AND CONCRETE
FORM
LAYER OF PAPER OR THREE PLY
TRUSS
TRUSS
TRUSS
SUPPORTS FOR FORM
PLATFORM
LAYER OF PAPER BETWEEN TRUSSES

Fig. 39.

withdrawal of the bolts when the concrete has hardened will leave the sleeve pieces in the concrete as a permanent protection to the holes, and allow for the attachment of other members to the truss without injury to the concrete.

When the formwork is ready to receive the concrete and the reinforcement is in position the placing of the concrete is commenced and the complete truss is concreted at one time without any break which would allow the material to harden partially at any point before the members of the truss are complete.

The material should be mixed with the correct volume of water to give a plastic mix and carefully tamped during the whole of the time the

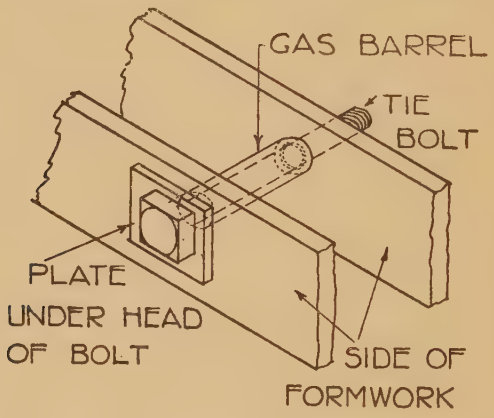

Fig. 39A.

concrete is being placed to ensure a dense material which is well worked around all the steel rods and links, and to avoid air pockets or bubbles which result in weak concrete and defective surfaces.

When the initial setting has taken place and while the concrete is green the bolts or ties can be slightly slackened to ease the formwork and allow easy removal when the next truss is to be made. The subsequent trusses are cast on top of the first truss by simply raising the formwork vertically the requisite amount as shown in *Fig.* 39, where it is indicated as being kept at the right level by supports of the correct lengths placed at intervals. The formwork, as previously mentioned, is of sufficient depth to overlap the truss below to keep the trusses uniform in size ; thus the under truss acts both as a guide to the formwork and as a base to the form. In order to prevent adhesion between the truss

already cast and the wet concrete to be placed for the next, the surface of the truss is covered with a layer of oiled paper, cut to the shape of the member and placed in the form before the reinforcement is put in position.

The process of concreting and raising the form is continued until a stack is built up to a height at which further work becomes comparatively uneconomical owing to the expense of hoisting and placing materials several feet above ground level. This level will generally be not more than about 5 ft. ; when this is reached the formwork is removed to a new platform and another stack is built up, and so on until all trusses are cast.

Each stack will therefore consist of five or six trusses one above the other with a layer of oiled paper between, and they can be left to mature as long as necessary. These stacks can be distributed at any convenient points to reduce handling and transportation when hoisting and erection is being carried out.

Reinforcement.

The preparation and assembly of the reinforcement is an important feature in making the trusses ; great accuracy is necessary to ensure the steel being in the correct position in the formwork, and it must be firmly held in position during concreting. Owing to the large amount of repetition work it is advisable to make up one complete set of rods for one truss which can be tried in the formwork after it has been assembled and wired together, and when this is found to be correct it can be used as a pattern for all the remaining work. This sample set is advisable even when careful and complete drawings are supplied, as an error in making up a large number of sets will involve waste of money and time.

Generally speaking, each member of a roof truss will contain at least four rods as main reinforcement, and these will be held together by links at intervals. It is therefore quite a simple matter to build up the rods and wires into a cage-like shape, and by the use of some thin tie wire the complete set for each member can be held together and handled as one unit. The junction of the rods in the adjacent members can be completed when the reinforcement is being placed in the forms if the rods are all correctly bent and hooked to avoid any work other than the actual placing and wiring together when the assembly is being done.

Typical illustrations of the reinforcement for different members built up ready for placing in the forms are given in *Figs.* 40, 41 and 42.

Handling Trusses.

When the trusses are sufficiently seasoned and erection is commenced the question of handling and hoisting must be considered ; this matter

is important if damage to the concrete is to be avoided and erection costs kept down. The average weight of a truss having a 20-ft. span will be 19 cwts., and for a 30-ft. span about 59 cwts. Generally speaking, a travelling crane which can take the truss off the stack and travel to the

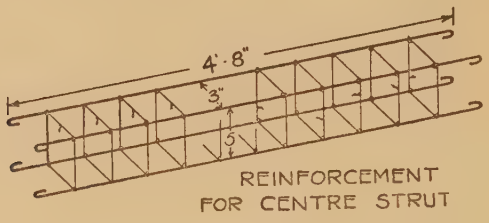

Fig. 40.

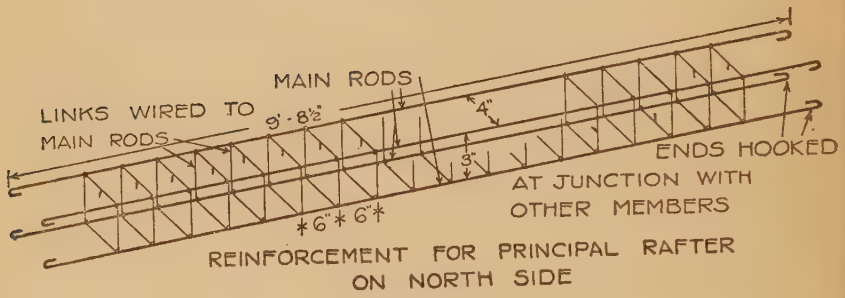

Fig. 41.

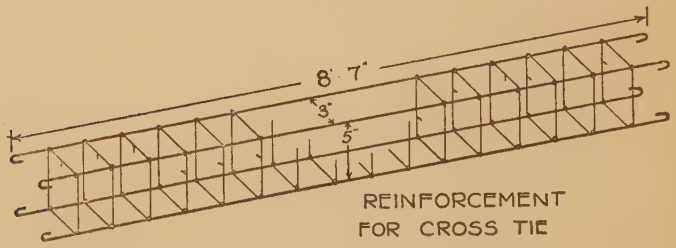

Fig. 42.

point of erection and handle directly into position is the most convenient and expeditious. The trusses can, of course, be lifted by means of a pole, pulleys, and hand winch if other plant is not available.

It will facilitate handling considerably if the sling for hoisting is

placed in the correct position at the outset. The truss when being raised should have the main tie beam horizontal, and the whole member should be evenly balanced on each side of the sling. In order to achieve this the sling should be placed around the main or principal rafter on a line drawn through the centre of gravity of the whole truss. In order to assist the contractor to deal with this point the correct position has been determined for the 20-ft. and 30-ft. spans, and *Figs.* 43, 44 and 45 show where the sling should be attached to give a properly balanced lift.

When the truss is being lifted from the stack it is necessary to raise

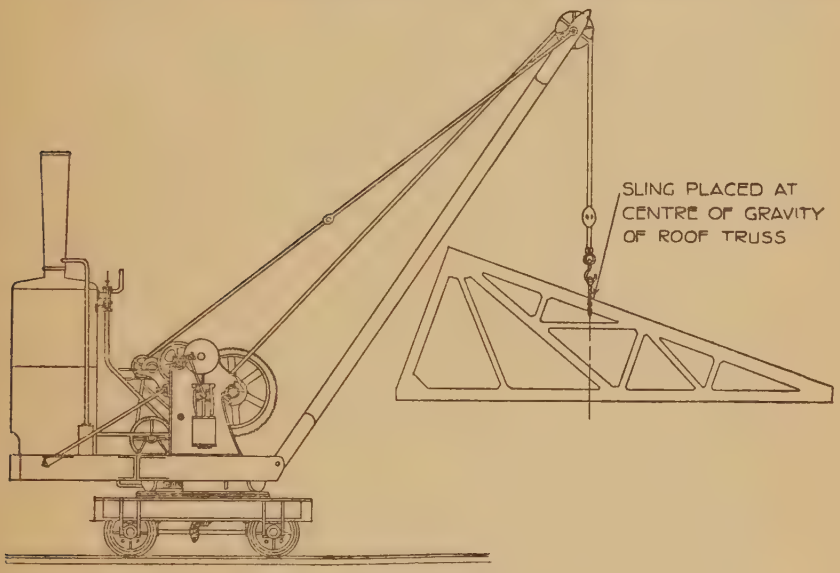

Fig. 43.

it off the truss below sufficiently high to allow the sling to be passed round the principal rafter; this is usually done by passing a bolt through one of the holes left in this member for attachment of lifting tackle, and the truss is wedged and packed up to avoid undue strain while this is being done. The method of handling, hoisting, and erecting generally will be one that can be carried out to suit the circumstances in any particular case, and no further comments are necessary except that it will be worth while taking a few special precautions to prevent damage to the trusses. If the trusses are inclined to be in any degree insufficiently seasoned, or there is any risk in handling owing to awkward working conditions, it is advisable to lash a pole on one or both sides of the truss

during hoisting and erection to make the members assist one another, to prevent damage by accidental blows, and avoid any tendency to "whip" sideways when swinging the truss round to the correct position.

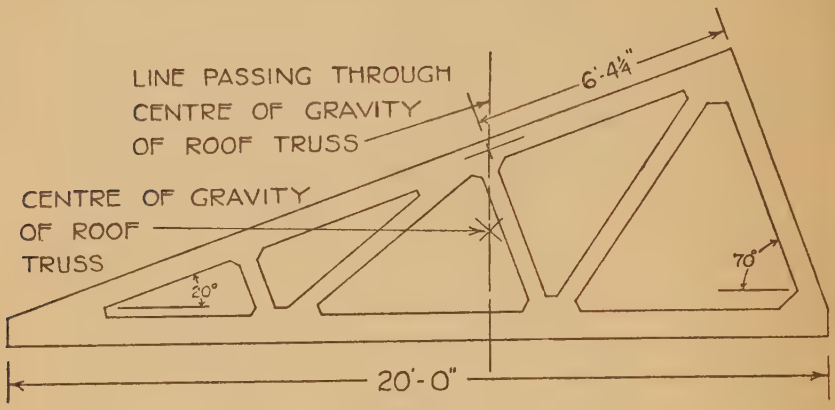

Fig. 44.

Design of Trusses.

It is not proposed to deal in detail with the calculations and designing of reinforced concrete roof trusses, but a few general notes may be given as a guide.

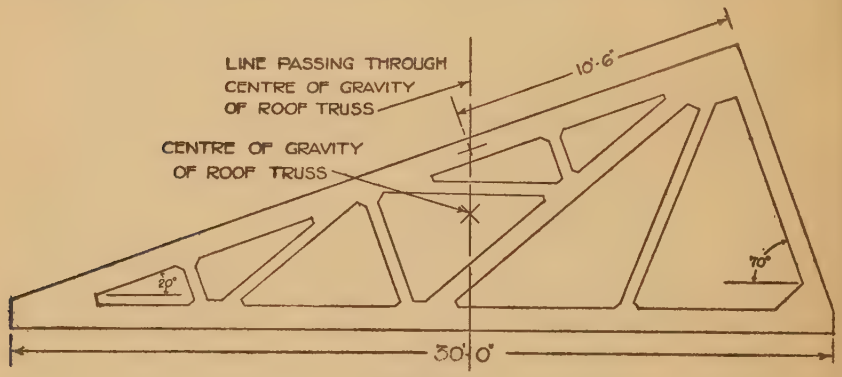

Fig. 45.

The design of the truss will depend on two main factors, viz. (*a*) the span and (*b*) the loads. The first mentioned will be determined by the general plan of the building and the considerations of economical design,

and need not be further considered here except to mention that 20 ft. is usually adopted for small buildings, and 30 ft. is adopted for larger buildings or where it is necessary to reduce the supporting columns or piers to the minimum number.

Loads will consist of

(1) The dead load of the roof itself, including the trusses, purlins, and roof covering;

(2) Wind pressure, which will include the necessary allowance for any superimposed external load such as snow.

(3) An allowance for any loads caused by the attachment of shafting, conveyors, motors, or any equipment to be supported by the trusses when the building is in use.

In arriving at the allowances for these loads the designer will endeavour to work to the minimum figure sufficient to meet the circumstances. This does not imply that any risks should be taken or that insufficient material should be justified on the grounds of economy, but it is important that only material really required is provided, and the designer must base his design on sound scientific lines.

In the particulars given herein the loads have been based on the following figures:

(1) The dead load is taken at 50 lbs. per ft. super, and this figure will provide for a covering of asphalt on the reinforced concrete slab.

(2) The wind pressure provided for equals an allowance of 18 lbs. per ft. super measured at right angles to the slope.

(3) An allowance of 5 cwts. on each truss considered as a hanging load on the tie beam at any point; this should be sufficient to provide for shafting or any ordinary load likely to be applied to one truss.

In the case of factory roofs it is extremely important to make some provision for a load on the tie-beam, even when this is not specially asked for by the building owner, because it may not be realised by him that loads will be applied in this way; such loads may not be necessary at the outset, but developments and changes in machinery, shafting, or other equipment may be required at a later date and it is wise to make provision for a reasonable contingency of this kind.

Special cases may occur in which exceptional loads or conditions have to be dealt with and in such cases special trusses must be designed, and the particulars here given would not be applicable as the examples given are only intended to cover the ordinary or usual type of buildings where the north-light truss is suitable.

The method of supporting the ends of the trusses will vary according to the circumstances, and no definite details can be given which will necessarily cover all cases. In the building where only one bay in width

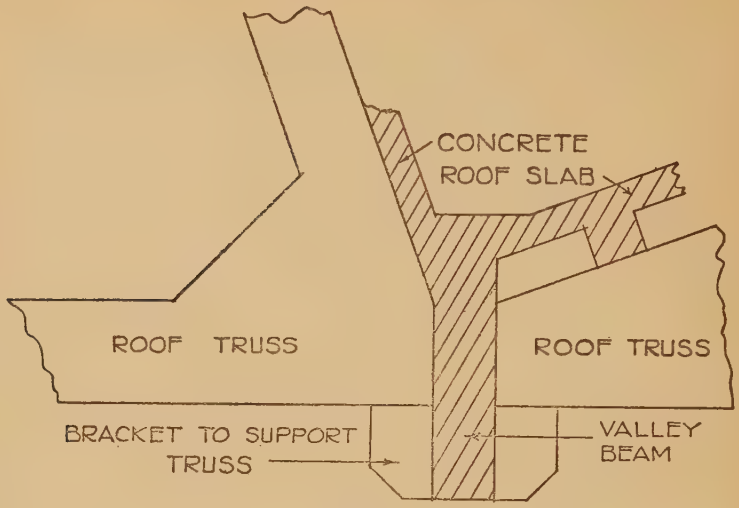
CONCRETE
ROOF SLAB
ROOF TRUSS
ROOF TRUSS
BRACKET TO SUPPORT
TRUSS
VALLEY
BEAM

Fig. 46.

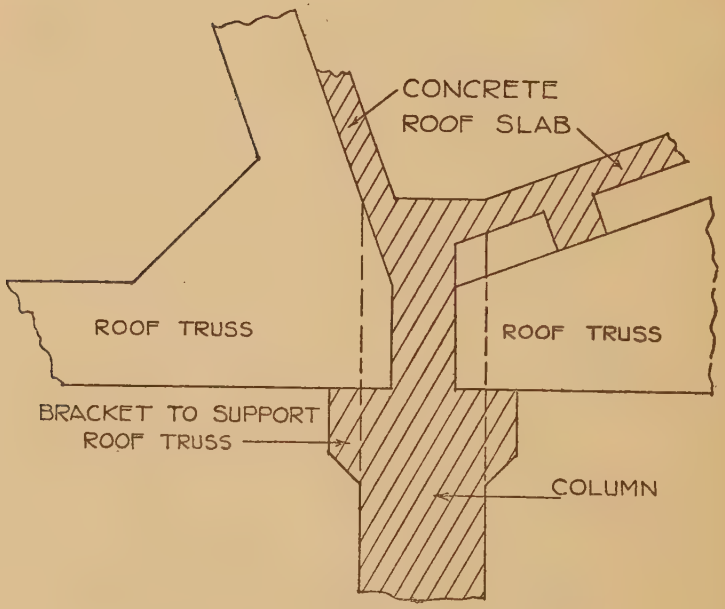
CONCRETE
ROOF SLAB
ROOF TRUSS
ROOF TRUSS
BRACKET TO SUPPORT
ROOF TRUSS
COLUMN

Fig. 47.

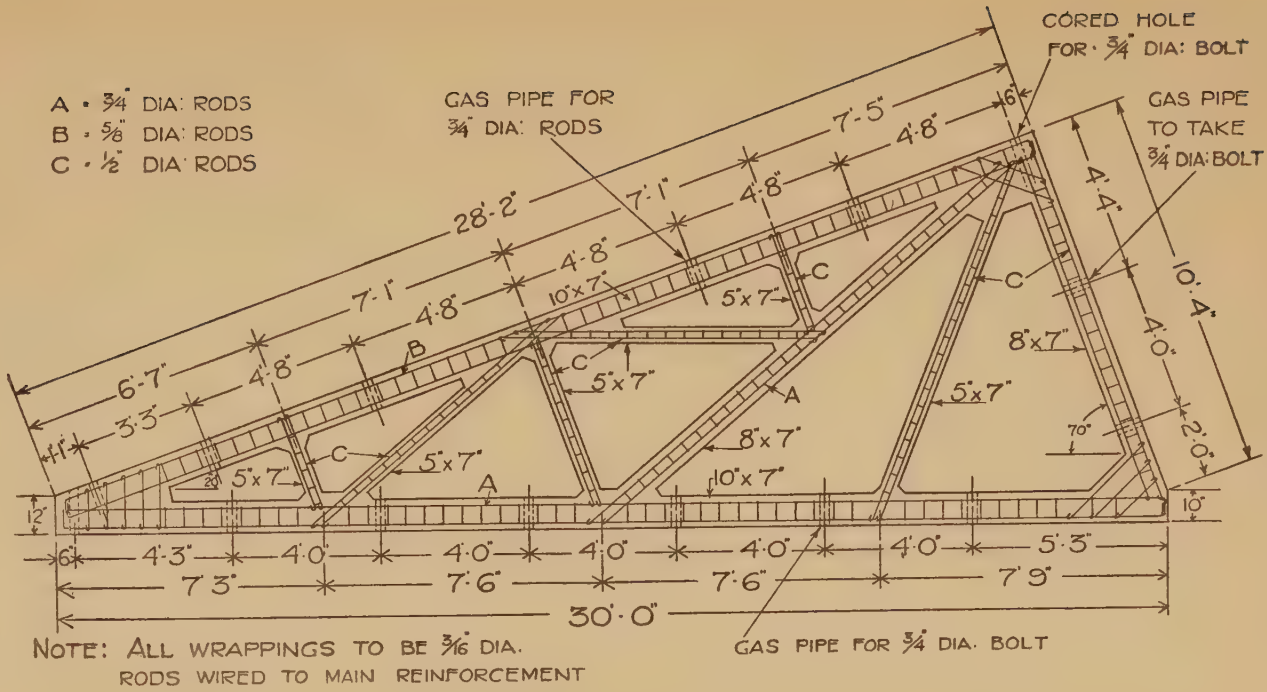
A = ¾" DIA. RODS
B = ⅝" DIA. RODS
C = ½" DIA. RODS
GAS PIPE FOR ¾" DIA. RODS
CORED HOLE FOR ¾" DIA. BOLT
GAS PIPE TO TAKE ¾" DIA. BOLT
28'-2"
7'-1"
4'-8"
7'-5"
6"
4'-4"
10'-4"
4'-0"
2'-0"
6'-7"
3'-3"
1'-1"
10"x7"
5"x7"
8"x7"
70°
12"
10"
6"
4'-3"
4'-0"
5'-3"
7'-3"
7'-6"
7'-9"
30'-0"
NOTE: ALL WRAPPINGS TO BE 3/16" DIA. RODS WIRED TO MAIN REINFORCEMENT
GAS PIPE FOR ¾" DIA. BOLT

Fig. 48.

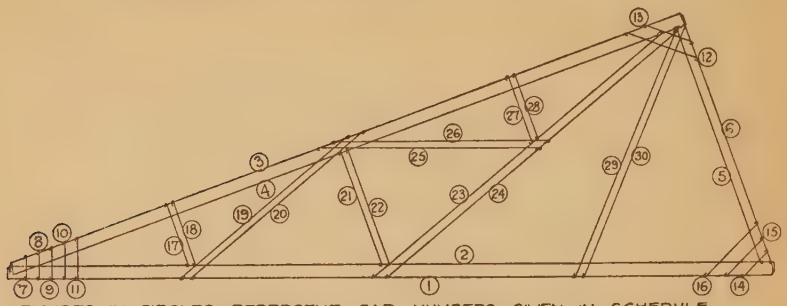

FIGURES IN CIRCLES REPRESENT BAR NUMBERS GIVEN IN SCHEDULE.

Fig. 49.

SCHEDULE OF RODS

BAR No.	DIA.	LENGTH	SHAPE	No. OFF	TOTAL LENGTH	TOTAL WT.
1 & 2	¾"	30'-5½"	5" — 29'-7½" — 5"	4	121'-10"	183 lbs
3	⅝"	28'-7"	27'-8½" — 5"	2	57'-2"	57 "
4	⅝"	28'-10"	2"-5½" — 27'-11½" — 5"	2	57'-8"	58 "
5 & 6	½"	11'-0½"	6" — 9'-8½" — 6"	4	44'-2"	30½ "
7	½"	1'-7¾"	3" — 10" — 3"	2	3'-3½"	2½ "
8	½"	1'-10¼"	1'-0½"	2	3'-8½"	3 "
9	½"	2'-0¼"	1'-2½"	2	4'-0½"	3 "
10	½"	2'-2¾"	1'-5	2	4'-5½"	3 "
11	½"	2'-4¾"	1'-7	2	4'-9½"	3½ "
12	½"	3'-8¾"	2'-11"	2	7'-5½"	5¼ "
13	½"	2'-7¾"	1'-10"	2	5'-3½"	3½ "
14	½"	2'-0¾"	1'-3"	2	4'-1½"	3 "
15	½"	2'-8¾"	1'-11"	2	5'-5½"	3½ "
16	½"	3'-6¾"	2'-9"	2	7'-1½"	5¼ "
17	½"	3'-6¼"	4" — 2'-6½" — 4"	2	7'-0½"	5¼ "
18	½"	3'-7¼"	2'-7½"	2	7'-2½"	5¼ "
19	½"	9'-5¾"	8'-6"	2	18'-11½"	13 "
20	½"	9'-10¼"	8'-10½"	2	19'-8½"	14 "
21	½"	5'-6¾"	4'-7"	2	11'-1½"	7½ "
22	½"	5'-8¼"	4'-8½"	2	11'-4½"	7½ "
23	¾"	15'-7¼"	14'-7½"	2	31'-2½"	46½ "
24	¾"	15'-5¼"	14'-5½"	2	30'-10½"	46½ "
25	½"	9'-6¾"	8'-7"	2	19'-1½"	13 "
26	½"	9'-4¼"	8'-4½"	2	18'-8½"	13 "
27	½"	3'-8¼"	2'-8½"	2	7'-4½"	5¼ "
28	½"	3'-8¼"	2'-8½"	2	7'-4½"	5¼ "
29	½"	11'-3¾"	10'-4"	2	22'-7½"	15 "
30	½"	11'-3¾"	10'-4"	2	22'-7½"	15 "

Fig. 50.

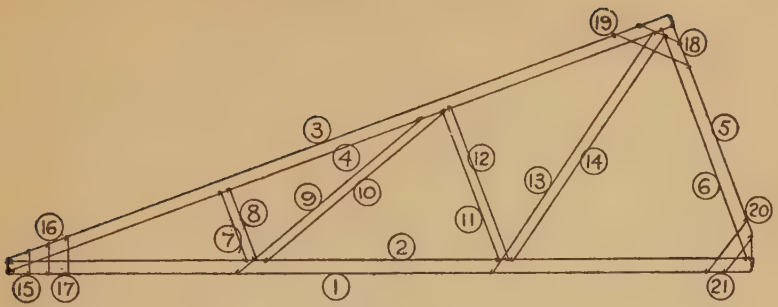

FIGURES IN CIRCLES REPRESENT BAR NUMBERS GIVEN IN SCHEDULE.

Fig. 51.

SCHEDULE OF RODS

BAR No.	DIA.	LENGTH	SHAPE	No OFF	TOTAL LENGTH	TOTAL WT.
1	5/8"	20' 5"	6" 19'-8" 3"	2	40' 10"	50lbs
2	5/8"	20' 5½"	19 8 5/8" 4" 3"	2	40'-11"	50 "
3	½"	19'-5"	18' 8½" 4" 3"	2	38'-10"	27 "
4	½"	19' 7"	4" 3" 18'-10 5/8"	2	39'-2"	27 "
5	½"	7' 7"	5'-10" 9" 4"	2	15'-2"	10½ "
6	½"	7' 5½"	6' 5½" 4" 4"	2	14'-11"	10½ "
7 & 8	½"	2' 8"	3" 3" 1' 11"	4	10'-8"	7½ "
9	½"	7' 2"	6'-5½"	2	14'-4"	10 "
10	½"	6' 10"	6'-1"	2	13'-8"	10 "
11 & 12	½"	4' 10½"	4'-2"	4	19'-6"	13 "
13	½"	8' 4"	7'-7½"	2	16'-8"	11½ "
14	½"	7' 11"	7'-2½"	2	15'-10"	11 "
15	½"	1'-4"	7½"	2	2'-8"	2 "
16	½"	1'-6"	9½"	2	3'-0"	2 "
17	½"	1'-8"	11½"	2	3'-4"	2¼ "
18	½"	1' 10"	1'-1½"	2	3'-8"	2½ "
19	½"	2' 10½"	2'-2"	2	5'-9"	3½ "
20	½"	2'-4½"	1' 8"	2	4'-9"	3 "
21	½"	1'-9½"	1'-1"	2	3'-7"	2½ "

Fig. 52.

is required the trusses can be carried on the walls at each end, but in buildings over one bay in width one end of the truss must be supported by a valley beam or column. The method of connection will depend on whether the valley beam or column is pre-cast or cast *in situ*, and to some extent on the type of gutter and roof covering employed. Some typical details which can be used for ordinary cases are illustrated in *Figs.* 46 and 47.

It is a simple matter to cast the trusses with some of the rods left projecting from the ends of the tee beams where it is necessary to incorporate the truss with an *in situ* column or valley beam, as the insertion of some pieces of timber in the end of the form fitting around the rods and

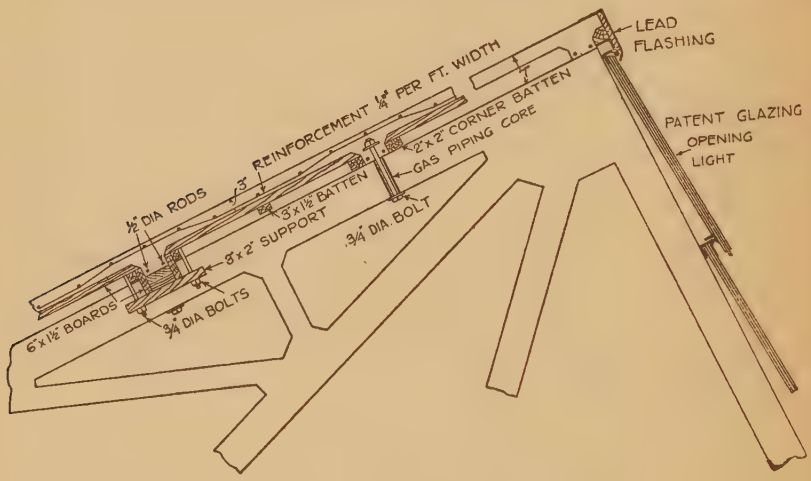

Fig. 53.

preventing the concrete from being filled into the form for the required distance from the end will present no difficulty and mean very little expenditure.

A detail of the reinforcement for a 30-ft. span truss is given in *Fig.* 48, and diagrams and schedules for all the rods in a truss of this type and span are given in *Figs.* 49 and 50, while similar information for a truss having a span of 20 ft. is given in *Figs.* 51 and 52.

The attachment of the purlins to the trusses can be effected in an efficient manner by leaving holes in the main rafters through which bolts can be passed, and these bolts can be used for fixing the purlins directly to the rafters or for the attachment of cleats to which the purlins

are applied. The holes for these bolts should be formed in the main rafters by the use of gas barrel sleeves, as previously described, to prevent damage to the concrete. The fixing of the purlins is illustrated in the diagrams (*Figs.* 53 and 54) and no further description is necessary, especially as this is a matter which can be solved by the contractor in the case of the particular details given not being applicable in any instance.

The method and material to be used for the roof covering, the question

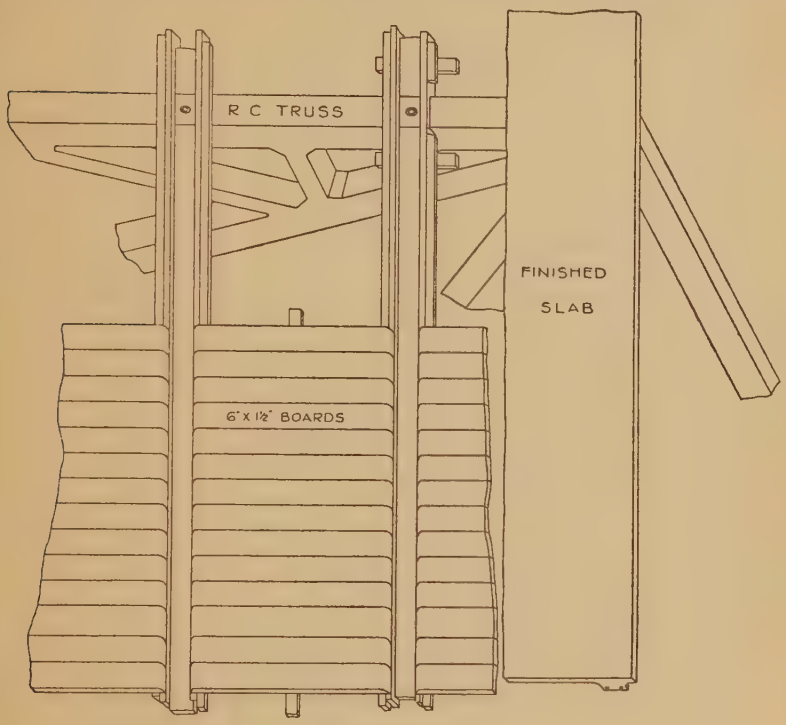

Fig. 54.

of opening roof lights, and many similar items will depend on circumstances, and no definite rules can be laid down in these notes, which are intended to apply primarily to the work of constructing reinforced concrete north-light trusses and the principles described for this work apply to all work apart from the covering used.

In conclusion it may be stated that the most important point in connection with reinforced concrete roof truss construction is that the quality of the work should at all times be of the highest.

CHAPTER IX

Water Tanks

Tanks above Ground Level.

THE following designs are suitable for tanks holding up to 6 ft. depth of water at or about the temperature of the air.

The tanks may be of any convenient shape and of any size up to a side of, say, 50 ft., but not less than 6 ft. Such tanks fall under two heads, namely, those above ground and those below. Each is an entirely different structure from the other from the design, and therefore the constructional, points of view. The former type will be described in detail before passing on to underground tanks ; in both cases, however, they are considered as open or uncovered, as the addition of a roof again modifies the design.

Tanks at or above ground level can be dealt with in the manner shown in *Figs.* 55 and 56. An important assumption must here be made, namely, that the ground at the level of the underside of the floor is of a reliable and consistent nature over the whole area of the tank, and is capable of withstanding safely a pressure of at least 1 ton per sq. ft. If there is the slightest uncertainty about this the ground should be excavated until a reliable stratum is reached and the excavation filled and levelled up with 1 : 3 : 6 concrete to the underside of the floor.

If the circumstances admit of the floor being lowered this may be done up to 1 ft. or so below ground level, in order to save the mass concrete, but it would also be essential to drop the top of the tank walls by a like amount so as not to exceed the 6 ft. maximum depth of water.

On the other hand, if it is desired to raise the tank a foot or two above ground, this may be effected by making up beneath with mass concrete as above ; but this concrete must be continuous over the whole site, as the floor illustrated is only sufficiently reinforced for a continuous bearing and would not span over gaps or openings as a suspended floor.

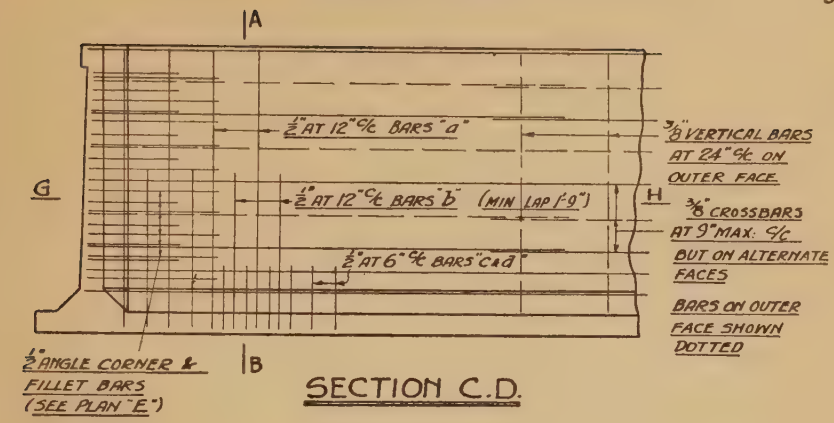
A
B
G
H
½" AT 12" C/C BARS "a"
½" AT 12" C/C BARS "b" (MIN LAP 1'-0")
½" AT 6" C/C BARS "c & d"
⅜" VERTICAL BARS AT 24" C/C ON OUTER FACE
⅜" CROSSBARS AT 9" MAX. C/C BUT ON ALTERNATE FACES
BARS ON OUTER FACE SHOWN DOTTED
½" ANGLE CORNER & FILLET BARS (SEE PLAN "E")

SECTION C.D.

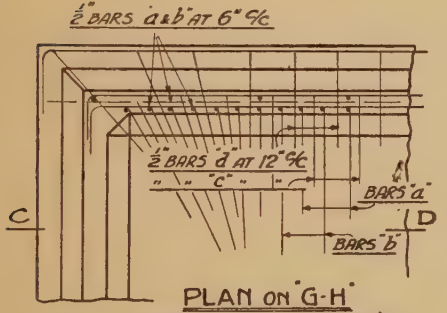

PLAN ON "G-H"
(SHOWING WALL BARS)

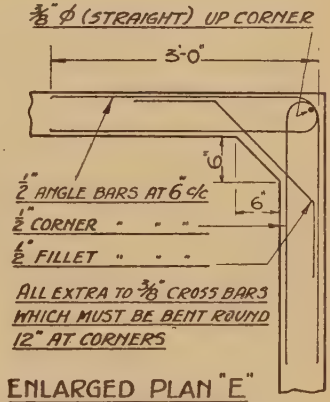
⅜" ϕ (STRAIGHT) UP CORNER
3'-0"
½" ANGLE BARS AT 6" C/C
½" CORNER " " "
½" FILLET " " "
6"
6"
ALL EXTRA TO ⅜" CROSS BARS WHICH MUST BE BENT ROUND 12" AT CORNERS

ENLARGED PLAN "E"
THROUGH CORNER

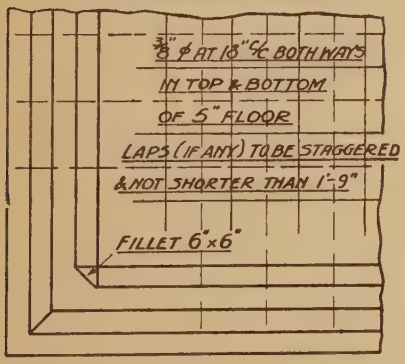



BARS IN BOTTOM SHOWN DOTTED

PLAN SHOWING FLOOR BARS

SCALE - 12" 6" 0 1' 2' 3' 4'

Fig. 55.

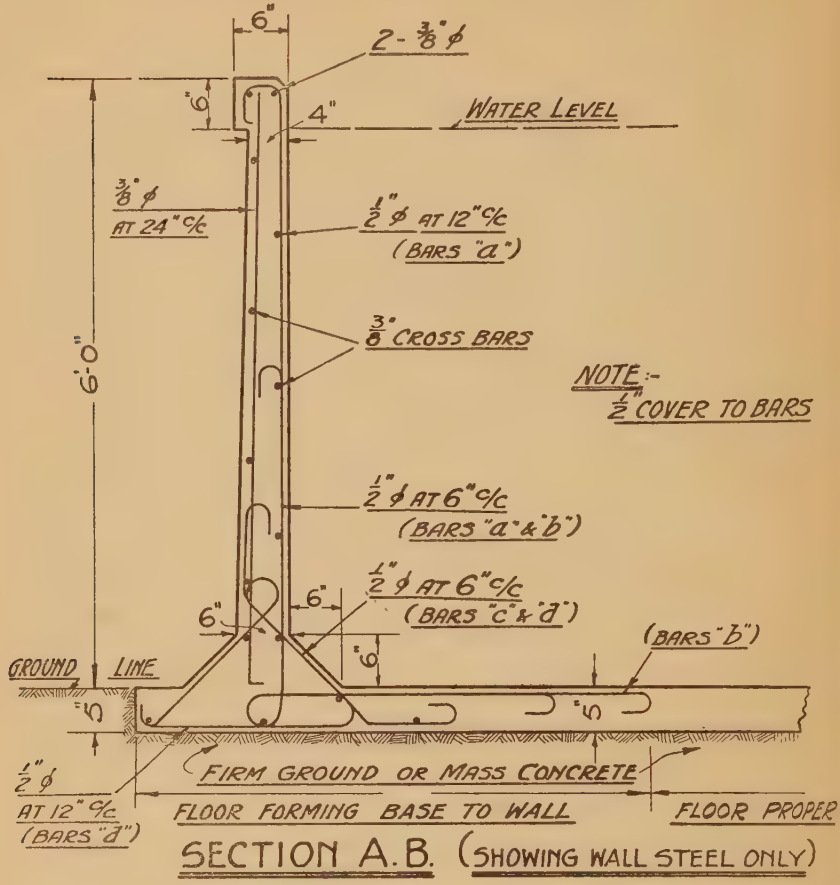

SECTION A.B. (SHOWING WALL STEEL ONLY)



PART SECTION A.B. (SHOWING FLOOR STEEL ONLY)

Scale - 12" 6" 0 12"

Fig. 56.

Floor.

This consists of a 5-in. slab reinforced with $\frac{3}{8}$-in. bars at 18-in. centres both ways (at right angles) in the top and in the bottom of the slab. The bars should be wired together at their crossings into a mesh, and those nearest the surfaces given $\frac{1}{2}$ in. cover of concrete.

The upper layer is retained in position by small concrete blocks or metal spacers, which are moved along or taken out as the concreting of the floor proceeds. The lower layer can be supported on $\frac{1}{2}$-in. bars similarly moved along, or smaller mortar or concrete blocks.

If the floor is laid direct on ground and the latter is at all liable to work up into a slurry or mud, it is always desirable to cover the whole site with 2 inches of 1 : 3 : 6 concrete to form a firm working surface which will keep the reinforcement clean and prevent water from draining out of the floor concrete.

Concreting should be started at one end (outside the wall) and must be deposited for its full 5-in. thickness, well spaded and tamped, screeded to levels, and carried through to an approximately vertical joint at the end of each day's work.

The bars entering the floor from the wall (i.e. bars "a," "b," "c," and "d") must, of course, be placed and fixed before concreting commences.

In order to arrive at the lengths of the crossbars, set out the plan to scale, draw on the bars, beginning them where shown on Section AB. Arrange the laps (not to be shorter than 1 ft. 9 in.) so that they are staggered; that is, so that they "hit and miss" and do not all occur along any one section or line across the floor.

The fewer the laps and the longer the bars (up to, say, 25 ft.) the better, for economy in steel and from the point of view of strength.

In large tanks a fall will probably be required to the floor. This may be achieved by sloping the floor, say, 1 in. in 10 ft., upwards from the sump or lower end, or by screeding after a level floor has set.

A board, staked vertically, will be required around the perimeter of the floor as formwork.

Walls.

The shuttering for the wall must be rigid and self-supporting, and must be provided with loose boards on the outside so that concreting and tamping may be carried up in 1-ft. lifts.

The reinforcement as shown on the drawings must be carefully bent, placed, and securely wired and held so that it is not forced out of place

during the pouring and ramming, particularly with regard to the ½-in. cover of concrete on each face. The notes relative to crossbars given under "floor" also apply here, and the two meshes should be separated by spacers made of small-diameter bars hooked or turned at their ends.

The wall indicated in *Fig.* 56 tapers from 6 in. thick at the bottom to 4 in. at the top. It may, of course, be made 6 in. thick all the way up, which simplifies the shuttering and its setting up at the expense of a little more concrete. The coping, projecting 2 in., should, however, be maintained from the point of view of appearance.

Special care must be exercised at the corners to ensure that the extra bars shown in plan E are concreted in correctly. The crossbars in the walls must also be turned round 12 in. on the outer face of the adjoining wall at the corners.

The horizontal portions of the wall bars may be gradually turned to radiate into the floor (as shown on plan GH) in order to avoid two sets overlapping.

Quantities.

To enable the quantities to be ascertained for tanks of any size or shape, these are given

(1) per square yard of floor,
(2) per linear yard of wall.

These amounts have only to be worked out for any particular case and multiplied by the following figures. *N.B.*—That area considered as Floor extends only from 5 ft. from the outer edges of the floor (i.e. from where the wall bars in the floor are stopped and hooked). Thus, if the ends of the floor were 20 ft. apart the area of floor would be computed as 10 ft. (20 ft. less two 5-ft. wall bases). The balance of the floor forms the wall base, and must be so considered from the point of view of quantities because it contains a heavier proportion of reinforcement.

FLOOR (*per yard super*) :—

Shuttering—5-in. board round perimeter, staked.	
Concrete—9 sq. ft. 5 in. thick	3·75 cu. ft.
Reinforcement—⅜-in. bars at 18-in. centres both ways, in top and bottom, straight, including a reasonable amount for laps . .	10 lbs.

WALL (*per linear yard*) :—

Shuttering—38 ft. super (both sides measured). Add for posts, struts and cutting

			cu. ft.
Concrete—Wall base (or floor)	15 sq. ft.	5 in. thick .	6·25
Fillets	6 lin. ft.	6 in. by 6 in.	0·75
Wall	18 sq. ft.	5 in. av. .	7·50
Coping	3 lin. ft.	6 in. by 2 in.	·25
			14·75

Reinforcement—approx. 83 lbs.

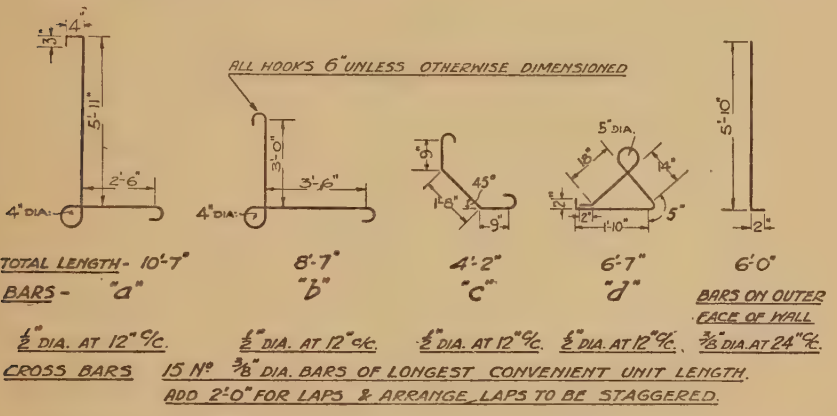
ALL HOOKS 6" UNLESS OTHERWISE DIMENSIONED
4" DIA.
5'-11"
2'-6"
3'-0"
3'-6"
9"
45°
1'-8"
9"
5" DIA.
1'-10"
5"
5'-10"
2"
TOTAL LENGTH - 10'-7" 8'-7" 4'-2" 6'-7" 6'-0"
BARS - "a" "b" "c" "d"
BARS ON OUTER FACE OF WALL
½" DIA. AT 12" C/C. ½" DIA. AT 12" C/C. ½" DIA. AT 12" C/C. ½" DIA. AT 12" C/C. ⅜" DIA. AT 24" C/C.
CROSS BARS 15 Nº ⅜" DIA. BARS OF LONGEST CONVENIENT UNIT LENGTH.
ADD 2'-0" FOR LAPS & ARRANGE LAPS TO BE STAGGERED.

Special Note.—This design is based on the standard mix of 1 : 2 : 4 for the concrete, although a little richer mix may be used if desired.

In view of the fact that the concrete must be watertight, special care must be taken during mixing, placing, and punning, to produce a dense concrete. Joints must be well cleaned and grouted before the next day's concreting begins. With reasonable care the thicknesses given should be perfectly watertight, although slight seepage may take place when the tank is first filled. This, however, should "take up" in the course of a day or so.

The tank must not be filled for five or six weeks after the last pouring (if ordinary Portland cement is used) and the first filling should be gradual, extending over a day or two for fairly large tanks.

Tanks below Ground Level.

Any tank where the ground line occurs more than 1 ft. above the level of the floor, or where earth or filling is to be tipped against the outside of the walls, will be termed, and must be treated as, an underground tank. It will be readily appreciated that this introduces another condition into the design, namely, the walls must act as retaining walls when the tank is empty in addition to holding the water when full.

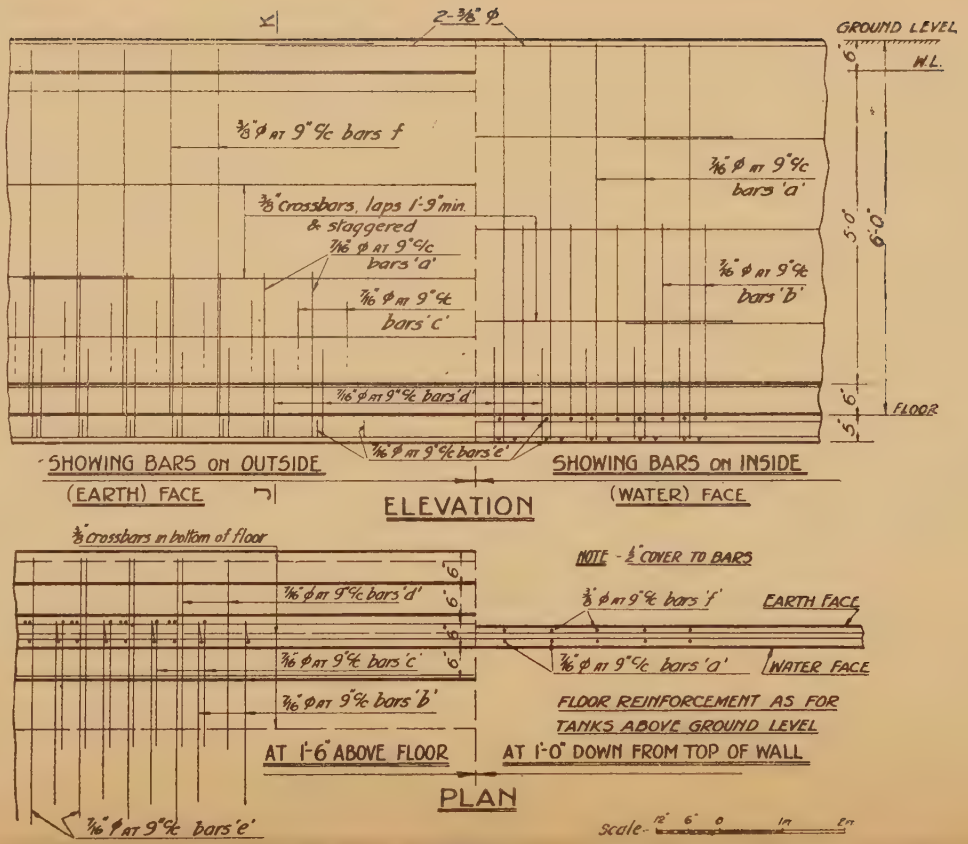
2-⅜" ϕ
GROUND LEVEL
W.L.
⅜" ϕ AT 9" c/c bars f
7/16" ϕ AT 9" c/c bars 'a'
⅜" crossbars, laps 1'-9" min. & staggered
7/16" ϕ AT 9" c/c bars 'a'
7/16" ϕ AT 9" c/c bars 'b'
7/16" ϕ AT 9" c/c bars 'c'
7/16" ϕ AT 9" c/c bars 'd'
7/16" ϕ AT 9" c/c bars 'e'
5'-0"
6'-0"
5'-6"
FLOOR
SHOWING BARS ON OUTSIDE (EARTH) FACE
SHOWING BARS ON INSIDE (WATER) FACE
ELEVATION
⅜" crossbars in bottom of floor
7/16" ϕ AT 9" c/c bars 'd'
7/16" ϕ AT 9" c/c bars 'c'
7/16" ϕ AT 9" c/c bars 'b'
7/16" ϕ AT 9" c/c bars 'e'
AT 1'-6" ABOVE FLOOR
NOTE - 1½" COVER TO BARS
⅜" ϕ AT 9" c/c bars 'f'
EARTH FACE
7/16" ϕ AT 9" c/c bars 'a'
WATER FACE
FLOOR REINFORCEMENT AS FOR TANKS ABOVE GROUND LEVEL
AT 1'-0" DOWN FROM TOP OF WALL
PLAN
Scale- 12" 6" 0 1m 2m

Fig. 57.

In the following design it is assumed that the ground is not water-logged. Should the latter be found to be the case a special heavier design would be required, otherwise the floor may blow in or the whole tank float and rise bodily in the ground.

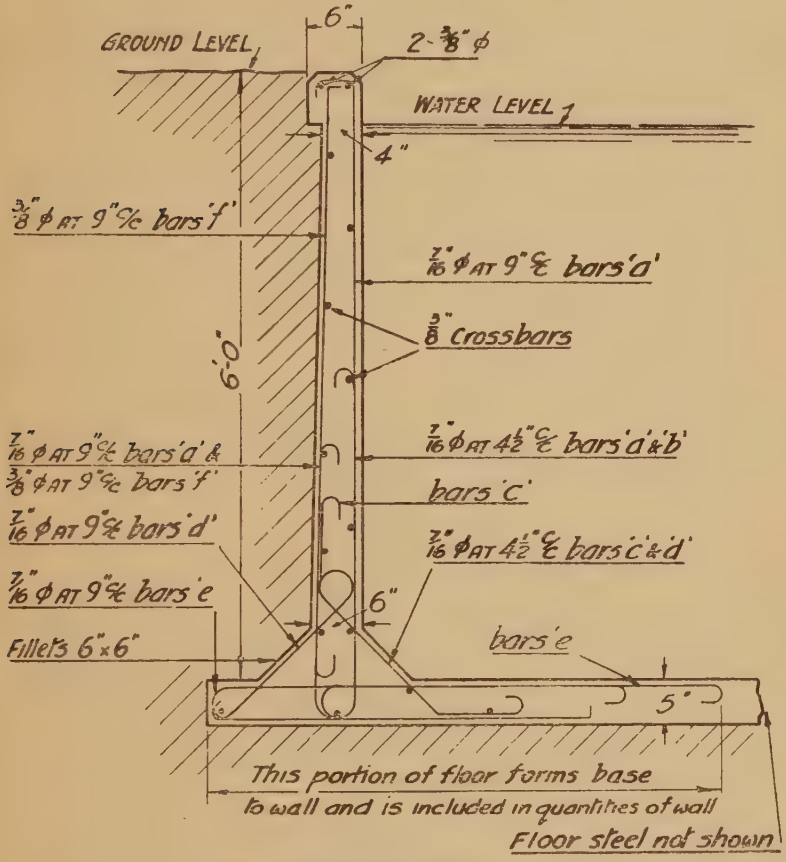
GROUND LEVEL
6"
2-⅜" ϕ
WATER LEVEL
4"
⅜" ϕ AT 9" C/C bars 'f'
7/16 ϕ AT 9" C bars 'a'
⅜" Crossbars
6'-0"
7/16 ϕ AT 9" C/C bars 'a' &
⅜" ϕ AT 9" C/C bars 'f'
7/16 ϕ AT 4½" C bars 'a' & 'b'
bars 'c'
7/16 ϕ AT 9" C/C bars 'd'
7/16 ϕ AT 4½" C bars 'c' & 'd'
7/16 ϕ AT 9" C/C bars 'e'
6"
Fillets 6"×6"
bars 'e'
5"
This portion of floor forms base
to wall and is included in quantities of wall
Floor steel not shown
SECTION J-K

Fig. 58.

The notes and description of the floor for tanks above ground level also apply to the design for underground tanks. The notes regarding the construction of walls for tanks above ground again apply here, except that the reinforcement is different as will be seen from *Figs.* 57 and 58, which give full details. It will be noted that the concrete

sizes are the same as before, while it must be understood that the additional corner reinforcement shown on plan E, *Fig.* 55, must, of course, be inserted in the manner there described.

Quantities.

As in the preceding case the quantities are given here :—

(1) per square yard of floor (excluding wall base),

(2) per lineal yard of wall (including wall base).

FLOOR (*per yard super*) :—

Shuttering—5-in. board round perimeter, staked.

Concrete—9 sq. ft., 5 in. thick . . . . 3·75 cu. ft.

Reinforcement—⅜-in. bars at 18-in. centres, both ways, in top and bottom, straight, including a reasonable amount for laps . 10 lbs.

WALL (*per lineal yard*) :—

Shuttering—38 ft. super (both sides measured). Add for posts, struts and cutting.

		cu. ft.
Concrete—Wall base (or floor)	15 sq. ft., 5 in. thick .	6·25
Fillets . .	6 lin. ft., 6 in. by 6 in. .	0·75
Wall . .	18 sq. ft., 5 in. av. . .	7·50
Coping . .	3 lin. ft., 6 in. by 2 in. .	·25
		14·75

Reinforcement—approx. 106 lbs.

The notes relating to the mix of the concrete and the care in the filling of the tank given in connection with tanks above ground apply equally in the case of tanks below ground level. In addition the earth filling or tip must not be thrown against the wall and tamped until five or six weeks have elapsed (assuming ordinary Portland cement is used).

With regard to the vertical bars in this wall, it will be seen that on both earth and water faces these bars occur nearest the surface (each having ½-in. cover of concrete) so that the crossbars lie inside in both meshes.

This design would admit of the tank being tested by filling with water before the earth bank is filled in around it ; again, at any subsequent date the earth bank may be removed for short lengths, if necessary down to within, say, 2 ft. of the bottom, without emptying the tank.

Modifications for Smaller Tanks.

The following modifications for lesser depths and for short-sided tanks apply to tanks both above and below ground level.

Modifications for Lesser Depths.—Should the maximum depth

required be 4 ft. or under, the thickness of the wall may be reduced to $4\frac{1}{2}$ in. and the diameter of the bars reduced to $\frac{3}{8}$ in. The lengths of the latter must, of course, be shortened to suit, leaving a clearance or cover of $\frac{1}{2}$ in. at the top and bottom. The radius of the circular bend in the fillet bars must also be reduced to $3\frac{1}{2}$ in. The thickness of the floor may be reduced to $4\frac{1}{2}$ in. if the ground is reliable.

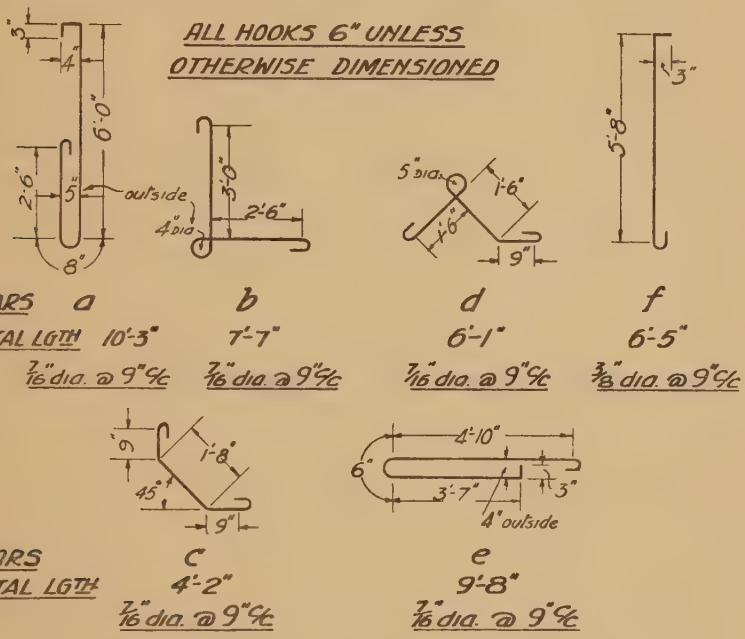

CROSSBARS—15 $\frac{3}{8}$-IN. DIAMETER BARS OF LONGEST CONVENIENT UNIT LENGTH. ADD 2 FT. FOR LAPS AND ARRANGE LAPS TO BE STAGGERED.

Modification for Tanks of less than 6-ft. Side.—If any two opposite walls of a tank 6 ft. deep are to be built closer than 6 ft., as in the case of a tank 5 ft. 6 in. square on plan, then the floor must be 6 in. thick throughout, and the top layer of floor reinforcement increased to $\frac{1}{2}$-in. diameter, hooked both ends and placed at 9-in. centres. Where the depth of water is about 4 ft. or less the original 5-in. floor thickness may be retained.

CHAPTER X

Retaining Walls

THESE notes refer to the construction of comparatively shallow retaining walls up to about 6 ft. total height, and of any length, such as would be suitable for supporting a bank of earth up to, say, 4 ft. 6 in. high.

Let it be assumed that the net height of ground to be supported is 4 ft. 6 in., that is, from lower ground line (L.G.L.) to higher ground line (H.G.L.) (see *Fig.* 59). Any wall of lesser net height can be constructed from the following particulars by deducting the difference from the top; i.e. by lowering the coping but retaining the same base and arrangement of reinforcement, and other dimensions shown.

This type is termed a cantilever wall in contradistinction to a counterfort or buttress wall, and it has been designed to retain ordinary earth trimmed to an approximately level upper surface on which only light loads (if any) would occur. If the backing is likely to be waterlogged, or to carry heavy loads—such as from a roadway, a railway, or a raft for a building, etc.—this design would not apply and specialist advice should be sought.

For the moment it will also be assumed that H.G.L. and L.G.L. are horizontal or are to be finished so, as sloping sites necessitate modifications.

Excavation.

Excavation must be carried down to the depth 1 ft. 9 in. shown on the section, and this should be considered a minimum for ordinary ground. If a good natural bearing is not found at that depth the excavation should be continued deeper until a satisfactory stratum is reached and then filled up with mass concrete (1 : 2½ : 5 mix) to the level of the underside of the base slab.

On the other hand, even if very good bearing ground is exposed before the above-mentioned depth is reached, excavation must proceed to the full depth because the side of the trench has to resist the

thrust on the back and thus to prevent forward movement of the wall. It is therefore essential that the space marked A on *Fig.* 59 be refilled with good material and well consolidated after the wall is built. The only case permitting a reduction of excavated depth in front of the wall would be when the toe (T) thrust directly against an extensive concrete slab or rock, etc.

Except in very compact ground it is desirable to run some rough

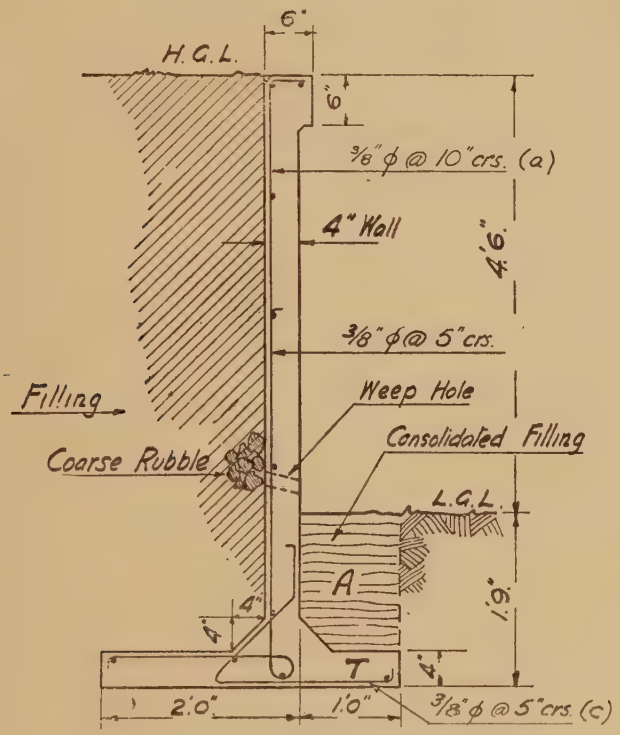

Fig. 59.—Section EF on Fig. 60.

boarding along the sides of the trench to prevent soil or the sides falling in before or during concreting.

For shallow banks it will perhaps be found cheaper to trim the bank back to a slope at which it will stand safely without danger of down-wash by heavy rains. If, however, this is not possible owing to lack of space for spoil on top or other causes, and in the case of greater height, the face of the bank must be roughly but adequately timbered and

strutted as shown dotted in *Fig.* 61, to retain temporarily the bank and prevent earth falling down into the trench.

Rough boards will then be required with posts wired back to stakes or strutted in front, as the circumstances permit. This is a matter of trench strutting, and will not be pursued here except to point out that any struts should if possible be kept clear of the future wall and its shuttering. It is worth while thinking this out clearly, otherwise the special cutting to enable temporary struts and props to run through the wall will add seriously to the cost of the job, and will afterwards be a source of weakness and trouble.

We will now assume the preceding operations are finished, and that we have a clean and firm bottom to receive the base.

During wet weather it may be difficult to keep the bottom free from mud, which must on no account be allowed to become mixed with the concrete or to coat the bars. In this case and in wet ground, therefore, a layer of rough concrete 1½ in. to 2 in. thick should be spread over the bottom of the trench to form a level and hard working floor. This concrete is, of course, additional to the 4-in. reinforced concrete base, and the excavation must also be carried 2 in. deeper to accommodate it. Any reinforcement (dealt with later) occurring in or projecting into the base-slab must now be placed, wired tightly together at all crossings with short lengths of annealed iron wire (No. 16 gauge) and securely held in position by a temporary wooden frame, or any means that suggests itself.

The main bars (i.e. all but the crossbars) are to have ½ in. cover of concrete. This can be conveniently achieved by placing short loose lengths of ½ in. diameter bar between the reinforcement and the ground or the shuttering. These form gauges, and can be moved along as concreting proceeds ; but it is necessary to move them along before ramming is finished, or continuous holes will be left on the surface of the concrete. Wood blocks or strips should not be used, for if accidentally concreted in they may seriously affect the strength of the structure. A short study of the plan, elevation, and section in *Figs.* 59 and 60 will show that the ⅜-in. bars forming the vertical reinforcement must be inserted together with the four $\frac{5}{16}$ in. crossbars in the base.

The base slab may now be concreted to its full depth of 4 in. in one operation. This should be carried out in convenient short lengths, terminated by removable staked boards against which the concrete can be rammed. Care must be taken during the punning to ensure that the concrete is rammed between and under the bars without displacing them.

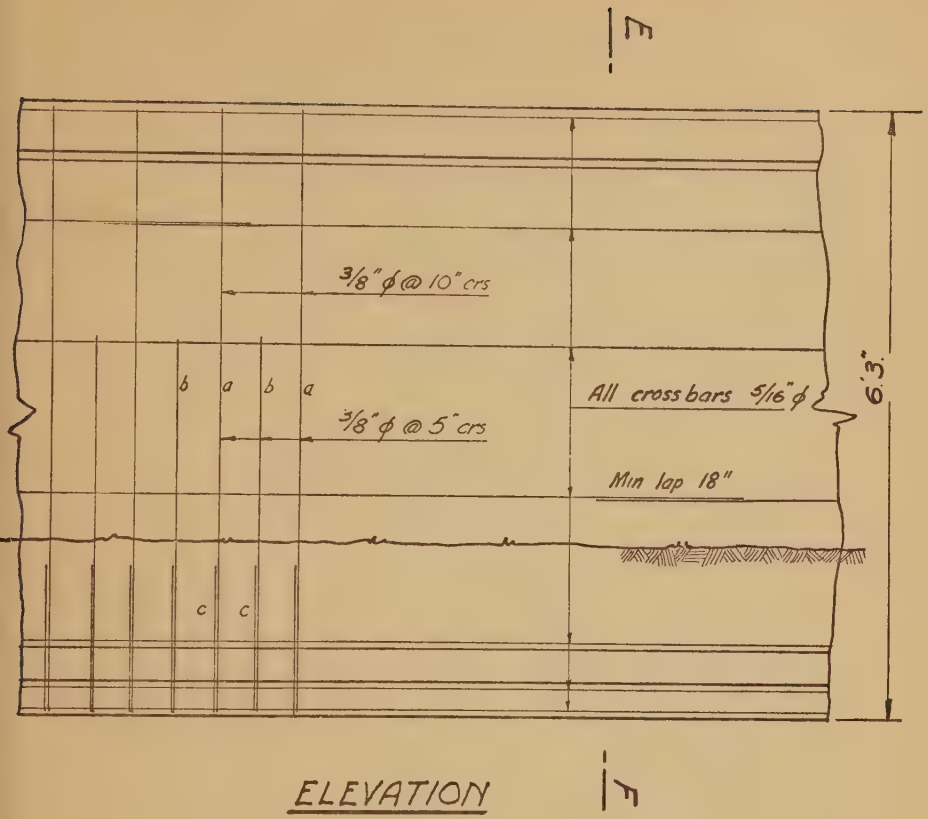

ELEVATION

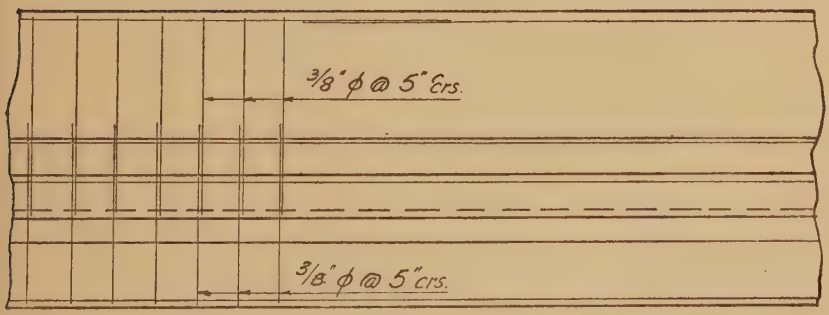

PLAN

Fig. 60. (For Section EF see Fig. 59.)

Shuttering.

A simple and satisfactory method of shuttering is shown in *Fig.* 61, the essential parts being posts, say, 4 in. by 3 in., at about 3 ft. intervals supporting horizontal 1¼-in. boards or sheeting. The posts must be braced longitudinally, and also strutted at front or rear when in position and plumb. With 1¼-in. boards the pairs of posts would be separated

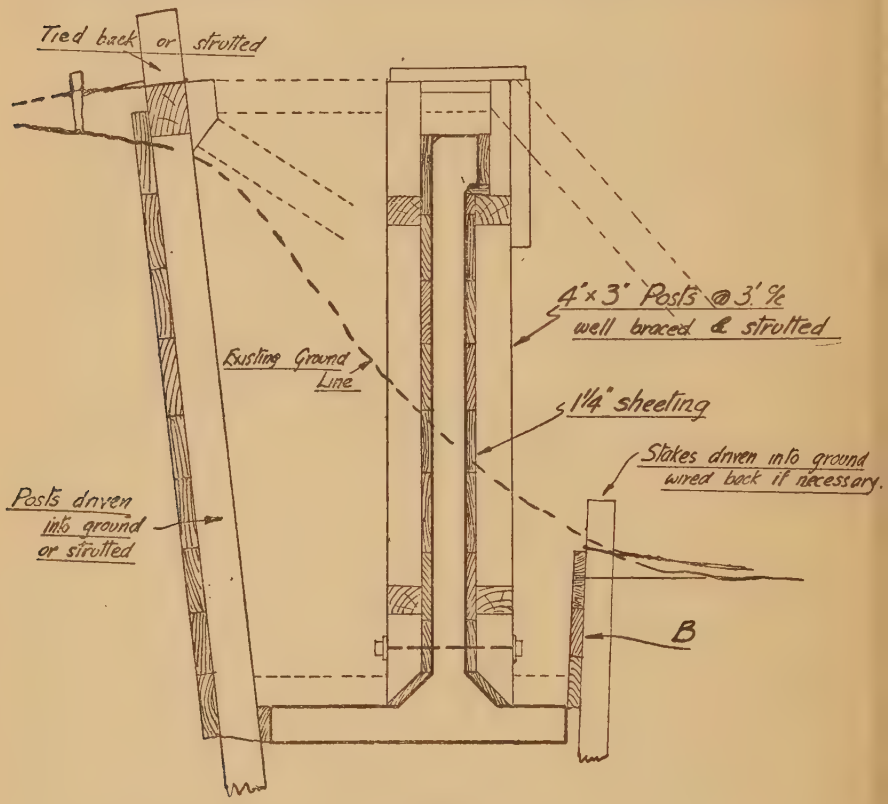

Fig. 61.

6½ in. to give a 4-in. wall. The posts and sheeting must be cut to form 4 in. by 4 in. fillets, 6 in. by 2 in. coping, and the smaller 1 in. by 1 in. fillets. For a long stretch of wall one or two unit lengths of standardised shuttering should be made, which can be dismantled and reassembled.

The posts may be strutted from other timbering at the bottom, or bolted or wired through the shuttering to the opposite post. Such bolts

or wires should if possible be withdrawn and in any case kept well below front ground level. At their tops the posts are connected by a nailed strip.

One side of the sheeting can be erected to the full height of the wall, but an open side must be left above the 4 in. by 4 in. fillets so that the concrete can be poured, crossbars wired on, the concrete rodded, and the whole easily inspected. Concreting should be carried up in 12-in. layers, by inserting two or three boards at a time on the open face and filling up, the ends of a section being stopped with removable boards to ram against.

At about 6 in. or 9 in. above L.G.L. tapered cylindrical blocks of wood should be cast in, and these can be knocked out later to form weep holes at 10 to 15 ft. centres.

The top surface of the coping need not be shuttered, but the concrete brought up flush and trowelled off smooth.

Reinforcement.

Reinforcement should consist of round bars of the diameters indicated in *Figs.* 59 and 60. The 8 ft. 11 in. long $\frac{3}{8}$-in. bars (*a*) at 10-in. centres alternate with the 6 ft. 4 in. long $\frac{3}{8}$-in. bars (*b*) at equal centres, making a series of $\frac{3}{8}$-in. bars at 5-in. centres at the bottom, from which the number of each length required can be estimated by multiplying the length of the wall in feet by $\frac{12}{10}$. The number of fillet bars (*c*) required is the same as the total of the vertical wall bars ($a + b$).

The $\frac{5}{16}$-in. cross-bars should also be so arranged that they are as long as they conveniently can be to suit the length of the wall, say, about 20 ft., and the lap at the splice should not be less than 18 in. These laps should also be arranged so that they are spread evenly along the length of the wall and are not bunched together near any one section. The wall should be drawn out to scale and the bars set out, measured off, and ordered accordingly. The total weight of steel per yard run of wall is approximately 40 lbs., including an allowance of 10 per cent. for crossbar laps.

For a wall of this nature the bars can be assembled in short units and lifted into the trench. Some or all of the wall crossbars may be omitted until the base has been concreted, but the tops of the $\frac{3}{8}$-in. bars should be securely fastened to a wooden strip, which can form part of the framework, holding the reinforcement in position before the base is concreted and has set. It is very important that bars projecting from concrete—particularly green concrete—should not be disturbed.

Removal of Shuttering.

The wall will not reach its proper strength to resist earth thrust until at least six weeks have elapsed after concreting (or less with rapid-hardening cement), so that the future bank which has to be retained must not be filled in behind the wall until this period has passed unless the face shuttering be retained and strutted to take the earth thrust. When inserting this filling, coarse rubble or the largest stones available should be placed around and above the weep holes. The filling in front of the wall should, of course, be placed before that at the back, and be well consolidated as mentioned above.

WALL: OVERALL HEIGHT, 6 ft. 3 in.

QUANTITIES PER LINEAR YARD OF WALL.

(Based on 1 : 2 : 4 concrete.)

			cu. ft.
CONCRETE:—Base . .	1 sq. yd.	4 in. thick	3·0
Fillet . .	6 lin. ft.	4 in. by 4 in.	0·33
Wall . .	2 sq. yds.	4 in.	6·00
Coping . .	3 lin. ft.	6 in. by 2 in.	·25
			9·58

SHUTTERING:—Wall: 38 ft. super (both sides measured) net. Add for cutting, posts, struts, etc.

REINFORCEMENT (approx. 40 lbs.):—

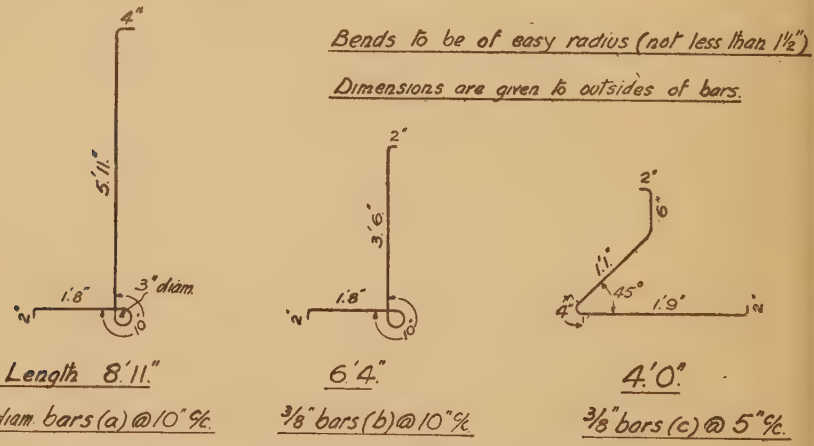

Cross bars—10 $\frac{5}{16}$ in. diam. per unit length of wall.
(Add 1 ft. 6 in. to unit length for lap.)

Modifications for Lower Walls.

If the net height be considerably less than 4 ft. 6 in. the diameters of the bars may be reduced as shown in *Table* 15.

TABLE 15.—MODIFICATIONS FOR LOWER WALLS.

Height of Wall.	Diameter of Bars.	Width of Base.
(L.G.L. to H.G.L.)	(at 5 in. centres)	(See *Fig.* 59.)
4 ft. 6 in. to 3 ft. 9 in.	$\frac{3}{8}$ inch	2 ft. 0 in. heel and 1 ft. toe
3 ft. 9 in. to 3 ft. 0 in.	$\frac{5}{16}$ inch	2 ft. 0 in. heel and 9 in. toe
3 ft. 0 in. and below.	$\frac{1}{4}$ inch	1 ft. 9 in. heel and 9 in. toe

The spacing of the bars, diameter of crossbars, and thickness of concrete remain as indicated in *Figs.* 59 and 60, but the width of base may be decreased according to *Table* 15. The vertical and horizontal lengths of the main bars must therefore be adjusted to the new dimensions, but the 1 ft. 9 in. depth below L.G.L. should not be reduced.

Expansion Joints.

The necessity for expansion joints varies, of course, with circumstances, and would not arise at all in the case of short walls up to, say, 50 or 60 ft. long. In long straight walls, however, joints should be provided at from about 100 ft. intervals for sheltered walls facing north to 50 ft. intervals for very exposed positions facing south. Many walls have, of course, been built with joints, if any, at much greater intervals; but a risk is involved if the limits are materially increased or the matter entirely ignored. On the other hand, the more joints provided the less will be the tendency for contraction cracks to appear.

Should it be desired to increase the intervals, the number of cross bars in the wall and coping should be increased in the same proportion as the interval is increased, and the crossbars placed equally along both surfaces of the wall.

A suitable joint is shown in *Fig.* 62, the gap between the ends of each section of wall being $\frac{1}{2}$ in. This gap may be conveniently screened by a post, a series of which would be introduced to relieve the monotony of a long stretch of plain wall. The post may be pre-cast or cast *in situ* together with one section of the wall, while a paper or sliding joint is left against the adjacent section. In the case illustrated the joint is covered at the rear and under the base by a 4-in. pre-cast plank, which prevents soil entering and at the same time allows of free longitudinal movement due to temperature and humidity changes.

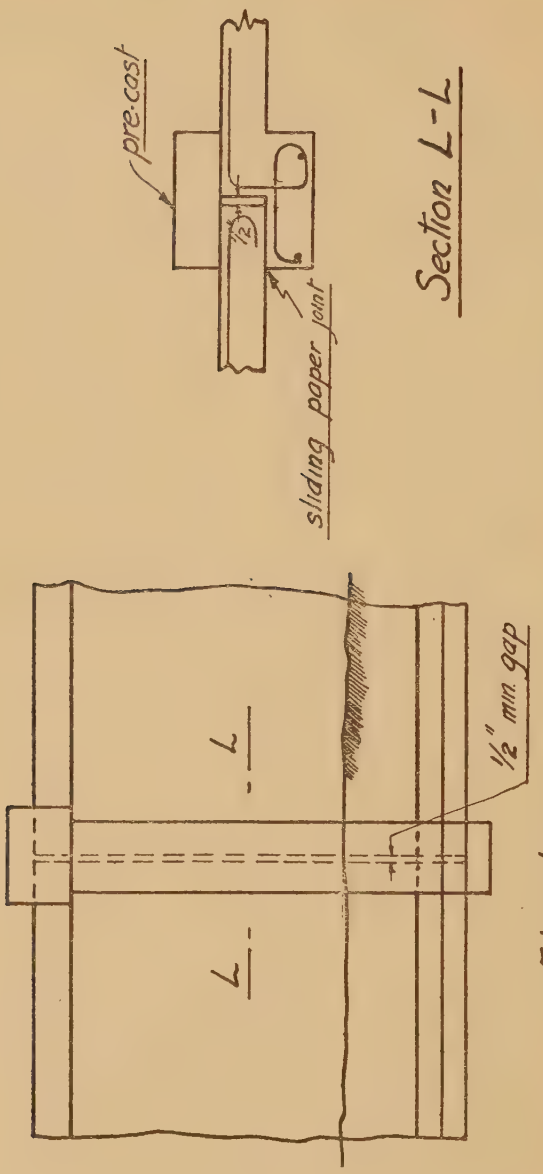

Fig. 62.—Expansion Joint.

If the joint is not thoroughly cut off from the earth filling, or if there is any danger of it filling from any cause whatsoever, the gap should be filled with yielding material, such as a bituminous preparation, to exclude stones and soil and so ensure that it always functions properly.

It should be noted that all crossbars are to be well hooked at their ends abutting the joint.

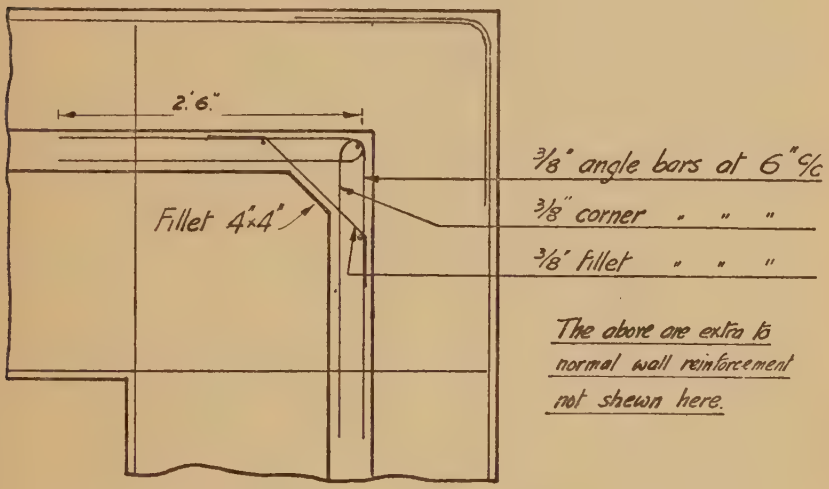

Fig. 63.—Section through Corner.

Returns and Angles.

The stresses in a cantilever wall are entirely altered at any point of sharp change in direction on plan, and additional horizontal reinforcement is then required. If this extra horizontal reinforcement is omitted or insufficient, the wall will crack at, or near, the corner in order to adjust itself to the vertical reinforcement provided. The latter is, of course, sufficient from the point of view of safety but cannot prevent vertical cracks, which are defects to be foreseen and avoided.

For the walls described the following horizontal bars are required extra to the usual cross bars (which should be continued 12 in. round the corner). The shapes to which they are to be bent and their positions are given in *Fig.* 63. Each set of bars, consisting of $\frac{3}{8}$-in. corner, angle, and fillet bars, is to occur at 6-in. centres all the way up the corner. The cross-bars in the base should also be taken well on, and the outer one bent round the corner.

Sloping Sites.

More often than not it will be found that either or both the higher and lower ground lines are inclined when the wall is viewed in elevation. This introduces a difficulty in that the limits of heights and depths are soon outrun, as the base, except in very rare cases, must be maintained horizontal throughout. The base should therefore be stepped at intervals, as in the case of house footings on sloping sites.

The coping may follow the slope of the H.G.L., but a much better appearance will result if, when possible, the top is trimmed level to permit of the coping being horizontal. Both the top and base can then be stepped at regular intervals to accommodate the wall to the general slope, as shown in *Fig.* 64. There is an additional advantage in so doing, because the wall is constant in dimensions throughout the interval.

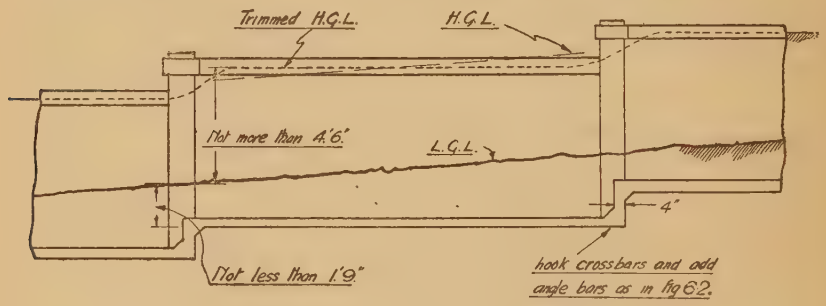

Fig. 64.—Wall on Sloping Ground.

Practically each case will need individual treatment, so that an accurate survey must be made and plotted, and the wall drawn out so that its minimum depth below L.G.L. is 1 ft. 9 in., while its maximum net height must not exceed 4 ft. 6 in. Where the inclination is very marked and the foundation sound, the 1 ft. 9 in. depth may be reduced to 1 ft. 6 in., when continuous with a deeper base.

The junction at each step should be provided with a post or pillar of adequate width to correspond with the length of each section, and reinforced with a $\frac{3}{8}$-in. bar at each corner with $\frac{1}{4}$-in. binders at 9-in. centres vertically. The normal wall reinforcement must, of course, be inserted, and not omitted for the width of the pillar, which is purely a decorative addition of no structural value. Expansion joints in a stepped wall would naturally be arranged to occur behind some of these posts.

CHAPTER XI

General Specification and Notes

to accompany the designs for the Reinforced Concrete work described in this book.

(1) REINFORCEMENT.—The reinforcement is to consist of mild steel bars to British Standard Specification for Structural Steelwork (i.e. ultimate tensile strength, 28 to 33 tons per sq. in.).

Bars must be cleaned of all scale, dust, dirt and loose rust, before being placed in position.

Every bar is to be inspected before assembling on the work and any defective or burnt bar removed.

No welding will be permitted.

(See also Bending—Clause 9.)

(2) TYING WIRE.—This shall consist of No. 16 S.W.G. annealed soft iron wire cut into conveniently short lengths for tying bar crossings. Length of pieces varies from $4\frac{1}{2}$ in. to 11 in. according to diameter of bars tied.

(3) CEMENT.—Only approved Portland cement from recognised reliable makers shall be used. Ordinary Portland cement (O.P.C.) shall conform to the current British Standard Specification for " normal " setting Portland cement. Rapid-hardening Portland cement (R.H.C.) shall conform to the above-mentioned specification and in addition shall develop the following tensile strengths for 1 part cement and 3 parts standard sand briquettes:

After	3	days	at least	500	lbs.	per sq. in.
,,	7	,,	,,	600	,,	,,
,,	28	,,	,,	650	,,	,,

The cement manufacturer's signed certificate shall accompany each consignment, stating the results of tests.

The cement shall be delivered in properly sealed bags or barrels, and shall be carefully protected against adverse weather conditions at all times. It shall be stored in a perfectly waterproof and reasonably airtight shed of which the floor is raised from the ground. If kept for

any length of time before being used the bags should be emptied into bins or compacted heaps. Partially set, lumpy, or otherwise damaged cement shall not be used.

Cement should be measured by weight, but if gauge boxes are used the following figures give the approximate density:

1 cu. ft. of O.P.C. weighs 90 lbs.
1 „ „ R.H.C. „ 80 „

(4) Coarse Aggregate shall consist of broken stone or gravel crushed to pass through a $\frac{3}{4}$-in. ring but not through a $\frac{1}{4}$-in. ring, and the sizes of these particles shall be graded uniformly between these limits. They shall also be cubical or spherical in shape, not thin or flaky.

Unless perfectly clean the aggregate shall be thoroughly washed. If crushed stone is used care must be exercised that too much stone dust does not adhere to the surface of the particles.

Aggregate shall be measured separately and by volume in a prepared gauge box.

(5) Sand (or fine aggregate).—Sand shall be perfectly clean and composed of hard silicious or other approved mineral grains. It shall be free from clay, loam, and any animal, vegetable, bituminous, or other deleterious matter. Unless initially clean all sand shall be thoroughly cleaned by washing in flowing water.

Sand shall, if possible, be evenly graded from the maximum size of particle of $\frac{3}{16}$ in. downwards, but shall not contain more than 10 per cent. of fine grains that pass a 76 (to the inch) sieve.

Sand shall be measured separately and by volume in a prepared gauge box.

(6) Water.—Only clean fresh water shall be used, free from earthy, vegetable, and organic matter; also free from acid or alkaline substances in solution or suspension in sufficient quantity to affect the concrete or work adversely in any way.

(7) Concrete Proportions.—The concrete shall be composed of cement, sand, and coarse aggregate in the following proportions:

Four parts of coarse aggregate, two parts of sand, and 1 part of cement, all by volume: say, 10 cu. ft. of coarse aggregate, 5 cu. ft. of sand, and $2\frac{1}{2}$ cu. ft. of cement. It is always preferable, however, to measure the cement by weight, in which case the above proportions equal 10 cu. ft. coarse aggregate, 5 cu. ft. sand, and 2 cwts. of cement when O.P.C. is used. When R.H.C. is used the weight of cement may be reduced to 200 lbs. A batch of the above volumes will yield about $11\frac{1}{2}$ cu. ft. of finished concrete.

Aggregates shall be measured in correctly proportioned gauge-boxes;

the following sizes are required for the mix given above. All three boxes 24 in. internally, square on plan.

Height of coarse aggregate box 30 in. (internal).
" sand " " 15 " "
" cement " " 8 " "

If hand mixing is employed, or if the aggregate and sand are mixed before being put into the mixer, the two first boxes need not have bottoms, but they must be used on a clean board or staging. When feeding the mixer the ingredients must be fed into it in the order given above.

The least quantity of water shall be added that will produce a workable concrete suitable for the portion of the structure in question and having regard to the weather conditions prevailing, i.e. sufficient to allow of a plastic mixture being tamped into all parts of the mould and between the reinforcement.

(8) Concrete Mixing.—Whenever possible, concrete is to be machine-mixed in a batch mixer. The time of mixing will depend on the machine used, but must not be less than 2 minutes or more than 10 minutes in normal circumstances.

All mixed concrete shall be deposited immediately if possible. At the most it must be used within 15 minutes from the commencement of the mixing even under the most favourable weather conditions, and any concrete not placed within this period must not be used. Great care must be taken, particularly in hot weather, that no set or partially-set concrete is used. Retempering will not be permitted.

The machine shall be washed out and the drum left clean when it is to be shut down for more than 15 minutes.

If hand mixing is undertaken the following rules must be observed:

(1) After gauging the aggregate and sand shall be thoroughly mixed and spread over a watertight mixing board.

(2) The cement shall be added and the whole mass turned over three times dry.

(3) A measured quantity of water shall then be applied through a rose or perforated nozzle of a watering can. So far as possible the batches shall always be brought to the same degree of wetness.

(4) After wetting, all ingredients shall be turned over three times or more until the concrete has an even consistency throughout.

All tools and conveying equipment shall be cleaned of adhering concrete after concreting is finished.

(9) Bending of Reinforcement.—All bends must be made accurately, special care being taken to ensure that the depth or crank is correct. The bends are to be of easy radius, say, 10 diameters of the bar bent,

except in special cases such as right-angle bends and hooks when the axial radius must not be less than four diameters. If any difficulty is experienced, or damage occurs, owing to bending the bars cold, they should be heated but not beyond a dull red glow; they shall be allowed to cool slowly and not suddenly by applying water or other liquid.

Unless otherwise stated hooks shall be of the standard pattern shown below.

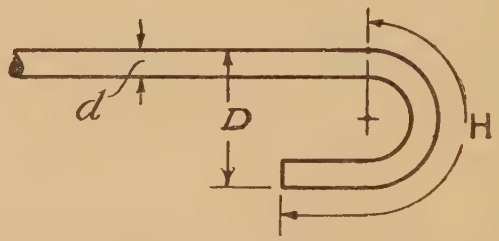

Diam. of bar " d " in ins.	Minimum outside diameter of Hook D in ins.	Length of hook from straight in ins. H.
$\frac{1}{4}$ and $\frac{5}{16}$	2	4
$\frac{3}{8}$	3	5
$\frac{7}{16}$ and $\frac{1}{2}$	3	6
$\frac{5}{8}$	4	6
$\frac{3}{4}$ and $\frac{7}{8}$	5	9
1	6	12

(10) PLACING OF REINFORCEMENT.—All bars for any portion of the work are to be bent, placed carefully and correctly in position, and firmly wired together before concreting is commenced. To aid placing, notched boards or other templates may be used. It is essential that the smaller bars, stirrups, and links be as carefully placed as the larger bars. The reinforcement is to be wired at a sufficient number of crossings with No. 16 S.W.G. wire to hold it securely during concreting and ramming. Wood blocks must not be used as spacers. When spacers are necessary, as, for example, to support the slab bars above the slab shuttering, short lengths of bar, equal in diameter to the cover required, may be employed and withdrawn as concreting proceeds so as not to leave cavities or disturb the set; or preferably small cement mortar or concrete blocks of depth equal to the cover can be cast into the work.

Wherever possible bars should be wired into a frame or mesh before placing in the forms.

The reinforcement must be clean; a stiff wire brush shall be used

to remove scale or loose rust. On no account shall bars be oiled or painted.

Bars must be of the proper length and no splicing of the reinforcement shall be undertaken.

(11) LAPS.—Where cross-bars or distribution bars are lapped the following standard laps are the minimum permissible:

Diameter of Bar.	Lap.
¼ in.	1 ft. 3 in.
5/16 „	1 „ 6 „
⅜ „	1 „ 9 „
7/16 „	2 „ 0 „
½ „	2 „ 6 „
⅝ „	3 „ 0 „

(12) COVER.—The cover of concrete, i.e. distance between the outside of the concrete and the nearest part of the bar, to be as under:

½ in. for slab bars.
1 in. for beam and column bars.

Exterior columns, however, should have 1½ in. cover. Any work which will be in contact with sea water or sewage at any time should have the above cover distances doubled.

(13) FORMWORK.—The formwork, shuttering, or centering shall be true to line and strong enough to hold the wet concrete and any incidental superimposed load without appreciable settlement, deflection, or vibration. It must be sufficiently tight to prevent leakage of mortar. Special care shall be taken to prevent bulging. Wrought timber free from knots and defects shall be used for exterior surfaces or those exposed to view. Before forms are used for a second or third time they must be cleaned and old nails, etc., withdrawn. A slight camber of ¼ in. per ten feet of span is to be given to all beams in addition to any inclination or curves of the soffits shown on the drawings.

All internal and external angles of beams and columns shall be provided with fillets 1 in. by 1 in. The inside of forms shall be coated with non-staining mineral oil, limewash, or other approved material, or be thoroughly wetted (except during freezing weather). Where oil is used it shall be applied before the reinforcement is placed.

Temporary openings shall be provided at the base of column and wall forms and at other points where necessary to facilitate cleaning and inspection immediately before depositing concrete.

Props or struts under forms shall be supported on folding wedges on sole plates large enough to prevent settlement.

Unless all the formwork can be left in position until the beams are struck, it must be so arranged that the sides of the columns and wall shall be first removed, then the sides of beams and soffits of slabs, and finally the soffits of the beams themselves without the operations causing any disturbance to the formwork left in position.

In the design and construction of formwork the use of nails shall be reduced to a minimum in favour of bolts and clamps at the junction of removable units, so that shock and undue force are eliminated during the striking of the units.

(14) Placing of Concrete.—It is very important that only clean tools and utensils be used. Before depositing concrete, examine formwork and remove dirt, loose stones, shavings, etc., and thoroughly wet, oil, or limewash interior of moulds. Clean, wash, and well brush over with thick cement grout the surfaces of concrete previously placed to which the new concrete is to adhere. Examine and check reinforcement, particularly for position and security during ramming.

The concrete shall be taken as quickly as possible and deposited gently into position, where it shall be rodded and rammed thoroughly around the bars and into the corners of the forms. Concrete must not be tipped or dropped from a height. It is essential that a dense concrete be formed and that no voids and cavities are left; this can only be assured by thorough and repeated rodding and ramming.

Flat metal spatulas should be made for working against the faces of beams, etc., and to procure a good surface.

It is very important that bars are not displaced during concreting; also great care must be taken that bars which project from concrete that has just been placed are not shaken or disturbed, as this will destroy the strength of the concrete after initial set where it touches the bars and its full strength will never be recovered. Concrete that has been tamped and finished must not be disturbed again for the same reason.

(15) Where to Stop Work.—When concreting is once commenced it must be carried on without stopping until the work or a pre-arranged portion of the work is completed. If, however, a cessation of work is unavoidable, the break must be made in the centre of the span of beams or slabs which are in course of construction by a vertical joint at right angles to the direction of the span of the beam or slab, a temporary board being inserted across the beam or slab, so that the concrete can be rammed hard against it. It is of importance that no joint should be made towards the ends of beams or slabs or close to a concentrated load.

(16) Recommencing Work.—Wherever a stop has been made in concreting, before restarting the work the surface of the existing concrete

must be carefully roughened, cleaned, washed with a stiff brush to remove loose particles, and a thick grout of neat cement must be worked over it immediately before the new concrete is rammed against it.

(17) MATURING OF CONCRETE.—No concreting is to be undertaken if the temperature is liable to fall to or near freezing point. If there is a possibility of frost after any concreting has been completed it must be carefully covered over with sacking, straw, etc. The formwork must not be struck before the usual period specified for any member plus one day for every day on which the thermometer has fallen below 40 deg. F. The danger of damage by frost is greatly reduced by the use of R.H. Cement.

In addition to the protection of new concrete against frost, great heat, or drying winds, it must be well watered daily for at least 7 days if O.P.C. is used. When R.H.C. is used particular care must be taken that the concrete is kept very wet for the first 3 days, and then daily as long as possible.

(18) COLUMNS.—The formwork on three sides should first be placed in position, and the reinforcement, previously wired into a frame, fixed within. The concrete is then placed in position through the fourth side of the columns, the shuttering to this fourth side being brought up as the concreting proceeds.

If the column is filled from the top great care must be taken to avoid displacing the links; the concrete must be deposited in layers not exceeding 6 in. at a time and must be well rodded. It is most important that the ramming is very thorough, and a long narrow grafting tool should be employed for this purpose. Columns or supports shall be brought in horizontal layers to between 2 to 4 in. below the soffit of beam or haunch. On restarting the joint must be carefully examined, washed, and cleaned, and covered with cement grout as for vertical joints.

(19) BEAMS.—If any difficulty is found in getting the concrete to pass between the lower bars in the rib of a beam, the first inch or two of concrete may be made of a finer and more liquid consistency than that used elsewhere. The mould must not be filled to the underside of bars and then the bars placed within; all reinforcement must be placed and securely wired before concreting. If for any special reason it is found necessary to construct that portion of the beam which projects below a slab (i.e. the rib) before the slab itself is poured, it is important that the joints are not left too long, are treated as mentioned in clause 16, and are provided with ample reinforcement projecting up from the rib into the slab. It is always desirable to cast them together so that they may be monolithic.

(20) Slabs.—The slab bars must be placed in position, wired together at their crossings, and wired to the top beam-bars before concreting is commenced. Notched boards should be used as templates for bar centres. Care must be taken that the bars do not fall over or become displaced during concreting; they must be raised above the forms by removable bars or concrete or mortar blocks. Walking and wheeling boards must be arranged above the bars so as not to transmit any load or vibration to the bars by workmen, barrows, etc.

(21) Fittings and Accessories.—Bolts, sockets, pipe hooks, etc., shall be built in accurately as work proceeds. No cutting out afterwards will be allowed as such may seriously impair the strength of the member.

(22) Removal of Formwork.—The formwork shall be removed in the order mentioned in clause 13 and after the periods specified below. Before any striking is commenced the concrete shall be examined to ascertain that it has set and hardened properly. Great care must be exercised during removal to avoid shock or reversals of stress owing to some supports being lowered quicker than others. Striking must only be carried out under the direct supervision of the person in charge of the work. The following periods are given as a guide for normal maturing conditions and they must be lengthened when necessary, such as, for instance, after frost, when one day will be added for every day on which the thermometer has fallen below 40 deg. F.

The minimum periods after the last pouring are as follows:

Portion of Structure.	Using O.P.C.	Using R.H.C.
Footing sides	4 days	2 days
Column sides	6 days	3 days
Wall sides	4 days	2 days
Slab soffits (up to 6 ft. span)	7 days	4 days
„ „ (over 6 ft. span)	10 days	5 days
Beam sides	6 days	3 days
Beam soffits	21 days	10 days

Where upper floors are propped from lower ones, props must be left under the latter until those props above are removed.

No heavy or concentrated loads shall be allowed to come on the work until the expiration of the periods in clause 23.

(23) Full Working Load and Test Load.—The full working load and test loads shall not be allowed on the work until the following periods have elapsed after the formwork has been removed. The test load shall

not exceed one and a half times the working load for which the work has been designed.

	Using O.P.C.	Using R.H.C.
Full working load for which work has been designed	6 weeks	3 weeks
Test load	8 weeks	4 weeks

(24) Surface Finish.—Surfaces hidden from view shall be as left from the formwork providing they are reasonably smooth. Surfaces that will ordinarily be visible shall be rubbed down with a carborundum brick to remove board marks, etc. Any cavities are to be neatly pointed in cement mortar. The whole surface should be given a wash of cement grout or other material so as to present finally an even colour throughout.

Table 16.

Weight of Steel Bars per foot run.

Diam. in ins.	Wt. in lbs.	Diam. in ins.	Wt. in lbs.
$\frac{3}{16}$	0·094	$\frac{1}{2}$	0·668
$\frac{1}{4}$	0·167	$\frac{5}{8}$	1·04
$\frac{5}{16}$	0·261	$\frac{3}{4}$	1·50
$\frac{3}{8}$	0·376	$\frac{7}{8}$	2·04
$\frac{7}{16}$	0·510	1	2·67

Books on Concrete

SEND A POSTCARD FOR DETAILED PROSPECTUSES OF THESE AND OTHER UP-TO-DATE AND USEFUL BOOKS ON CONCRETE

THE POSTAGE RATES ARE APPLICABLE TO ANY PART OF THE WORLD

Published by
CONCRETE PUBLICATIONS LIMITED
20 DARTMOUTH STREET, LONDON, S.W.1.

ELEMENTARY GUIDE TO REINFORCED CONCRETE

By Albert Lakeman, L.R.I.B.A., M.I.Struct.E., Honours Medallist Construction. Late Lecturer, Woolwich Polytechnic. Price 2*s.* ; by post, 2*s.* 3*d.* Sixth Edition.

For the builder, the student, the clerk-of-works, the foreman, or anyone interested in building and wishing to gain a knowledge of the principles and practice of reinforced concrete, there is no better book than this. It is especially written for the beginner, and on the assumption that the reader has no previous knowledge of the subject whatever. The author is well known for his lucid manner of explanation, which he has used in this book to make clear the principles governing the design of reinforced concrete in a way that can be readily grasped without reference to any other text-book.

The Chapters include : Introduction and Explanation of Terms ; Loads ; Reinforcement ; Neutral Axis ; Reinforced Concrete Beams ; Fixed and Supported Beams ; Leverage of Beams ; Bending Moments ; Shearing Stress and Slabs ; Reinforced Concrete Columns ; Reinforced Concrete Walls ; Bases and Foundations.

The simple explanations are illustrated with clearly-drawn diagrams, 79 in number, which are used wherever necessary to make the text readily understandable.

Some Appreciations.

"Mr. Lakeman has the invaluable faculty of explaining his points in a very clear and thorough manner. Every builder carrying out reinforced concrete would do well to study this book, and obviate many mistakes." —*The Architect.*

"Explanatory matter is kept as simple as possible, and highly technical language avoided. Will appeal to students."—*Daily Telegraph.*

"Will enable foremen to supervise work intelligently, thus enabling builders to reduce the danger of defective work, with its serious consequences."—*Carpenter and Builder.*

"Accepted principles of Design and Construction are explained in simple language, readily understandable by the beginner. Would be of value to the builder and student, as the essentials of concrete design can be readily learned therefrom."—*Builder.*

"Every inspector and foreman engaged on reinforced concrete construction would be greatly benefited by the knowledge obtainable from a perusal of this book."—*Engineer.*

"Clearly printed and illustrated, and is remarkably good value for the low price charged for it. We can strongly recommend this book."—*Journal Inst. Structural Engineers.*

DESIGN AND CONSTRUCTION OF

FORMWORK FOR CONCRETE STRUCTURES

By A. E. Wynn, B.Sc., A.M.Am.Soc.C.E.

320 Pages, 219 Illustrations, 12 Folders, 11 Design Tables. Strongly Bound in Cloth Covers. Price 20*s.*; postage 9*d.* extra. Price in United States, 5 dollars, post free.

Gives complete designs for formwork for every type of plain and reinforced concrete structures, from simple footings to arch bridges, with tables from which the size and quantity of timber required for any type or size of structure can be seen at a glance.

Contents.

CHAPTER

I—Form Building in General.
II—Materials, Loads, Pressures and Stresses.
III—Theoretical Design of Forms.
IV—Design Tables.
V—Design Problems.
VI—Detail Construction of Footing Forms.
VII—Detail Construction of Column Forms.
VIII—Wall Forms.
IX—Detail Construction of Beam and Girder Floor Forms.
X—Forms for Rib Floors and Structural Steel Fireproofing.
XI—Miscellaneous Forms in Building Construction.
XII—Forms for Flat Slab Construction.
XIII—Forms for Conduits, Sewers and Culverts.
XIV—Forms for Tanks, Silos, Bins and Standpipes.
XV—Forms for Dams, Piers and Heavy Walls.
XVI—Steel Forms in Building and Wall Construction.
XVII—Steel Forms for Curved Surfaces.
XVIII—Arch Falsework.
XIX—Other Bridge Forms.
XX—Patent Devices.
XXI—Planning the Work.

Some Appreciations.

"We consider this book absolutely essential to any engineer or contractor engaged in the erection of concrete work. The design tables are invaluable, and the photographs and drawings extremely clear and practical. The data for labour costs should prove of great value in estimating. We consider the book very cheap for the mass of valuable information it contains."—*Galbraith Brothers, Ltd., Builders, London.*

"We want to keep abreast of modern construction, and feel sure that the knowledge to be gained from this book will be extremely useful."—*Mark Round & Sons, Ltd., Builders, Dudley.*

"This book should be in the hands of every builder and contractor, and it should also be a text-book in technical schools. I have obtained much useful information from it which has helped to simplify the construction of shoring and temporary work."—*Robert Colhoun, Builder, Londonderry.*

"This book is the best on the subject we have seen."—*James Bodle, Ltd., Builders, Eastbourne.*

"This publication should be studied by all concrete contractors. The portion devoted to the theory and design of strength of centering is especially valuable. The tables are very simple and the illustrations clear."—*J. B. Johnson & Co., Builders, Liverpool.*

"This book should be of great use to those engaged on the actual construction of concrete work."—*Provincial Construction Co., Ltd., Sunderland.*

"The constructions suggested are simple, and should prove very economical. The tables should enable shuttering to be speedily designed, as it appears that calculations can be entirely done away with."—*J. & W. Stewart, Contractors, London.*

"We believe this book will help to reduce the cost of ferro-concrete construction."—*Watkin, Williams & Sons, Builders, Cardiff.*

"This should be in the hands of every architect, engineer, contractor, and foreman specialising in concrete work."—*Joseph Wheater, Ltd., Builders, Bradford.*

THE CONCRETE YEAR BOOK

A HANDBOOK, DIRECTORY AND CATALOGUE OF CONCRETE.

(Published Annually on January 1st.)

Edited by OSCAR FABER, O.B.E., D.Sc., M.Inst.C.E., and H. L. CHILDE.

About 650 pages, price 3*s.* 6*d.*; by post 4*s.*

HANDBOOK SECTION.—The Handbook Section contains authoritative chapters on every aspect of concrete and reinforced concrete design and construction, embracing the latest practice at home and abroad. This section includes, among other subjects:—

CONCRETE MAKING.—Notes on the best method of securing strong concrete of uniform strength, water content, coloured cement, storage of cement, etc.

DESIGN TABLES for reinforced concrete slabs for various spans and loadings.

FOOTING TABLES from which the size and reinforcement of footings necessary for various pressures can be seen at a glance.

LOADINGS.—Data relating to floor and roof loads, loads of walls and partitions, wind pressures, earth pressures, foundation pressures, etc.

BEAMS.—Properties of common sizes of reinforced concrete beams.

FLOORS.—Specifications and designs for various types of concrete and reinforced concrete floors. Specification for granolithic floors.

WATER TOWERS.—Designs and tables for ascertaining the approximate cost of water towers of different sizes and heights.

SURFACE TREATMENT.—Illustrated specifications for different methods of surface treatment for concrete.

RESERVOIRS.—Data on design and construction of reservoirs and underground tanks, with typical design.

SEWERS, CULVERTS, PIPES.—Designs for all kinds of concrete sewers, culverts, and pipes, with notes on construction and laying.

CONCRETE ROADS.—Up-to-date specifications for concrete road construction.

MEMORANDA.—The most complete memoranda ever published of everyday use to the concrete user.

DIRECTORY.—The Directory Section is the only complete directory of the concrete industry published in this country, classified under different headings for ease of reference. A complete list of trade names and brands in use in the industry is a valuable feature.

CATALOGUE.—The Catalogue Section contains full particulars of the businesses or products of more than 300 firms connected with or catering for the concrete industry, and is invaluable to anyone seeking a firm of contractors to carry out special kinds of work, or a machine or product for a special purpose.

CONCRETE COTTAGES, BUNGALOWS AND GARAGES

By Albert Lakeman, L.R.I.B.A., M.I.Struct.E. Second Edition. Fully Illustrated. Price: Cloth bound, 5*s*. net; paper covers, 3*s*. 6*d*.; postage 6*d*. extra.

This book contains all the information necessary to build small houses in concrete at a cost of from 9*d*. per ft. cube.

Seven Designs for cottages, bungalows, and garages have been specially prepared by the author for construction in concrete, and with each design is given all the information necessary for its erection, including Perspective Drawings showing the same designs with flat and pitched roofs, Plans, Sections, Full Working Drawings, and Detailed Bill of Quantities. A fully-priced detailed estimate of cost is given for a typical cottage built to the author's design.

Other chapters deal with the lay-out and organisation of sites, alternative methods of construction, etc.

MODERN METHODS OF CONCRETE MAKING

By A. E. Wynn, B.Sc., A.M.Am.Soc.C.E., and Ewart S. Andrews, B.Sc., M.Inst.C.E. Second Edition. Price 1*s*. net.

In this book are described in simple language the methods of making concrete at a minimum cost. The cement-water ratio is explained, and tables and curves show the quantity of water necessary to give maximum strength with different concrete mixes and with different size aggregates.

The first edition was sold in six months. The new edition includes data relating to British Portland cements and rapid-hardening Portland cements. Curves have been plotted, from which one can see at a glance the amount of water and cement necessary to produce concrete of any desired strength at 28 days or three months. It is thus possible definitely to " design " a concrete mix that will be no stronger or no weaker than required, with consequent saving in cement. By making use of the data and curves in this book it is possible to design a concrete that will not vary however much water is used providing the cement content is reduced or increased according to their rules.

"CONCRETE AND CONSTRUCTIONAL ENGINEERING"

Published Monthly. Price 1*s.* 6*d.* per copy; Annual Subscription, 18*s.* post free.

This is the only journal published in this country dealing solely with reinforced concrete in all its aspects, and counts amongst its regular contributors the leading experts at home and abroad in the theory and practice of reinforced concrete. It is the only medium through which those engaged in the concrete industry can keep up to date with current theory and practice.

Send a postcard for a free specimen copy.

"CONCRETE BUILDING AND CONCRETE PRODUCTS"

Published monthly. Price 4*d.*; Annual Subscription, 4*s.* post free.

A practical paper for builders in concrete, and concrete products and cast-stone manufacturers. Throughout the journal is written in simple and readily understandable language. A "Questions and Answers" page, in which subscribers' problems are solved and advice given by experts, free of charge, is a special feature of each issue.

Send a postcard for a free specimen copy.

MANUFACTURE AND USES OF
CONCRETE PRODUCTS AND CAST STONE

By H. L. Childe. 256 pp., 160 Illustrations. Colour Plates. Strongly Bound in Boards. Price 5*s.*; postage 6*d.* extra.

A new volume dealing exhaustively with every phase of the manufacture of pre-cast concrete, concrete products, and cast stone of every description and for all purposes. Written in simple language, illustrated with photographs and clear drawings on practically every page. All the available information on pre-cast concrete, from tiles to architectural cast stone, is embodied in this practical work. The essentials of selection of materials, grading and proportioning, mixing, curing, etc., are fully covered. Methods of surface treatment are described and illustrated in colour and half-tone, and methods of making coloured concrete explained.

The design and manufacture of moulds for all types of concrete products and all shapes of cast stone are dealt with at length, the descriptions of the best and simplest moulds for each type of product being illustrated by working drawings and illustrations of moulds in wood, plaster, sand, gelatine, concrete, etc.

PRE-CAST CONCRETE FACTORY OPERATION

By H. L. Childe. Price 3*s.* 6*d.* net; by post 4*s.*

This book gives detailed descriptions of a large number of cast-stone and concrete-products factories. The factories described have been selected because of their representative character, and include typical works in different categories. Each works is fully described and illustrated, complete information being given on the manufacturing processes, materials, and plant employed, the lay-out of the plant, etc.